


型名: CKRH8D43

1. 尺寸 (毫米)

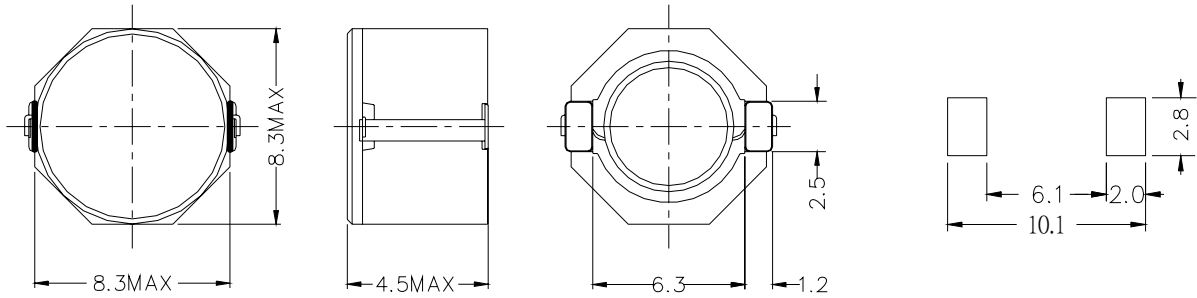

2. 技术参数

NO.	品名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH8D43-2R0	2.0	14	6.98
2	CKRH8D43-3R9	3.9	18	5.85
3	CKRH8D43-4R7	4.7	23	5.54
4	CKRH8D43-6R8	6.8	26	4.38
5	CKRH8D43-100	10	37	4.00
6	CKRH8D43-150	15	54	2.83
7	CKRH8D43-220	22	76	2.60
8	CKRH8D43-330	33	130	2.16
9	CKRH8D43-470	47	153	1.80
10	CKRH8D43-680	68	237	1.47
11	CKRH8D43-101	100	364	1.28

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.

