


型名: CKRH8D43/HP

1. 尺寸(毫米)

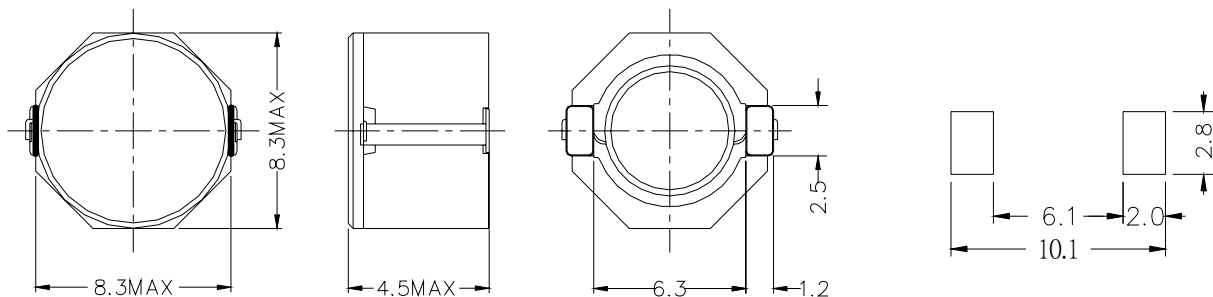

2. 技术参数

NO.	品名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	CKRH8D43/HP-1R2	1.2	18	12.56
2	CKRH8D43/HP-2R7	2.7	21	8.58
3	CKRH8D43/HP-4R7	4.7	29	6.13
4	CKRH8D43/HP-6R8	6.8	37	5.60
5	CKRH8D43/HP-100	10	55	4.26
6	CKRH8D43/HP-150	15	74	3.67
7	CKRH8D43/HP-220	22	128	2.98
8	CKRH8D43/HP-330	33	150	2.49
9	CKRH8D43/HP-470	47	242	1.98
10	CKRH8D43/HP-680	68	365	1.58

无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.

