

- Single receive/transmit isolating module
- Used in T1/E1/CEPT/ISDN-PRI 1.544/2.048 MHz module
- In compliance with the standard of G.703
- Operating Temperature Range 0-70°C





Part Number	Turns Ratio	L (mH)	L <sub>S</sub> (μH max)	C <sub>w/w</sub> (ρ F max)	DCR Pri (Ωmax)	DCR Sec (Ω max)	U (Vrms)	Schematics	Primary Pins
CL1210V	1:1:1(1:2CS)	1.20	0.50	25	0.7	0.70&0.70	1500	2	1-2
CL1212V	1:1	1.20	0.50	25	0.7	0.7	1500	1	1-2
CL1213V	1CT:1	1.20	0.80	25	0.7	0.7	1500	3	1-5
CL1214V	1:1.36	1.20	0.80	35	0.7	0.8	1500	1	5-6
CL1219V	1:2CT	1.20	0.50	40	0.7	1.3	1500	3	2-6
CL1202V	1:1.15CT	1.50	0.60	35	0.7	0.9	1500	3	2-6
CL1203V	1:1/1.26	1.50	0.40	40	0.7	0.9	1500	3	2-6
CL1204V	1CT:2CT	1.20	0.50	30	0.7	1.2	1500	4	1-5
CL1206V	1:1.36CT	1.20	0.80	35	0.7	0.9	1500	5	1-5

## V Package

### Mechanical

Dimension in inch/mm  
Tolerances ±0.10mm

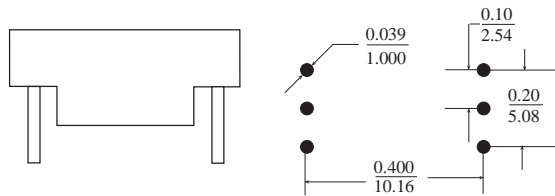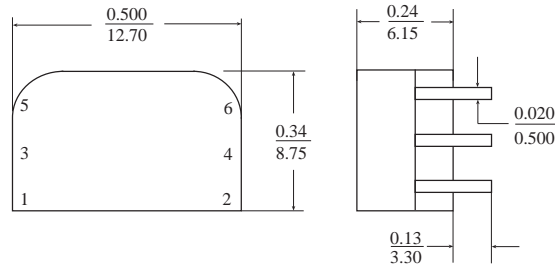

### Schematics

