

# MULTILAYER HIGH CURRENT CHIP INDUCTORS / CL(C) TYPE

## FEATURES

- ◆ High mounting density of compact circuit due to crosstalk elimination that results from a closed magnetic flux in a ferrite material
- ◆ Suitable for flow and re-flow soldering
- ◆ Available in 5 sizes


## APPLICATIONS

- ◆ Personal computers, HDDs, or other various electronic appliances.
- ◆ Any general circuit of portable equipment in which compact size and high mounting densities are required.





## ORDERING CODE

CL 2520C 1R0 □- N

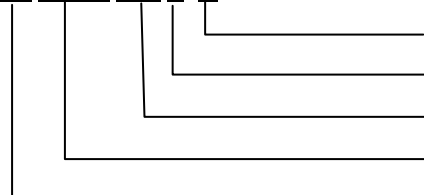

Note: lead-free  
Tolerance (K:±10%, M:±20%)  
Inductance  
Dimension (AxB)  
Product Symbol

## DIMENSIONS UNIT: mm (inch)



A	2.50 ± 0.2	m/m
B	2.00 ± 0.2	m/m
C	0.60 (Max)	m/m
D	0.50 ± 0.3	m/m

## ELECTRICAL CHARACTERISTICS FOR CL2520C

Part No.	Inductance (uH)	Test Freq. (MHz)	DC Resistance (Ω) 30%	Rated Current (A) Max
CL2520C-1R0M-N	1.0	1	0.10	1.50
CL2520C-1R5M-N	1.5	1	0.12	1.40
CL2520C-2R2M-N	2.2	1	0.14	1.30
CL2520C-3R3M-N	3.2	1	0.18	1.20
CL2520C-4R7M-N	4.7	1	0.23	1.00
CL2520C-6R8M-N	6.8	1	0.25	0.90
CL2520C-100M-N	10	1	0.30	0.80



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>