



Chunghwa Picture Tubes, Ltd.

Product Specification

To : HAU DISPLAY

Date : 130516

TFT LCD

CLAA061LA0BCW

ACCEPTED BY : (V0.5)

| APPROVED BY | CHECKED BY | PREPARED BY |
|-------------|------------|-------------|
| 黃奕凱 | 周國慶 | 陳威 |

Prepared by :

Product Planning General Division

CE&Mobile PC Business Unit

CHUNGHWA PICTURE TUBES, LTD.

1127 Hopin Rd., Padeh, Taoyuan, Taiwan 334, R.O.C.
TEL: +886-3-3675151 FAX: +886-3-377-3858

Doc.No: SPEC_CLAA061LA0BCW_V0.5_HAU DISPLAY_130516

Issue Date:

2013/05/16

REVISION STATUS

| Revision Notice | Description | Page | Rev. Date |
|-----------------|--|----------|------------|
| 0.0 | First revision (Tentative) | -- | 2009/10/7 |
| 0.1 | Optical data confirm | 13 | 2010/07/21 |
| 0.2 | Brightness modify | 13 | 2010/08/05 |
| 0.3 | CN2 (BLU connector) Rear Side drawing | 10 14 | 2010/11/29 |
| 0.4 | Optical data fixed | 15 | 2010/12/14 |
| 0.5 | Modify module Weight | 4 | 2013/01/09 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

HAU DISPLAY Only Confidential

CONTENTS

| | |
|---|-----------|
| 1. OVERVIEW | 4 |
| 2. ABSOLUTE MAXIMUM RATINGS | 5 |
| 3. ELECTRICAL CHARACTERISTICS | 6 |
| 3.1 TFT LCD Power Voltage | 6 |
| 3.2 TFT-LCD Current Consumption..... | 7 |
| 3.3 Power 、Signal sequence..... | 7 |
| 3.4 Backlight Unit | 8 |
| 4. INTERFACE CONNECTION | 9 |
| 4.1 CN1 | 9 |
| 5. INPUT SIGNAL | 11 |
| 5.1 Timing Specification..... | 11 |
| 5.2 Timing Sequence (Timing chart)..... | 11 |
| 6. BLOCK DIAGRAM | 13 |
| 7. MECHANICAL DIMENSION | 14 |
| 7.1 Front Side | 14 |
| 7.2 Rear Side..... | 14 |
| 8. OPTICAL CHARACTERISTICS | 15 |
| 9. RELIABILITY TEST CONDITIONS | 17 |
| 9.1. Temperature and humidity..... | 17 |
| 9.2. Shock and Vibration..... | 17 |
| 8.3. ESD | 17 |
| 8.4. Judgment Standard..... | 17 |

1. OVERVIEW

CLAA061LA0BCW is 15.4cm(6.1") color TFT-LCD (Thin Film Transistor Liquid Crystal Display) module composed of LCD panel, driver ICs, control circuit and LED backlight. By applying 800x480 images are displayed on the 6.1" diagonal screen. Display 262K colors by 6 Bit R.G.B signal input.

General specifications are summarized in the following table:

| ITEM | SPECIFICATION |
|------------------------------------|---|
| Display Area (mm) | 136.2(H)x72(V) (6.1-inch diagonal) |
| Number of Pixels | 800(H) x 3(RGB) x 480(V) |
| Pixel Pitch (mm) | 0.17025(H) x 0.150(V) |
| Color Pixel Arrangement | RGB vertical stripe |
| Display Mode | Normally white, TN |
| Number of Colors | 262,144 |
| Optimum Viewing Angle | 6 o'clock(Max.Contrast, Gray level inversion) |
| Brightness (cd/m ²) | 500nit(Typ) |
| Response Time (Tr+Tf) | 20ms (Typ) |
| Viewing Angle(BL on, CR \geq 10) | 140 Degree(Horizontal) ; 120 Degree(Vertical) |
| Power Consumption (W) | 1.7(Typ) |
| Electrical Interface(data) | TTL |
| Module Size (mm) | 149.0(W)x82.9(H)x5.0(D) |
| Module Weight (g) | 110g (Typ) |
| Backlight Unit | LED |
| Surface Treatment | Anti-Glare type , Hardness:3H |

2. ABSOLUTE MAXIMUM RATINGS

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.


| Item | Symbol | Min. | Max. | Unit | Note |
|--------------------------------|---------------------|------|------|------|----------|
| Digital Supply Voltage | V _{cc} | -0.5 | 5.0 | V | |
| Analog Supply Voltage | AVDD | -0.5 | 13.5 | V | |
| Gate On Voltage | V _{GH} | -0.3 | 40 | V | |
| Gate Off Voltage | V _{GL} | -20 | 0.3 | V | |
| Gate On-Gate Off Voltage | V _{GH-VGL} | -0.3 | 40 | V | |
| Forward Current(per LED) | I _f | - | 30 | mA | |
| Reverse Voltage(per LED) | V _R | | 5 | V | |
| Pulse Forward Current(per LED) | I _{fp} | | 100 | mA | 【Note 2】 |
| Operation Temperature | T _{op} | -20 | 70 | °C | 【Note 1】 |
| Storage Temperature | T _{stg} | -30 | 80 | °C | 【Note 1】 |

【Note】

【Note1】 If users use the product out off the environmemt operation range (temperature and humidity) ,it will concern for visual quality.

【Note2】 I_{fp} Conditions : Pulse Width ≤ 10msec · Duty ≤ 1/10.

【Note3】 Each LED Operation must be follow diagram of Ambient Temperature and Allowable Forward Current.

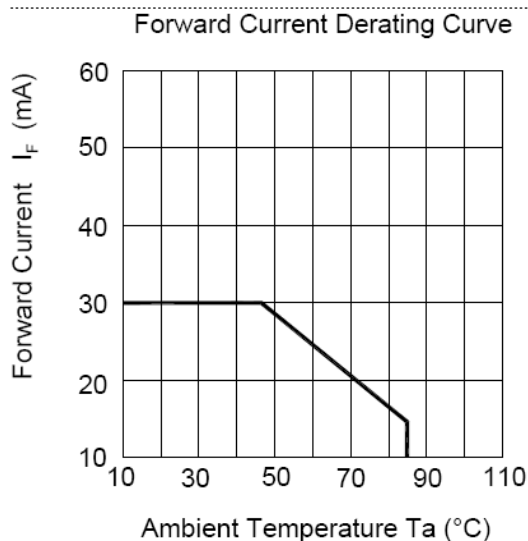

3. ELECTRICAL CHARACTERISTICS

3.1 TFT LCD Power Voltage

Ta=25°C

| Item | Symbol | Min. | Typ. | Max. | Unit. | Note |
|------------------------|--------|--------|------|--------|-------|---------|
| Digital Supply Voltage | VCC | 3 | 3.3 | 3.6 | V | |
| Analog Supply Voltage | AVDD | 8.7 | 9.2 | 9.8 | V | |
| Gate On Voltage | VGH | 17 | 18 | 19 | V | |
| Gate Off Voltage | VGL | -6.6 | -6 | -5.4 | V | |
| Common Voltage | VCDC | 3.28 | 3.38 | 3.48 | V | 【Note1】 |
| Gamma Voltage | V1 | - | 8.37 | - | V | |
| | V2 | - | 6.89 | - | V | |
| | V3 | - | 6.49 | - | V | |
| | V4 | - | 6.15 | - | V | |
| | V5 | - | 5.23 | - | V | |
| | V6 | - | 3.71 | - | V | |
| | V7 | - | 2.79 | - | V | |
| | V8 | - | 2.45 | - | V | |
| | V9 | - | 2.05 | - | V | |
| | V10 | - | 0.57 | - | V | |
| Logic Input Voltage | VIH | 0.7VCC | - | VCC | V | |
| | VIL | GND | - | 0.3VCC | V | |

【Note】

【Note1】 Please adjust VCDC to make the flicker level be minimum.

3.2 TFT-LCD Current Consumption


| Item | Symbol | Condition | Min. | Typ. | Max. | Unit. | Note |
|-------------------------|--------|--------------|------|-------|------|-------|---------|
| Gate on Current | IVGH | VGH = 18 V | - | 0.5 | 1 | mA | 【Note1】 |
| Gate off Current | IVGL | VGL = -6 V | - | 0.5 | 1 | mA | 【Note1】 |
| Digital Current | IVCC | VCC = 3.3V | - | 5 | 10 | mA | 【Note1】 |
| Analog Current | IAVDD | AVDD = 9.2 V | - | 35 | 45 | mA | 【Note1】 |
| Total Power Consumption | PC | | - | 350.5 | 471 | mW | 【Note1】 |

【Note】

【Note1】 Typical: Under 64 gray pattern
Maximum: Under black pattern



(a) Gray-level Pattern




(b) Black Pattern

3.3 Power · Signal sequence

Power On : VCC→AVDD/VGL→VGH→Video & Logic Signal

Power Off : Video & Logic Signal→VGH→AVDD/VGL→VCC

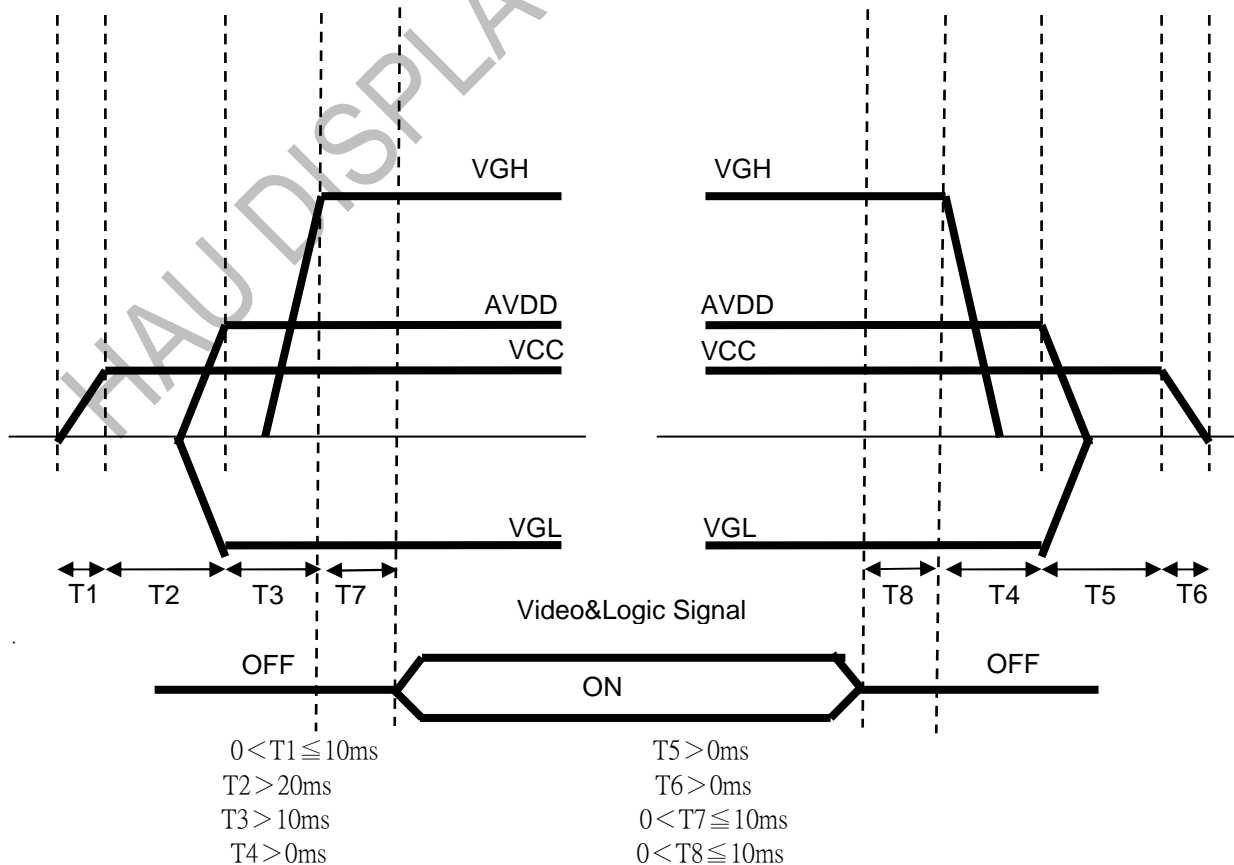


3.4 Backlight Unit

Ta=25°C

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | Note |
|-------------------|--------|---------------------------|-------|-------|------|------|------|
| LED current | IL | Ta=25°C, Each serial=20mA | -- | 140 | -- | mA | |
| LED voltage | VL | Ta=25°C, Each serial=20mA | 8.7 | 9.6 | 10.5 | V | |
| Power consumption | WL | Ta=25°C, Each serial=20mA | -- | 1.344 | -- | W | |
| LED Lift Time | N/A | Ta=25°C, IF=20mA | 30000 | -- | -- | Hour | |
| | N/A | Ta=60°C, IF=20mA | 15000 | -- | -- | Hour | |

Note:

*1)LED Circuit Diagram

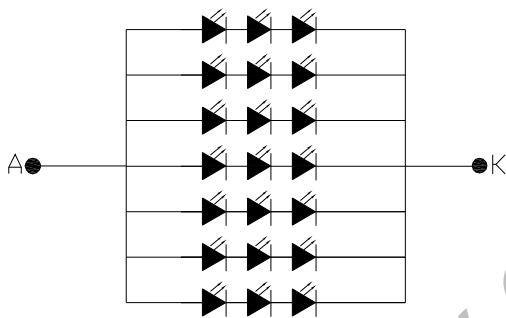

*2)A : Anode(+) , K : Cathode(-)

*3)We suggest using the constant current control to avoid the leakage light and brightness quality issue.

*4)Definition of LED lifetime : Luminance < Initial luminance 50%.

4. INTERFACE CONNECTION

4.1 CN1

| Pin NO. | SYMBOL | DESCRIPTION |
|---------|--------|--|
| 1 | GND | Power Ground |
| 2 | DIO1 | Horizontal start Pulse Signal I/O |
| 3 | NC | NC |
| 4 | VR 1 | Gamma Voltage Level 1 |
| 5 | VR 2 | Gamma Voltage Level 2 |
| 6 | VR 3 | Gamma Voltage Level 3 |
| 7 | VR 4 | Gamma Voltage Level 4 |
| 8 | VR 5 | Gamma Voltage Level 5 |
| 9 | VR 6 | Gamma Voltage Level 6 |
| 10 | VR 7 | Gamma Voltage Level 7 |
| 11 | VR 8 | Gamma Voltage Level 8 |
| 12 | VR 9 | Gamma Voltage Level 9 |
| 13 | VR 10 | Gamma Voltage Level 10 |
| 14 | D00 | Red Data (LSB) |
| 15 | D01 | Red Data |
| 16 | D02 | Red Data |
| 17 | D03 | Red Data |
| 18 | D04 | Red Data |
| 19 | D05 | Red Data (MSB) |
| 20 | D10 | Green Data (LSB) |
| 21 | D11 | Green Data |
| 22 | D12 | Green Data |
| 23 | D13 | Green Data |
| 24 | D14 | Green Data |
| 25 | D15 | Green Data (MSB) |
| 26 | D20 | Blue Data (LSB) |
| 27 | D21 | Blue Data |
| 28 | D22 | Blue Data |
| 29 | D23 | Blue Data |
| 30 | D24 | Blue Data |
| 31 | D25 | Blue Data (MSB) |
| 32 | LD | Latch The Polarity of Output and Switch The New Data to Output |
| 33 | SHL | Select Left / Right Shift |
| 34 | AVDD | Power Supply for Analog Circuit |
| 35 | AVDD | Power Supply for Analog Circuit |
| 36 | GND | Power Ground |
| 37 | GND | Power Ground |
| 38 | CLK | Horizontal Clock |
| 39 | VCC | Digital Power +3.3V |
| 40 | DIO2 | Horizontal start Pulse Signal I/O |
| 41 | GND | Power Ground |
| 42 | GND | Power Ground |
| 43 | GND | Power Ground |
| 44 | STV2 | Vertical start Pulse Signal I/O |
| 45 | UD | Up / Down Control Pin |
| 46 | OEV | Output Enable |
| 47 | VCLK | Vertical Clock |
| 48 | GND | Power Ground |
| 49 | GND | Power Ground |
| 50 | POL | Polarity Selection |
| 51 | XON | Gate Output all-on control |
| 52 | NC | NC |
| 53 | VGL | Gate OFF Voltage -6V |
| 54 | NC | NC |
| 55 | VGH | Gate ON Voltage +18V |
| 56 | NC | NC |

| | | |
|----|------|---------------------------------|
| 57 | STV1 | Vertical start Pulse Signal I/O |
| 58 | NC | NC |
| 59 | VCOM | Common Voltage |
| 60 | VCOM | Common Voltage |

NOTE:

- 1) GND Pin must ground contact , can not be floating.
- 2)SHL : Select left or right

| SHL | DIO1 | DIO2 | SHIFT |
|-----|--------|--------|-------|
| 1 | Input | Output | Right |
| 0 | Output | Input | Left |

- 3)UD : Shift up or down control

| UD | STV1 | STV2 | SHIFT |
|----|--------|--------|-------|
| 1 | Input | Output | UP |
| 0 | Output | Input | Down |

- 4)XON : Gate Output all-on control
As XON is low then all output pins are forced to VGH level.

- 5) CN2 (BLU connector)

| Pin No. | SYMBOL | FUNCTION |
|---------|--------|----------|
| 1 | A | Anode |
| 2 | K | Cathode |

Note :

Input connector : BHSR-02VS-1(JST)
Outlet connector: SM02B-BHSS-1(JST)

5. INPUT SIGNAL

5.1 Timing Specification

5.1.1 Horizontal Timing Specification


| ITEM | SYMBOL | SPECIFICATION | | | UNIT |
|-------------------------------|--------|---------------|-----|-----|------|
| | | Min | Typ | Max | |
| CLK Frequency | 1/Tcph | 25 | 32 | 40 | MHz |
| CLK Pulse Width | Tcw | 40% | - | 60% | ns |
| Data Set-up Time | Tsu | 4 | - | - | ns |
| Data Hold Time | Thd | 2 | - | - | ns |
| Propagation Delay of DIO2/1 | Tphl | 6 | 10 | 15 | ns |
| Time That The Last Data to LD | Tld | 1 | - | - | Tcph |
| Pulse Width of LD | Twid | 2 | - | - | Tcph |
| Time That LD to DIO1/2 | Tlds | 5 | - | - | Tcph |
| POL Set-up Time | Tpsu | 6 | - | - | ns |
| POL Hold Time | Tphd | 6 | - | - | ns |


5.1.2 Vertical Timing Specification

| ITEM | SYMBOL | SPECIFICATION | | | UNIT |
|----------------------------|--------|---------------|-----|-----|------|
| | | Min | Typ | Max | |
| VCLK Frequency | 1/Tcpv | - | - | 200 | Khz |
| VCLK Pulse Width | Tcpvh | 2.5 | - | - | μs |
| STVD/STVU Set-up Time | Tsu | 700 | - | - | ns |
| STVD/STVU Hold Time | Thd | 700 | - | - | ns |
| Output Enabled pulse width | Twoe | 1 | - | - | us |


5.2 Timing Sequence (Timing chart)

5.2.1 Horizontal Timing Sequence

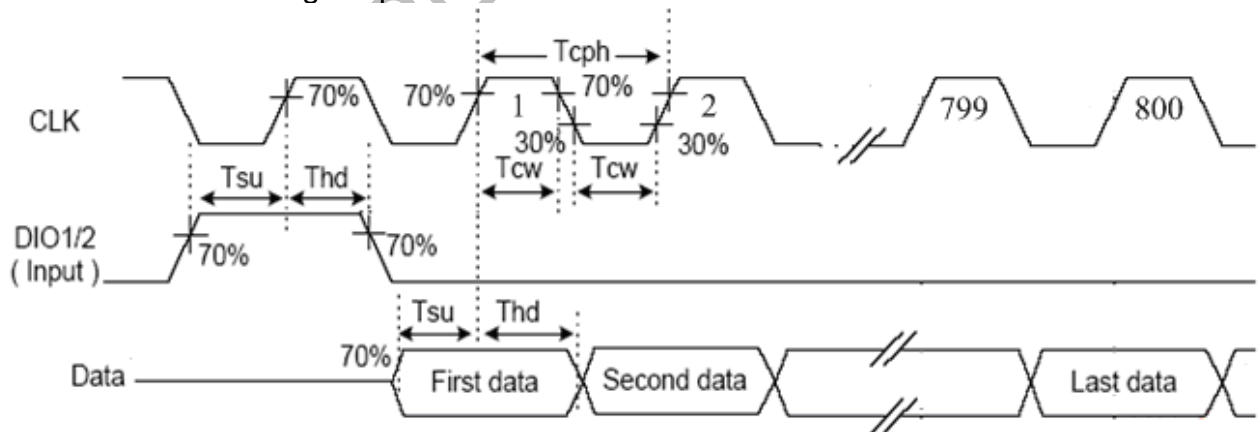


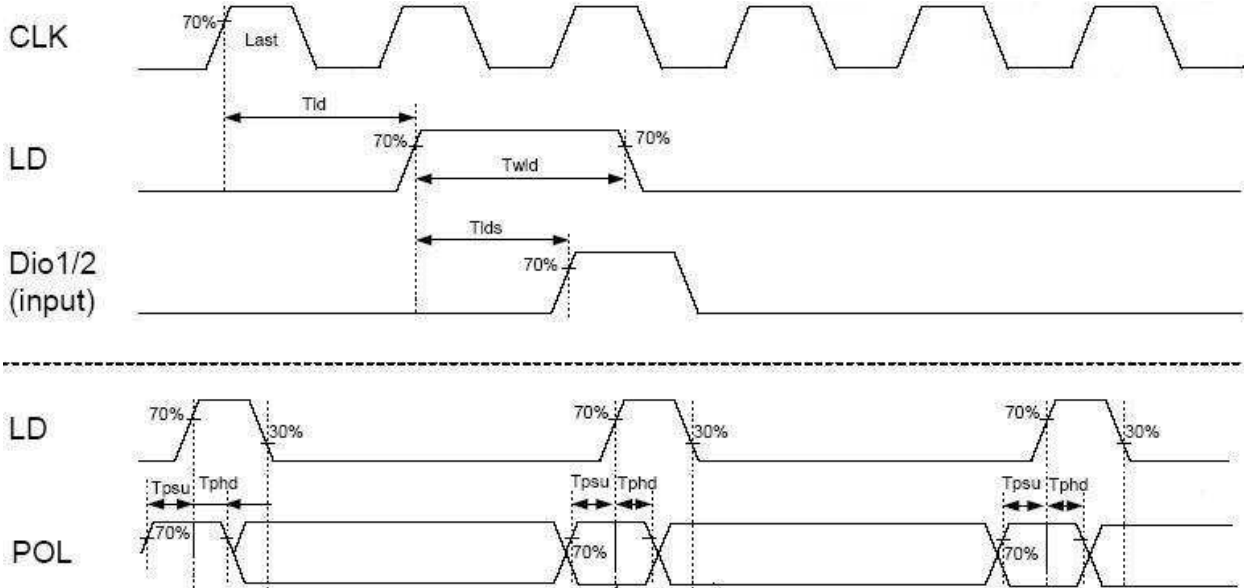

5.2.2 Vertical Timing Sequence

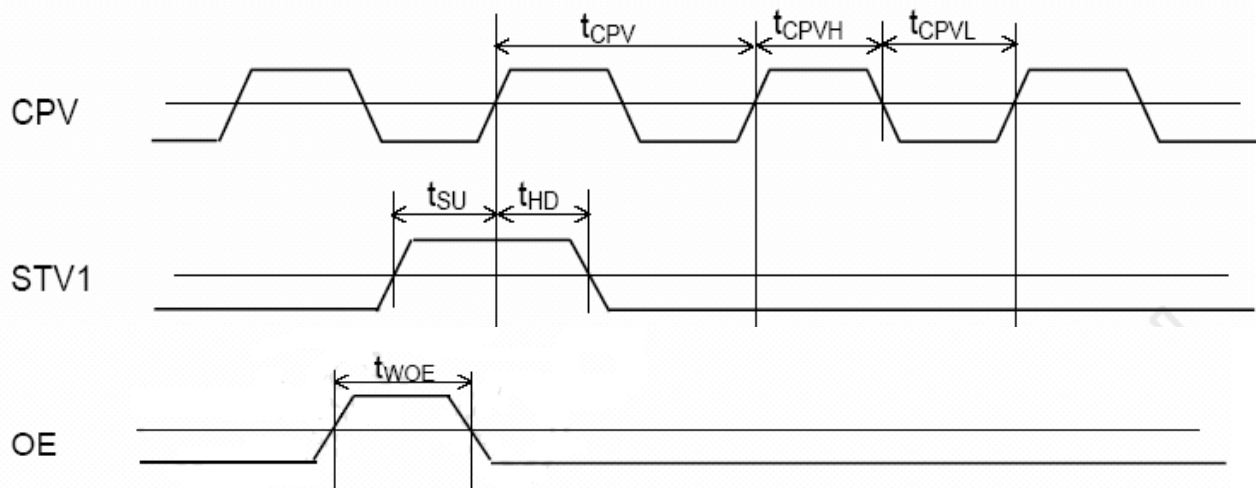

6. BLOCK DIAGRAM

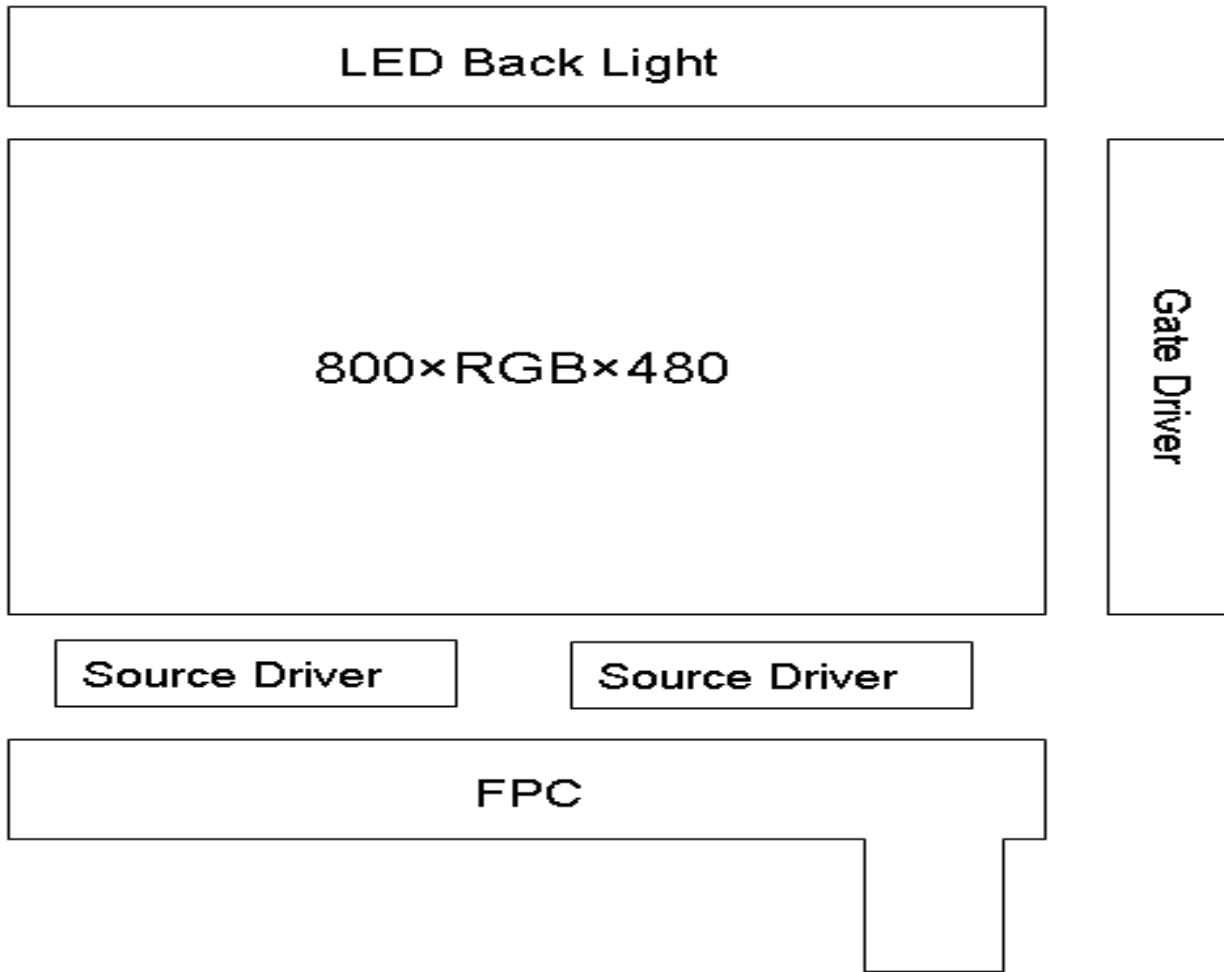


HAU DISPLAY

7. MECHANICAL DIMENSION



7.1 Front Side

[Unit : mm]

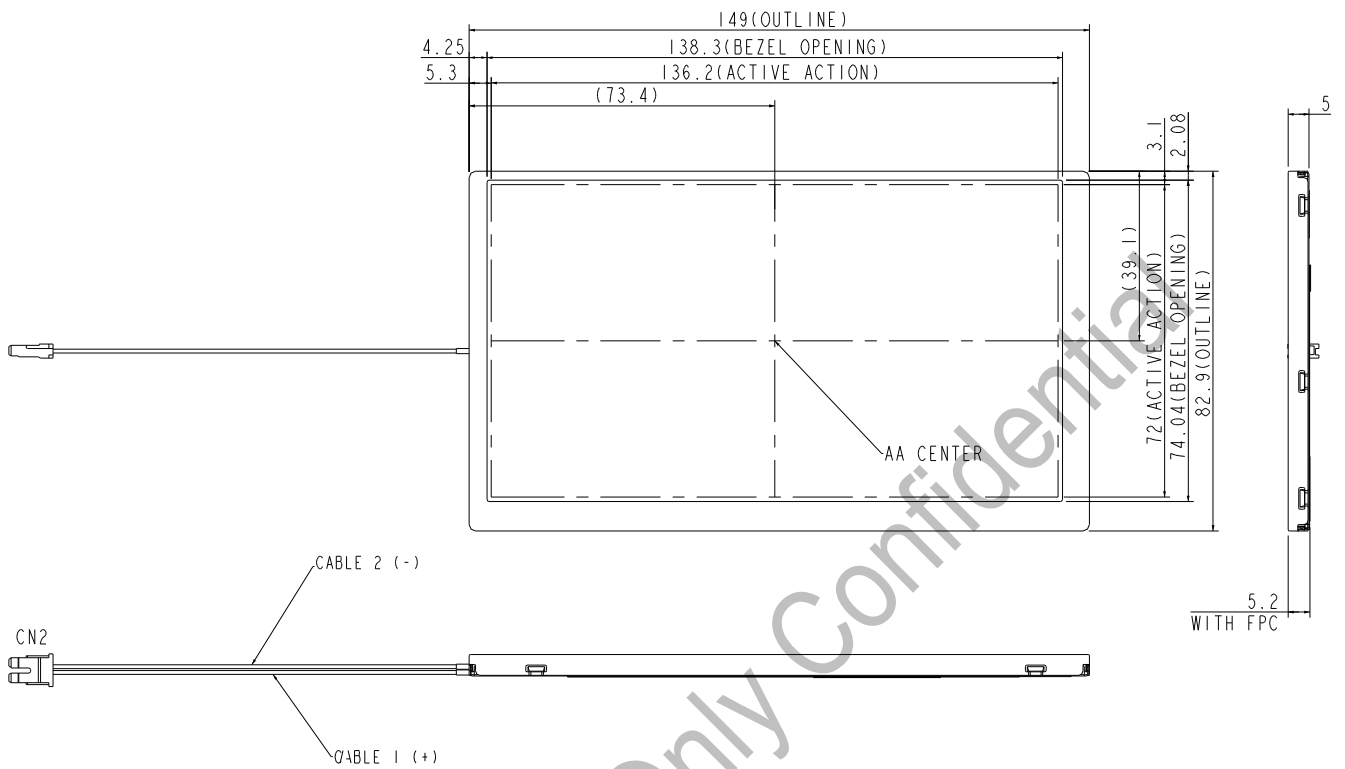

7.2 Rear Side

[Unit : mm]

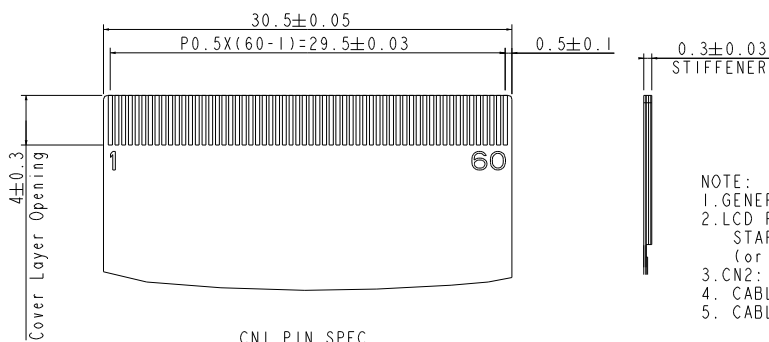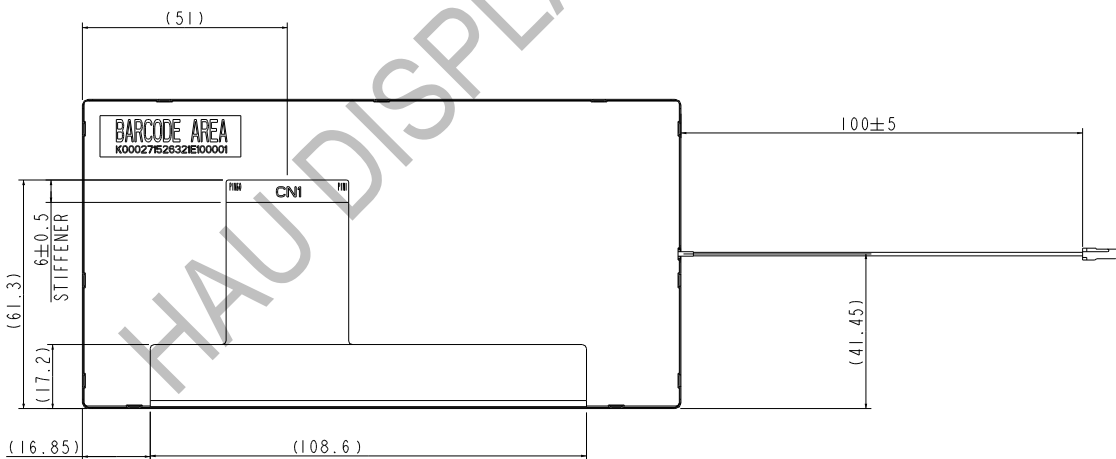

- NOTE:
1. GENERAL TOLERANCE: ±0.3mm
 2. LCD Panel FPC suggested connector (CN1): STARCONN 089K60-000100-G2-R (or other compatible connectors)
 3. CN2: BHSR-02VS-1 (JST)
 4. CABLE 1: UL 10368 (BLACK)
 5. CABLE 2: UL 10368 (WHITE)


8. OPTICAL CHARACTERISTICS

 $T_a = 25^\circ\text{C}, V_{CC} = 3.3\text{V}$

| ITEM | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT | Note | |
|----------------------------------|------------|-----------|--------------------------------------|----------------|----------------|-------------------|--------|-----------|
| Contrast Ratio | CR | Point-5 | 320 | 400 | -- | -- | *1)*2) | |
| Luminance*) | Lw | Point-5 | 400 | 500 | -- | cd/m ² | *1)*3) | |
| Luminance Uniformity | ΔL | | -- | 80 | -- | % | *1)*4) | |
| Response Time (White - Black) | Tr+ Tf | Point-5 | -- | 20 | 30 | ms | *6) | |
| Viewing Angle | Horizontal | ψ | CR \geq 10 Point-5 | 120 | 140 | -- | ° | *1)*2)*5) |
| | Vertical | | | θ | 100 | 120 | -- | ° |
| Color Coordinate | White | Wx Wy | $\theta = \phi = 0^\circ$ Point-5 | 0.273 0.289 | 0.313 0.329 | 0.353 0.369 | -- | *1) |
| | Red | Rx Ry | | 0.578 0.320 | 0.618 0.360 | 0.658 0.400 | | |
| | Green | Gx Gy | | 0.271 0.575 | 0.311 0.615 | 0.351 0.655 | | |
| | Blue | Bx By | | 0.114 0.000 | 0.154 0.040 | 0.194 0.080 | | |

Note :

*1) Measure condition : $25^\circ\text{C} \pm 2^\circ\text{C}$, $60 \pm 10\% \text{RH}$, under 10 Lux in the dark room. BM-5A (TOPCON) , viewing angle 2° . $V_{CC} = 3.3\text{V}$, LED current = 140mA (Each serial = 20mA) , after 10 minutes operation.

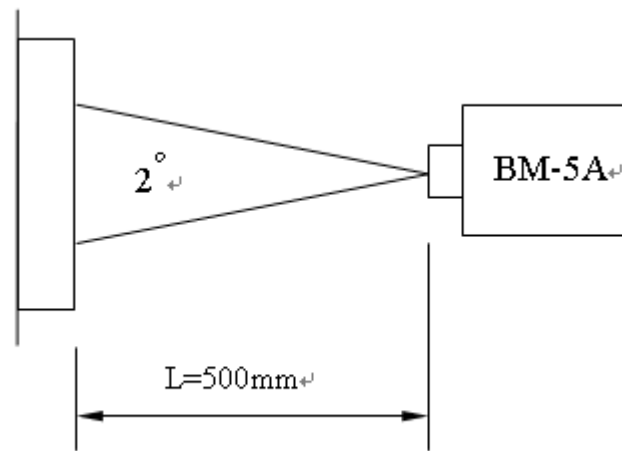

*2) Definition of contrast ratio :

Measure the point-5 as figure 8-1

$$\text{Contrast Ratio (CR)} = (\text{White}) \text{ Luminance of ON} \div (\text{Black}) \text{ Luminance of OFF}$$

*3) Definition of luminance :

Measure white luminance on the points-5 as figure 8-1

*4) Definition of Luminance Uniformity :

Measure white luminance on the point 1~9 as figure 8-1

$$\Delta L = [L(\text{MIN})/L(\text{MAX})] \times 100$$

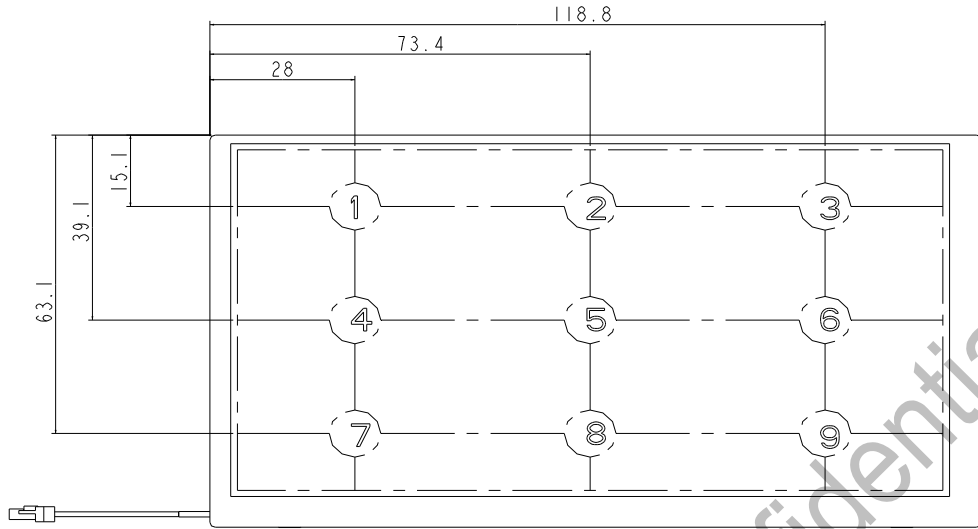


Fig8-1 Measuring point

*5) Definition of Viewing Angle(θ, ψ), refer to Fig8-2 as below :

These items are measured by EZ-CONTRAST (ELDIM) in the dark room. (no ambient light).

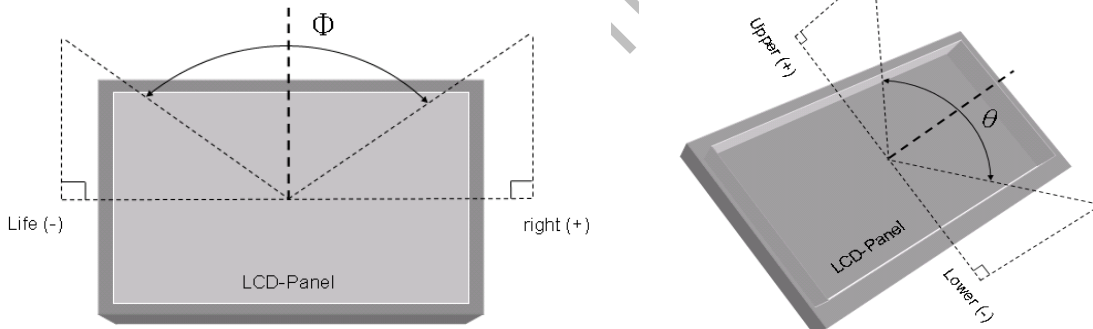


Fig8-2 Definition of Viewing Angle

*6) Definition of Response Time.(White-Black)

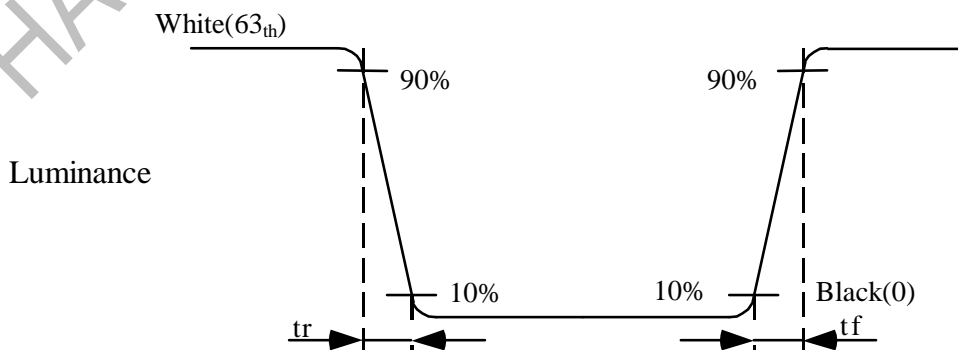


Fig8-3 Definition of Response Time(White-Black)

9. RELIABILITY TEST CONDITIONS

9.1. Temperature and humidity

| TEST ITEMS | CONDITIONS | NOTE |
|--|--|-----------------|
| High Temperature Operation | 70°C , 240Hrs | |
| High Temperature Storage | 80°C , 240Hrs | |
| High Temperature High Humidity Operation | 60°C , 90%RH , 240Hrs | No Condensation |
| Low Temperature Operation | -20°C , 240Hrs | |
| Low Temperature Storage | -30°C , 240Hrs | |
| Thermal Shock(Non-operation) | -30°C (0.5Hr) ~ 85°C(0.5Hr) 200 cycles | |

9.2. Shock and Vibration

| TEST ITEMS | CONDITIONS |
|------------------------------|--|
| Shock (Non-operation) | 100G 6ms 1/2 Sine wave,. ±X , ±Y , ±Z , each axis 3times. |
| Vibration (Non-operation) | Frequency range: 8~33.3Hz Stoke: 1.3mm Vibration: sin wave (x, y, z axis: 2Hrs) Sweep: 2.9G, 33.3Hz-400Hz Cycle: 15min |

8.3. ESD

| ITEM | CONDITION | REMARK |
|------|---|--------|
| ESD | 150pF , 330Ω , ±8KV contact test & ±15KV air test | *1) |

NOTE:

- *1) LCD glass and metal bezel ◦
- *2) IF connector pins ◦

8.4. Judgment Standard

The Judgment of the above test should be made as follow:

Pass:Normal display image with no obvious non-uniformity and no line defect.Partial transformation of the module parts should be ignored.

Fail:No display image,obvious non-uniformity,or line defect.