

CLP3MHz-2786
For oversampling (Fs x2)

[Inquire](#)

Application


for video signal processing

Characteristics

CLP3MHz-2786	
Zin/Zout	470 ohm (Unbaranced)
Insertion Loss	1.0+/-0.1dB max (at 200KHz)
Pass Band Ripple	+/-0.15dB max (0.1 up to 3MHz)
Attnuation	20dB min (at 6.75MHz)
	40dB min (10.5 up to 15MHz)
Group Deray	183+/- 10ns max (0.1 up to 3MHz)


Dimensions

Dimension (Unit : mm)

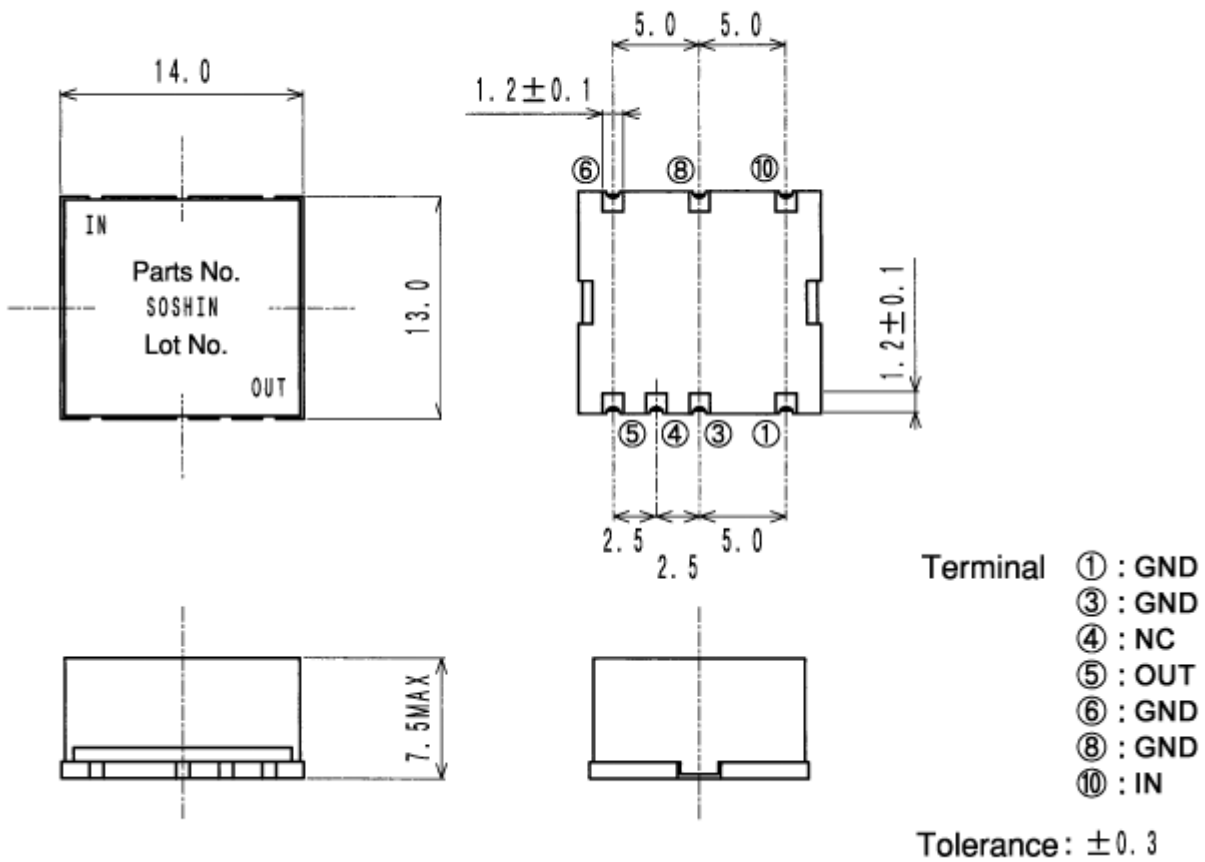

Frequency Data

CLP3MHz-2786

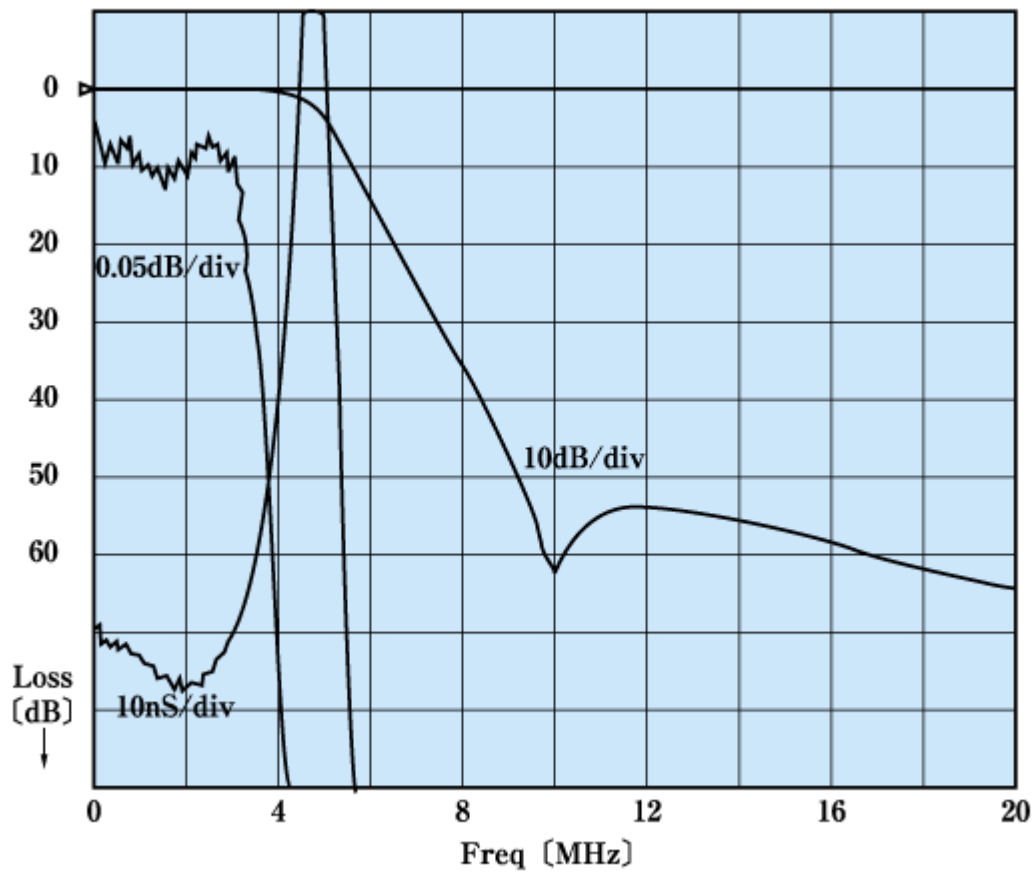

► Products li