

CLP6MHz-2785

For oversampling (Fs x2)

Inquiry

Application


for video signal processing

Characteristics

CLP6MHz-2785	
Zin/Zout	150 ohm (Unbaranced)
Insertion Loss	0.75+/-0.1dB max (at 200KHz)
Pass Band Ripple	+/-0.1dB max (0.1 up tp 6MHz)
Attnuation	20dB min (at 13.5MHz)
	40dB min (21 up to 30MHz)
Group Deray	96+/-5ns max (0.1 up to 6MHz)


Dimensions

Dimension (Unit : mm)

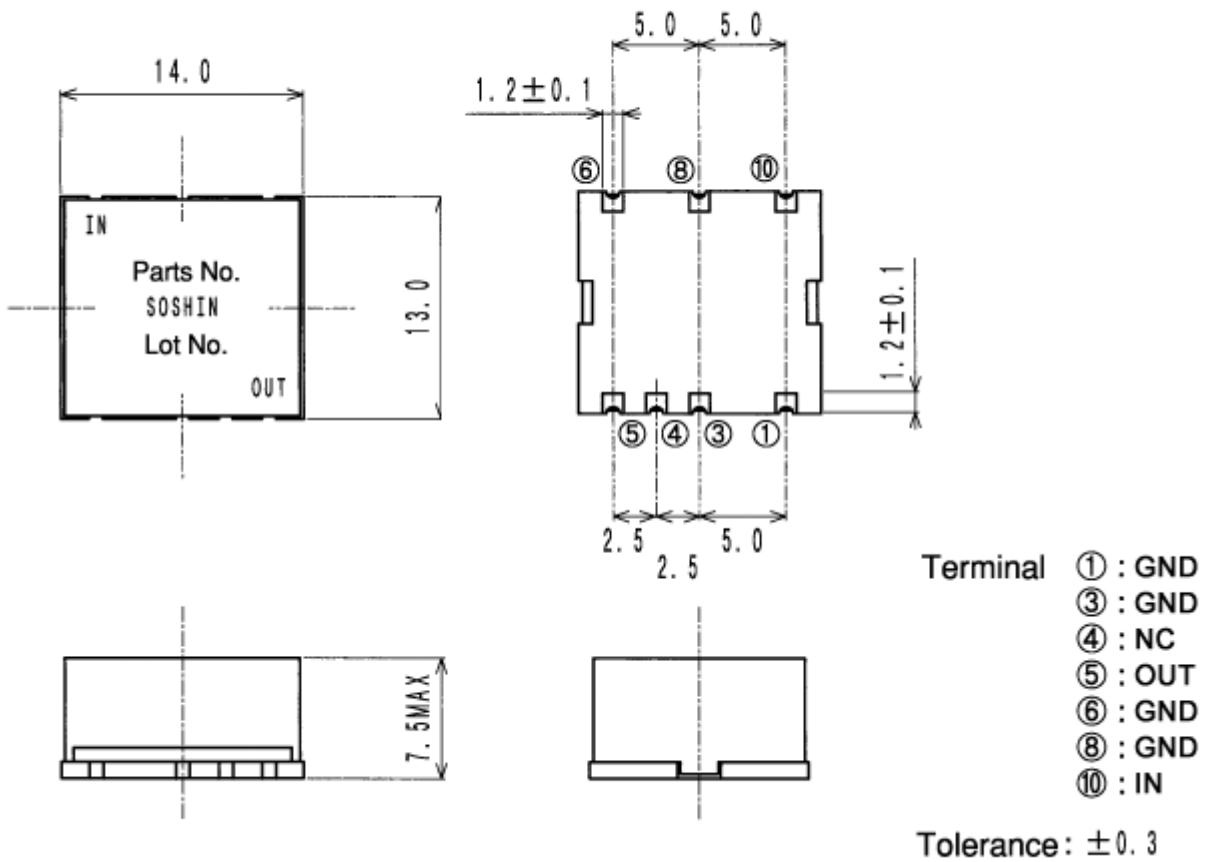

Frequency Data

CLP6MHz-2785

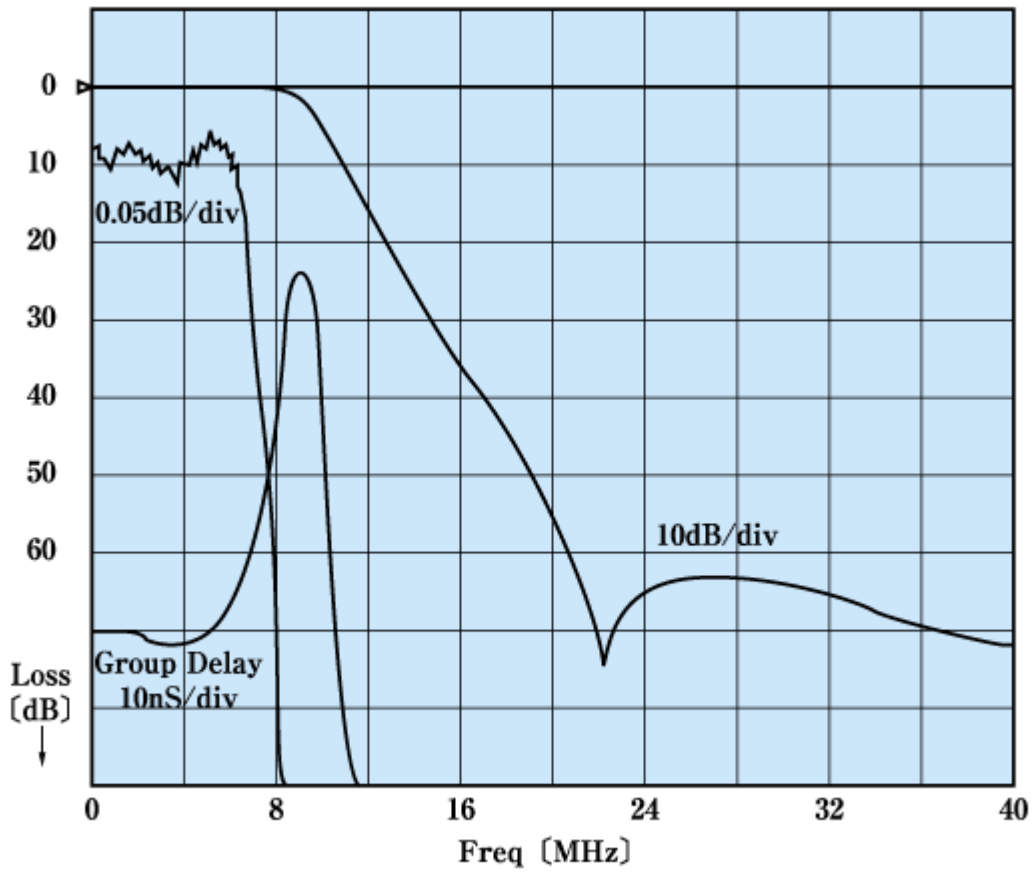

► Products li