

CLT-18-2004

Temperature Compensated Amplifier


2 GHz - 18 GHz

This Amplifier offers exceptional performance over the band 2 GHz to 18 GHz with 12 dBm P1dB output power and 30 dB Gain.

Teledyne Microwave amplifiers are balanced or feedback designs and manufactured with the latest MIC & MMIC technology. The GaAs FET's used in these amplifiers are well established proven devices from multiple sources.

Teledyne Microwave offers a complete line of Narrow and broadband Amplifiers covering the frequency range 500 MHz to 40 GHz. These products are available in either connectorized packages or as modules. For a complete list of these products and more, please visit our website.

Other products from Teledyne Microwave include: Transceivers, Synthesizers, and YIG Products

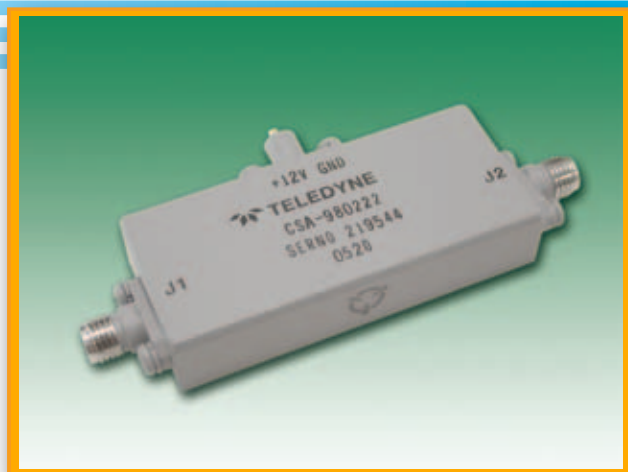

Specifications:

DataSheet4U.com

Model Number: CLT-18-2004
 Frequency Range: 2 GHz - 18 GHz
 Gain (min): 30 dB
 Gain Vs Temp at any Frequency: +/-1.00 dB
 Noise Figure (max): 7 dB
 Output Power @ 1dB Compression: 12 dBm
 Gain Flatness Vs Frequency: +/-2.0 dB
 3rd Order Intercept (Typ): 19 dBm
 Power Supply:
 Input Voltage: 11.5 to 15 VDC
 Current @ 12 VDC (typ): 270 mA
 Current @ 12 VDC (max): 300 mA
 Case Type (See attached Outline): SX4
 Temperature Range: -54 to +90C




ISO 9001:2000

CLT-18-2004

Temperature Compensated Amplifier

2 GHz - 18 GHz

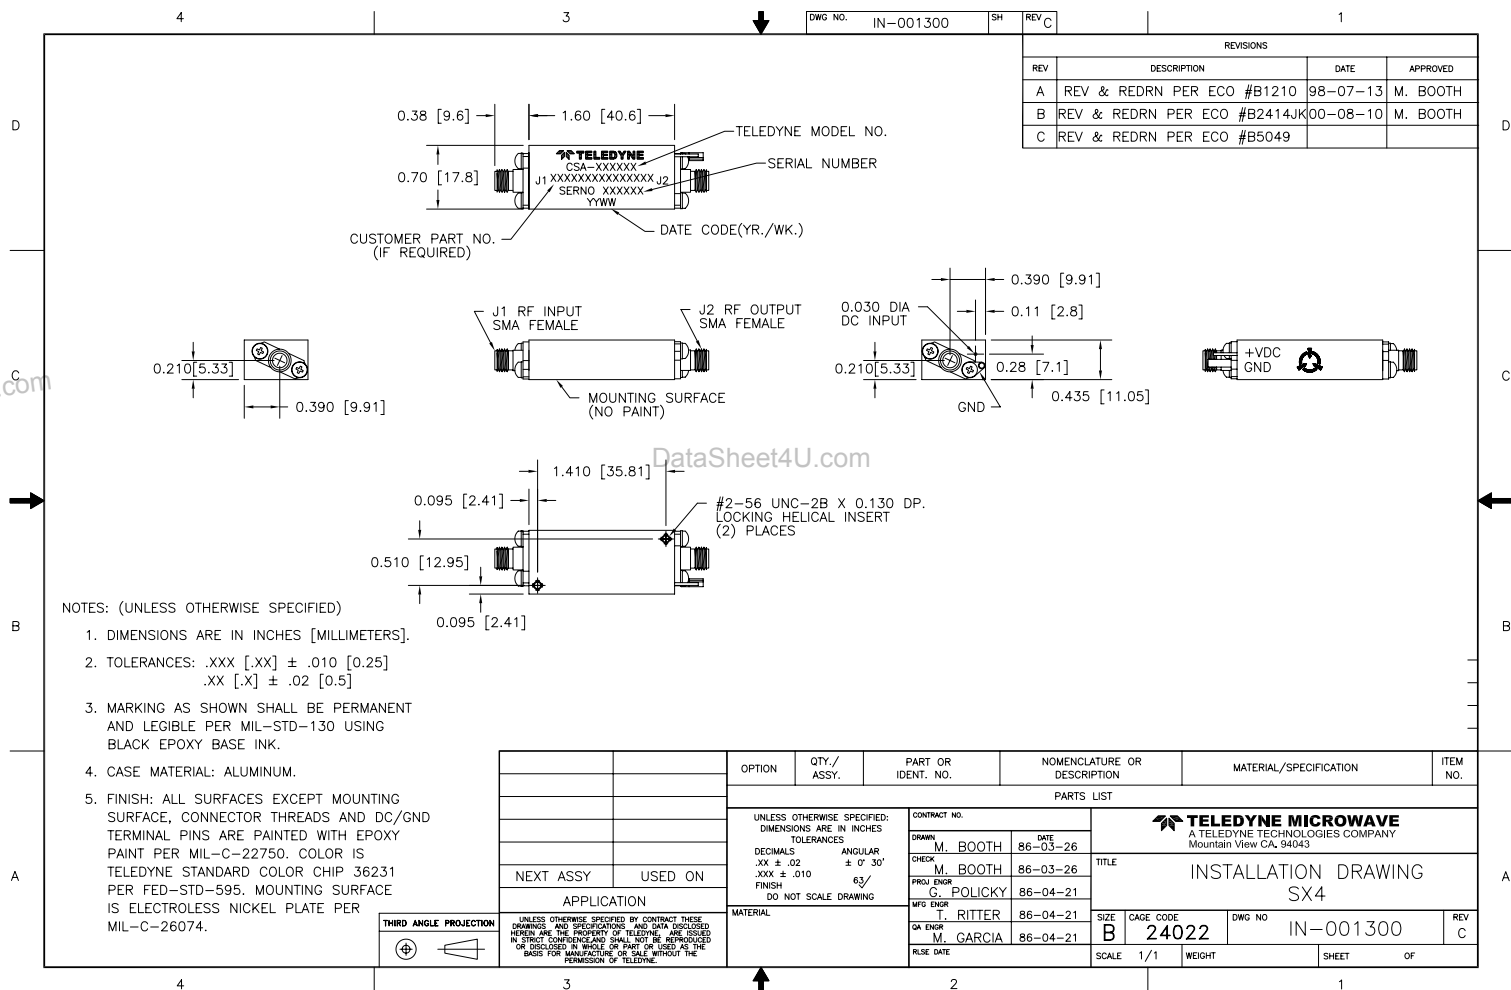

ISO 9001:2000