

14118 Stowe Drive, Suite B
 Poway, CA 92064
 TEL: (858) 621-2700 | FAX: (858) 486-1927
 URL: www.zcomm.com
 EMAIL: applications@zcomm.com

Voltage-Controlled Oscillator Surface Mount Module

Applications

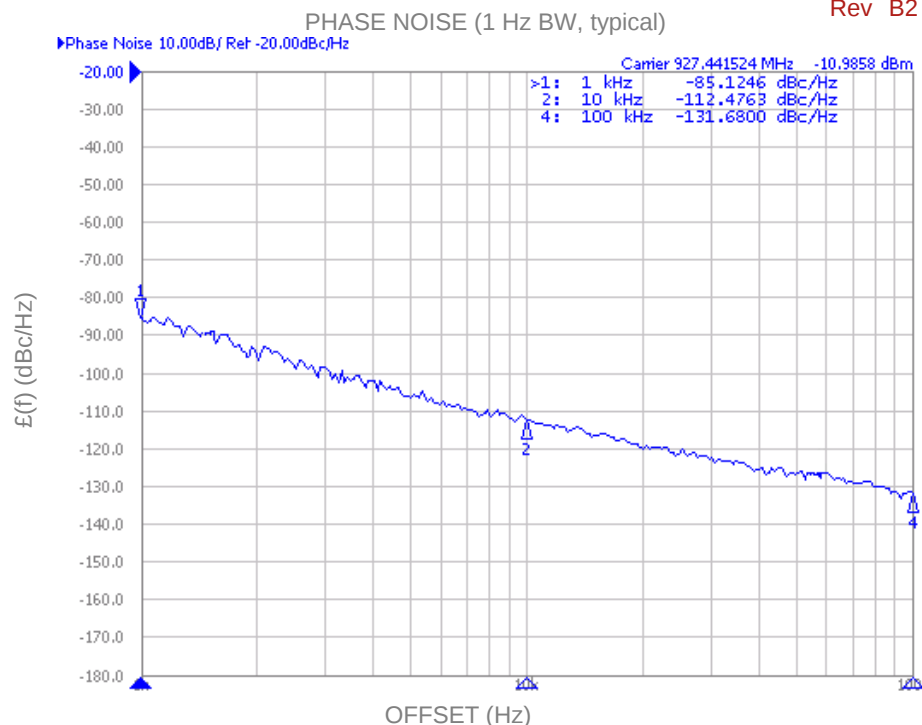
- WLANs
- Portable Radios
- SMRs

Application Notes

- AN-101: Mounting and Grounding
- AN-102: Output Loading
- AN-107: Manual Soldering

CLV0925E-LF

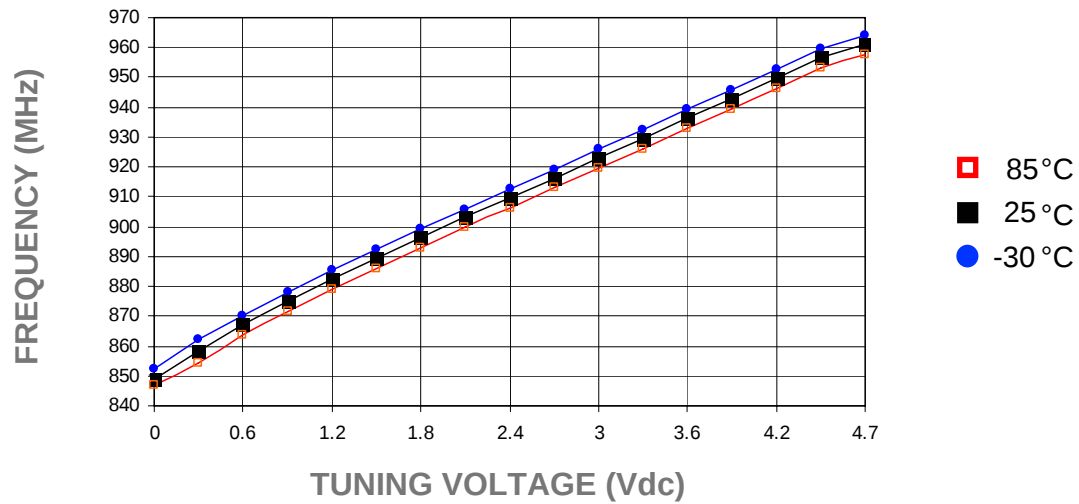
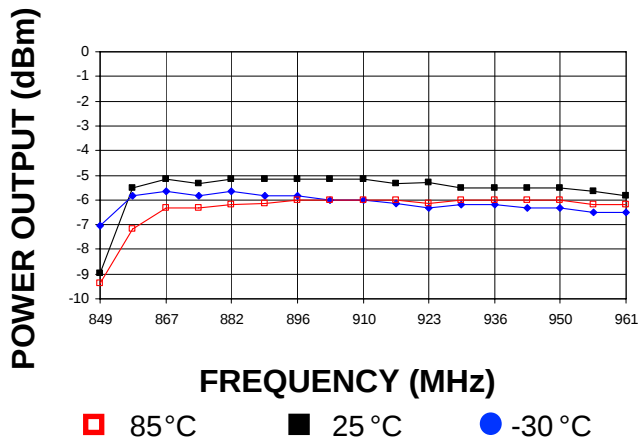
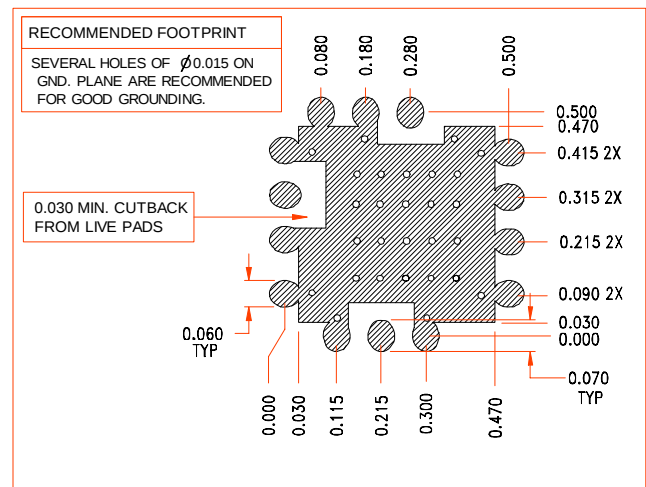
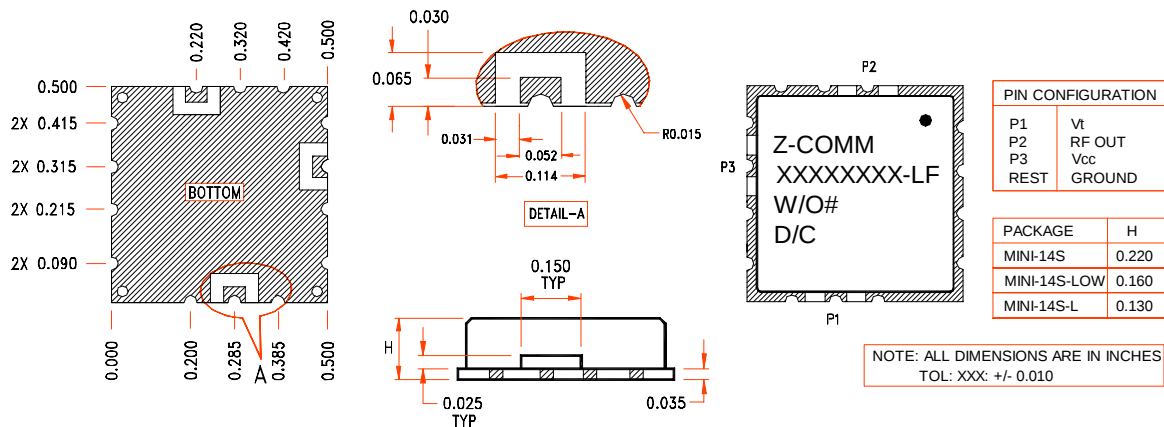
Rev B2



Performance Specifications	Min	Typ	Max	Units
Oscillation Frequency Range	896		959	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-111		dBc/Hz
Harmonic Suppression (2nd)		-24	-22	dBc
Tuning Voltage	0.3		4.7	Vdc
Tuning Sensitivity (avg.)		20		MHz/V
Power Output	-7	-5	-3	dBm
Load Impedance		50		Ω
Input Capacitance			100	pF
Pushing			1	MHz/V
Pulling (14 dB Return Loss, Any Phase)			1	MHz
Operating Temperature Range	-30		85	$^{\circ}\text{C}$
Package Style	MINI-14S			

Power Supply Requirements	Min	Typ	Max	Units
Supply Voltage (Vcc, nom.)		5		Vdc
Supply Current (Icc)		12	15	mA

Additional Notes

Tuning Curve, typ.

Power Curve, typ.

Footprint

Physical Dimensions


LFSuffix = RoHS Compliant. All specifications are subject to change without notice.