

## GENERAL DESCRIPTION

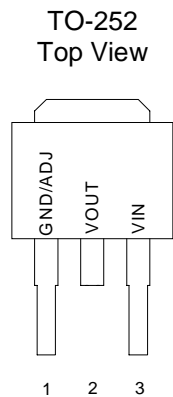
The CM1085 series of high performance positive voltage regulators are designed for use in applications requiring low dropout performance at full rated current. Additionally, the CM1085 series provides excellent regulation over variations in line, load and temperature.

Outstanding features include low dropout performance at rated current, fast transient response, internal current limiting and thermal shutdown protection of the output device. The CM1085 series are three terminal regulators with adjustable voltage options available in popular packages.

## APPLICATIONS

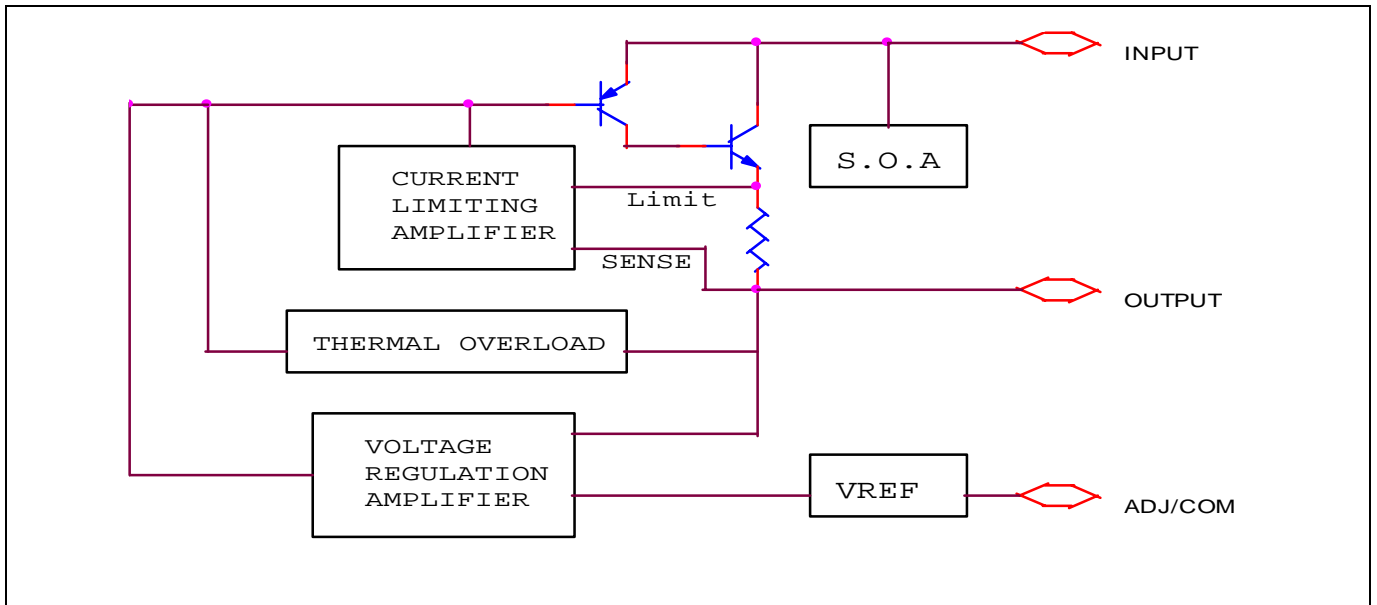
- ◆ Power Supplies
- ◆ Computer Add-On Cards
- ◆ Other Applications Requiring Low Dropout Voltage Over Rated Current

## PIN CONFIGURATION



## FEATURES

- ◆ Low dropout performance
- ◆ 1.3V max. for CM1085
- ◆ Full current rating over line and temperature
- ◆ Fast transient response
- ◆  $\pm 2\%$  total output regulation over line, load and temperature
- ◆ Adjust pin current max 90 $\mu$ A over temperature
- ◆ Adjustable output voltage
- ◆ Line regulation typically 0.015%
- ◆ Load regulation typically 0.1%
- ◆ TO-252 package

**BLOCK DIAGRAM**

**ORDERING INFORMATION**

Package Type	Operating Temperature Range (T <sub>A</sub> )	Output Voltage
TO-252		
CM1085KCN252	0°C ~ +70°C	2.5V
CM1085SCN252	0°C ~ +70°C	3.3V
CM1085CN252	0°C ~ +70°C	ADJ.

**ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Maximum	Units
Input Supply Voltage	V <sub>IN</sub>	7	V
Power Dissipation	P <sub>D</sub>	Internally Limited.	W
Thermal Resistance Junction to Case TO-263	θ <sub>JC</sub>	2.5	°C/W
Thermal Resistance Junction to Ambient TO-252	θ <sub>JA</sub>	80	°C/W
Operating Junction Temperature Range	T <sub>J</sub>	0 to 125	°C
Storage Temperature Range	T <sub>STG</sub>	-65 to 150	°C
Lead Temperature ( Soldering ) 10 Sec	T <sub>LEAD</sub>	260	°C

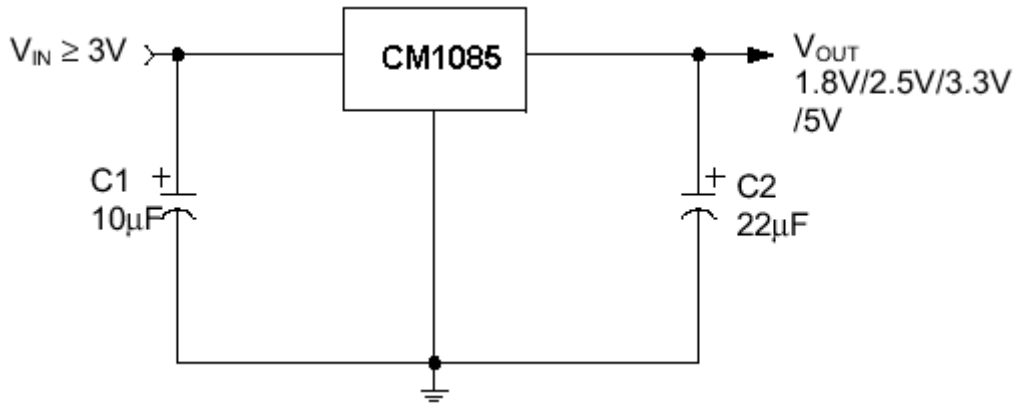
**ELECTRICAL CHARACTERISTICS**

Unless otherwise specified, Adj  $V_{IN} = 3.8V$  to  $7.0V$  and Adj  $I_o = 10mA$  to  $3.0A$ , Fixed mode  $V_{IN} = 4.75V$  to  $7.0V$  and Adj  $I_o = 10mA$  to  $3.0A$

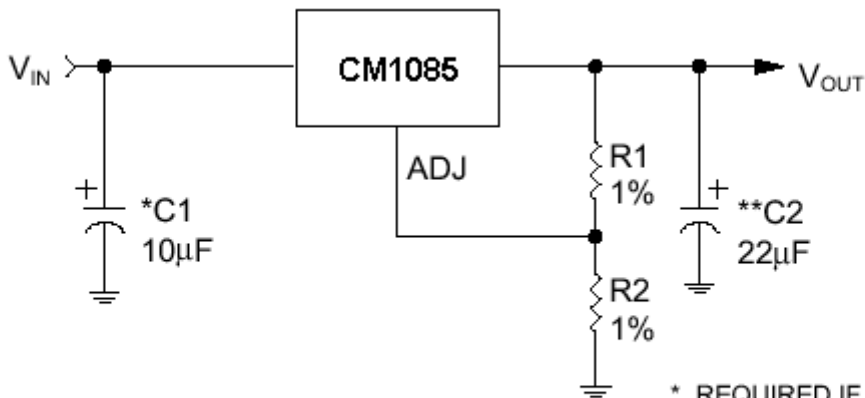
Parameter	Symbol	Test Conditions			Test Limits			Units
		$V_{IN}$	$I_o$	$T_j$	Min	Typ	Max	
Output Voltage <sup>(1)</sup>	$V_o$	5V	0mA	25°C	0.99  $V_{ol}$	$V_o$	1.01  $V_{ol}$	V
Fixed Voltage			3A	125°C	0.98  $V_{ol}$	$V_o$	1.02  $V_{ol}$	
Reference Voltage <sup>(1)</sup>	$V_{REF}$	5V	10mA	25°C	1.238	1.250	1.262	V
Adj Voltage Version			3A	125°C	1.225	1.250	1.275	
Line Regulation <sup>(1)</sup>	REG (LINE)		10mA	25°C		0.015	0.2	%
Load Regulation <sup>(1)</sup>	REG (LOAD)	5V		25°C		0.1	0.3	%
Dropout Voltage <sup>(2)</sup>	$V_D$			25°C		1		V
CM1085				125°C		1.1	1.3	
Current Limit	$I_{CL}$			125°C	5.0	7.5		A
Quiescent Current (fixed voltage)	$I_o$	5V				12	14	mA
Temperature Coefficient	$T_C$					0.005		%/°C
Adjust Pin Current	$I_{ADJ}$			25°C		55	120	μA
Adjust Pin Current Change	$\Delta I_{ADJ}$					0.2	5	μA
Temperature Stability	$T_S$	5V	0.5A			0.5		%
Minimum Load Current Adj Voltage Version	$I_o$	5V				5	14	mA
RMS Output Noise <sup>(3)</sup>	$V_N$			25°C		0.003		% $V_o$
Ripple Rejection Ratio <sup>(4)</sup>	$R_A$	5V	5.0A	125°C	60	72		dB

**NOTES :**

- (1) Low duty cycle pulse testing with Kelvin connections required.
- (2)  $\Delta V_{OUT}$  ,  $\Delta V_{REF} = 1\%$
- (3) Bandwidth of 10 Hz to 10 kHz.
- (4) 120 Hz input ripple (  $C_{ADJ}$  for ADJ=25 μ F )

**APPLICATION CIRCUIT**


Fixed Output Voltage Regulator

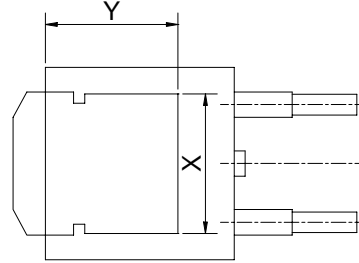
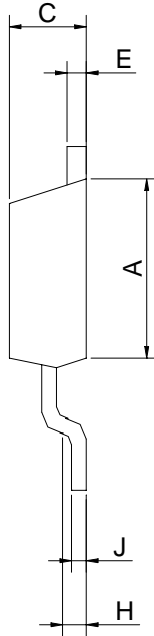
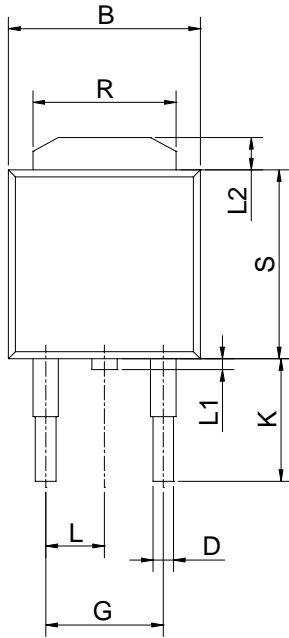


$$V_{OUT} = V_{REF} (1 + (R2/R1)) + I_{ADJ}R2$$

\* REQUIRED IF REGULATOR IS LOCATED FAR FROM POWER SUPPLY FILTER

\*\* DESIGN C2 AS CLOSE TO V<sub>OUT</sub> PIN AS POSSIBLE

Adjustable Regulator

**PACKAGE DIMENSION**
**TO-252 (N252)**


SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHS		
	MIN	NOM	MAX	MIN	NOM	MAX
A	5.97	---	6.35	0.235	---	0.250
B	6.35	---	6.73	0.250	---	0.265
C	2.19	---	2.38	0.086	---	0.094
D	0.69	---	0.88	0.027	---	0.035
E	0.46	---	0.58	0.018	---	0.023
G	4.58BSC			0.180BSC		
H	0.87	---	1.01	0.034	---	0.040
J	0.46	---	0.58	0.018	---	0.023
K	2.60	---	2.89	0.102	---	0.114
L	2.29BSC			0.090BSC		
R	4.45	---	5.46	0.175	---	0.215
S	5.33	---	5.59	0.210	---	0.220
L1	0.64	---	1.02	0.025	---	0.040
L2	1.52	---	2.03	0.060	---	0.080
X	4.12	---	4.56	0.162	---	0.179
Y	5.11	---	5.72	0.201	---	0.225

### **IMPORTANT NOTICE**

Champion Microelectronic Corporation (CMC) reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

A few applications using integrated circuit products may involve potential risks of death, personal injury, or severe property or environmental damage. CMC integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of CMC products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

---

#### **HsinChu Headquarter**

5F, No. 11, Park Avenue II,  
Science-Based Industrial Park,  
HsinChu City, Taiwan  
TEL: +886-3-567 9979  
FAX: +886-3-567 9909

#### **Sales & Marketing**

11F, No. 306-3, SEC. 1, Ta Tung Road,  
Hsichih, Taipei Hsien 221, Taiwan  
TEL: +886-2-8692 1591  
FAX: +886-2-8692 1596

---