



Features

- Four, six and eight channels of EMI filtering with integrated ESD protection
- $\pm 15\text{kV}$ ESD protection on each channel (IEC 61000-4-2 Level 4, contact discharge)
- $\pm 30\text{kV}$ ESD protection on each channel (HBM)
- Greater than 30dB attenuation (typical) at 1 GHz
- Chip Scale Package (CSP) with 0.40mm pitch and 0.25mm CSP solder ball which features extremely low parasitic inductance for optimum filter and ESD performance
- *OptiGuard*[™] Coating for improved reliability at assembly
- RoHS-compliant, lead-free finishing

Applications


- LCD and Camera data lines in mobile handsets
- I/O port protection for mobile handsets, notebook computers, PDAs etc.
- EMI filtering for data ports in cell phones, PDAs or notebook computers.
- Wireless handsets
- Handheld PCs/PDAs
- LCD and camera modules

Product Description

The CM1452 family of pi-style EMI filter arrays with ESD protection, integrates four, six and eight filters (C-L-C) in CSP form factor with 0.40mm pitch. Each EMI filter channel of the CM1452 is implemented as a 3-pole L-C filter where the component values are 20pF-17nH-20pF. The CM1452 roll-off frequency at -6dB attenuation is 330MHz and can be used in applications where the data rates are as high as 132Mbps and provide greater than 30dB over the 800MHz to 2.7GHz frequency range. The ESD diodes on every I/O pin provide a very high level of ESD protection for sensitive electronic components. The ESD protection diodes connected to the filter ports are designed and characterized to safely dissipate ESD strikes of $\pm 15\text{kV}$, beyond the maximum requirement of the IEC61000-4-2 international standard. Using the MIL-STD-883 (Method 3015) specification for Human Body Model (HBM) ESD, the pins are protected for contact discharges at greater than $\pm 30\text{kV}$.

The CM1452 incorporates *OptiGuard*[™] which results in improved reliability at assembly. The CM1452 is manufactured with a 0.40mm pitch and 0.25mm CSP solder ball to provide up to 28% board space savings vs. competing CSP devices with 0.50mm pitch and 0.30mm CSP solder ball.


Electrical Schematic

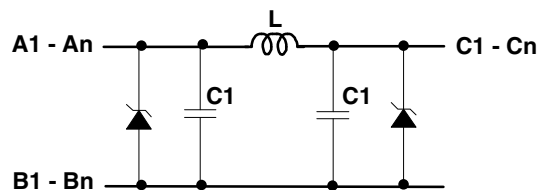

CM1452 schematic diagram of 3-pole L-C filter array with ESD.


PACKAGE / PINOUT DIAGRAMS

TOP VIEW
(Bumps Down View)




CM1452-04CP
10-bump CSP

BOTTOM VIEW
(Bumps Up View)



TOP VIEW
(Bumps Down View)

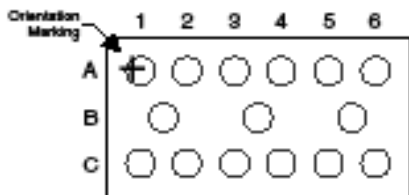


CM1452-06CP
15-bump CSP

BOTTOM VIEW
(Bumps Up View)



TOP VIEW
(Bumps Down View)

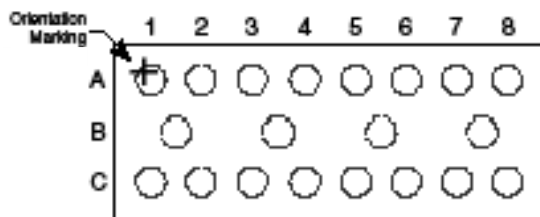

CM1452-08CP
20-bump CSP

BOTTOM VIEW
(Bumps Up View)



Notes:

1) These drawings are not to scale.

Pin Descriptions

| PIN DESCRIPTIONS | | | | | | | |
|------------------|-----|-----|-----------------|------------|-----|-----|-----------------|
| PIN NUMBER | | | PIN DESCRIPTION | PIN NUMBER | | | PIN DESCRIPTION |
| -04 | -06 | -08 | | -04 | -06 | -08 | |
| A1 | A1 | A1 | Filter #1 | C1 | C1 | C1 | Filter #1 |
| A2 | A2 | A2 | Filter #2 | C2 | C2 | C2 | Filter #2 |
| A3 | A3 | A3 | Filter #3 | C3 | C3 | C3 | Filter #3 |
| A4 | A4 | A4 | Filter #4 | C4 | C4 | C4 | Filter #4 |
| | A5 | A5 | Filter #5 | | C5 | C5 | Filter #5 |
| | A6 | A6 | Filter #6 | | C6 | C6 | Filter #6 |
| | | A7 | Filter #7 | | | C7 | Filter #7 |
| | | A8 | Filter #8 | | | C8 | Filter #8 |
| B1 | B1 | B1 | GND | | | | |
| B2 | B2 | B2 | GND | | | | |
| | B3 | B3 | GND | | | | |
| | | B4 | GND | | | | |

Ordering Information

| PART NUMBERING INFORMATION | | | | |
|----------------------------|-------|---------|-----------------------------------|--------------|
| # of Channels | Leads | Package | Lead-free Finish | |
| | | | Ordering Part Number ¹ | Part Marking |
| 4 | 10 | CSP | CM1452-04CP | 52 |
| 6 | 15 | CSP | CM1452-06CP | L526 |
| 8 | 20 | CSP | CM1452-08CP | L528 |

Note 1: Parts are shipped in Tape and Reel form unless otherwise specified.

Specifications

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | RATING | UNITS |
|-----------------------------|-------------|-------|
| Operating Temperature Range | -40 to +85 | °C |
| Storage Temperature Range | -65 to +150 | °C |

STANDARD OPERATING CONDITIONS

| PARAMETER | RATING | UNITS |
|-----------------------------|------------|-------|
| Operating Temperature Range | -40 to +85 | °C |

ELECTRICAL OPERATING CHARACTERISTICS (SEE NOTE 1)

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-------------------|--|---|----------------------|-------------|-------------|----------------------|
| L_{CHAN} | Channel Inductance | | | 17 | | nH |
| C_{TOT} | Total Channel Capacitance at 2.5Vdc; 1MHz, 30mVac | 2.5V dc; 1MHz, 30mV ac | 24 | 30 | 36 | pF |
| C_1 | Capacitance C1 at 2.5V dc; 1MHz, 30mV ac | 2.5V dc; 1MHz, 30mV ac | | 15 | | pF |
| f_c | Cut-off Frequency, ZSOURCE = 50 Ω , ZLOAD = 50 Ω | | | 148 | | MHz |
| f_r | Roll-off Frequency at -6dB Attenuation, ZSOURCE = 50 Ω , ZLOAD = 50 Ω | | | 330 | | MHz |
| V_{ST} | Stand-off Voltage, I = 10mA | | 5.5 | | | V |
| I_{LEAK} | Diode Leakage at 3.3V reverse bias voltage | | | 0.1 | 1.0 | μ A |
| V_{SIG} | Signal Clamp Voltage: Positive Clamp Negative Clamp | $I_{\text{LOAD}} = 10\text{mA}$ $I_{\text{LOAD}} = -10\text{mA}$ | 5.6 -1.5 | 6.8 -0.8 | 9.0 -0.4 | V V |
| V_{ESD} | In-system ESD withstand voltage*: a) Human Body Model, MIL-STD-883, Method 3015 b) Contact Discharge per IEC 61000-4-2 Level 4 | Notes 2 and 3 | ± 30 ± 15 | | | kV kV |
| R_{DYN} | Dynamic Resistance Channel Positive Transients Channel Negative Transients | | | 2.3 0.9 | | Ω Ω |
| A_L | Current per Inductor: | | | | 30 | mA |
| DC | DC Package Power Rating: | | | | 30 | W |

Note 1: All parameters specified at $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ unless otherwise noted.

Note 2: ESD applied to input/output pins with respect to GND, one at a time. Clamping voltage is measured at the opposite side of the EMI filter to the ESD pin (i.e. if ESD is applied to pin A1 then clamping voltage is measured at pin C1).

Note 3: Unused pins are left open.

Performance Information

Typical Filter Performance (nominal conditions unless specified otherwise, 50Ω environment)

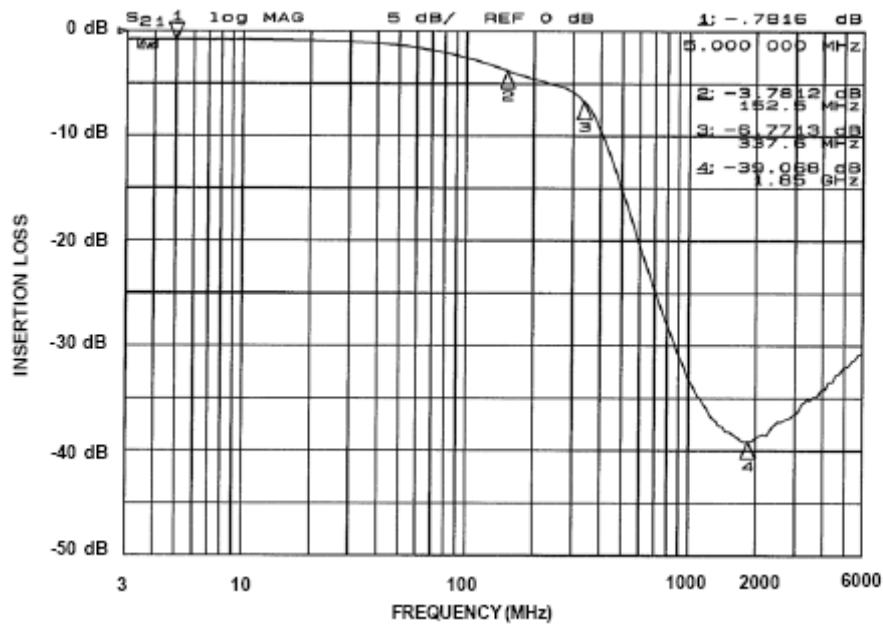


Figure 1. Insertional Loss vs. Frequency (Filter 1: CM1452-04, -06, -08)

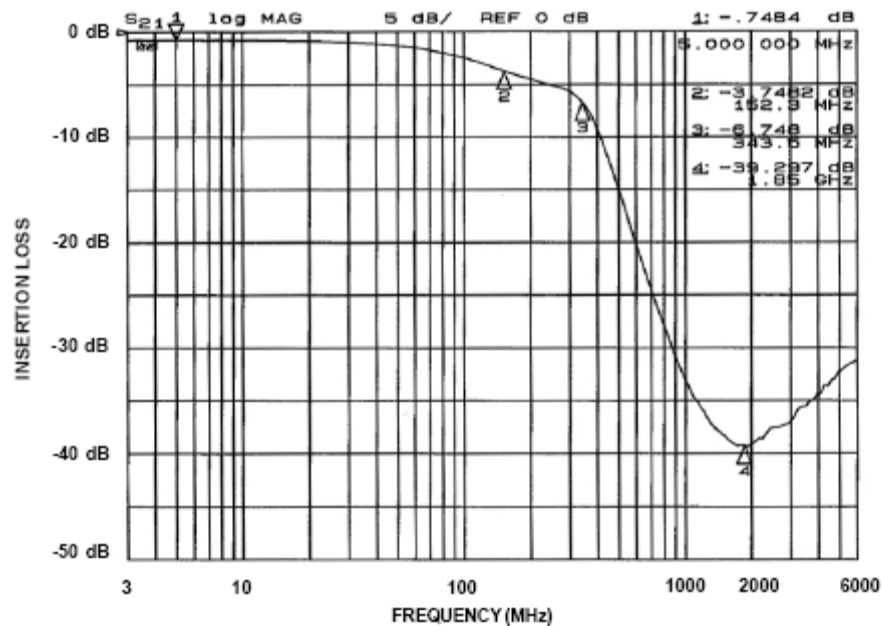


Figure 2. Insertional Loss vs. Frequency (Filter 2: CM1452-04, -06, -08)

Performance Information (Con'td)

Typical Filter Performance (nominal conditions unless specified otherwise, 50Ω environment)

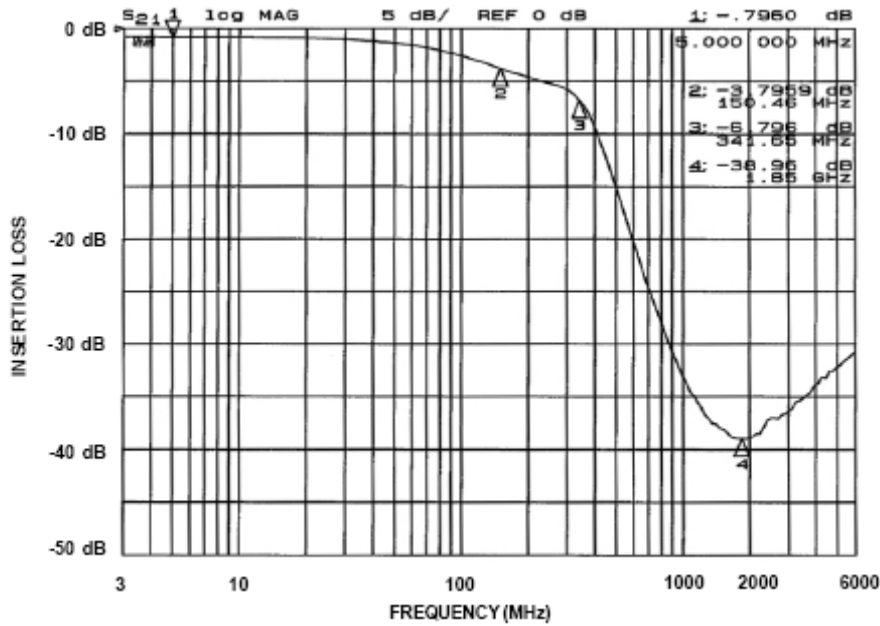


Figure 3. Insertional Loss vs. Frequency (Filter 3: CM1452-04, -06, -08)

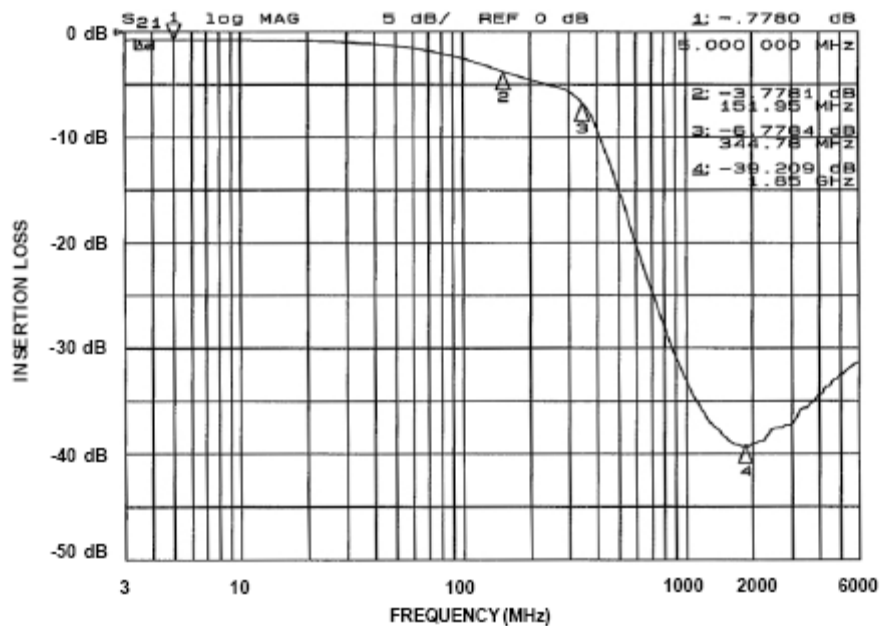


Figure 4. Insertional Loss vs. Frequency (Filter 4: CM1452-04, -06, -08)

Performance Information (Con'td)

Typical Filter Performance (nominal conditions unless specified otherwise, 50Ω environment)

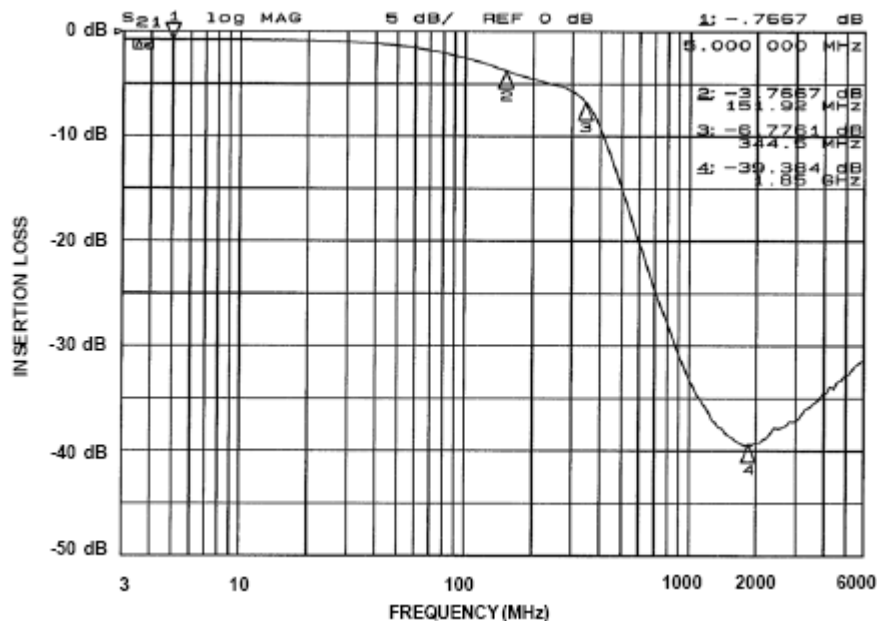


Figure 5. Insertional Loss vs. Frequency (Filter 5: CM1452-06, -08)

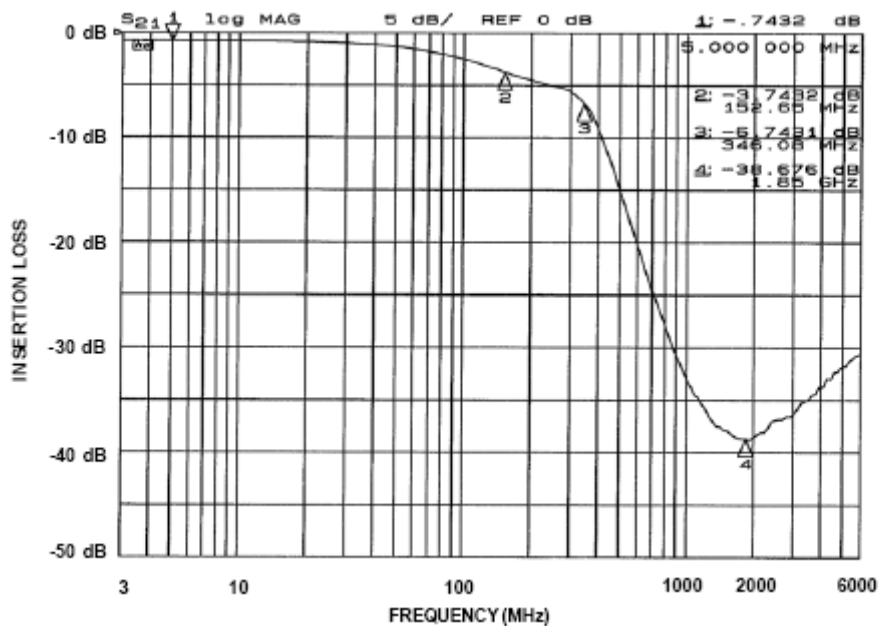


Figure 6. Insertional Loss vs. Frequency (Filter 6: CM1452-06, -08)

Performance Information (Con'td)

Typical Filter Performance (nominal conditions unless specified otherwise, 50Ω environment)

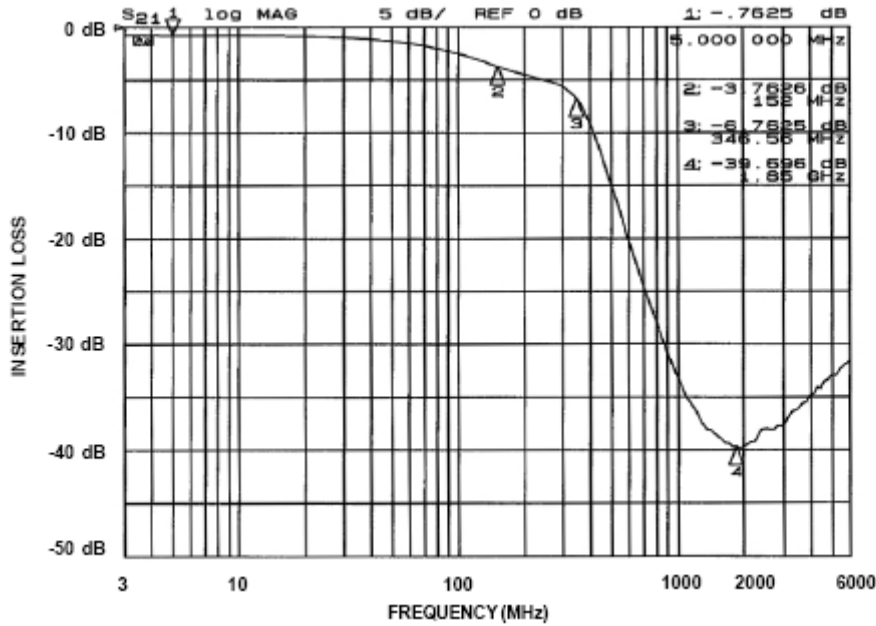


Figure 7. Insertional Loss vs. Frequency (Filter 7: CM1452-08)

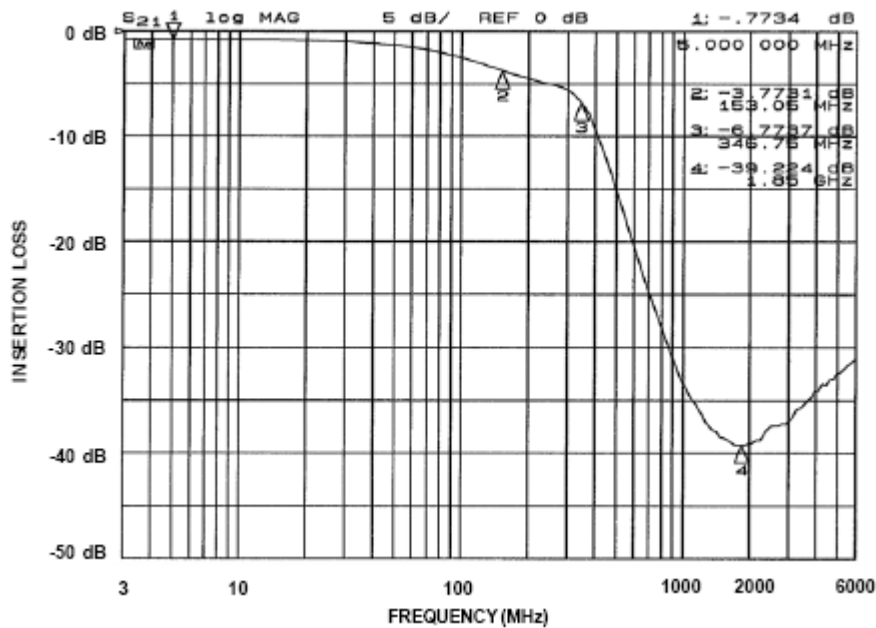


Figure 8. Insertional Loss vs. Frequency (Filter 8: CM1452-08)

Performance Information (Con'td)

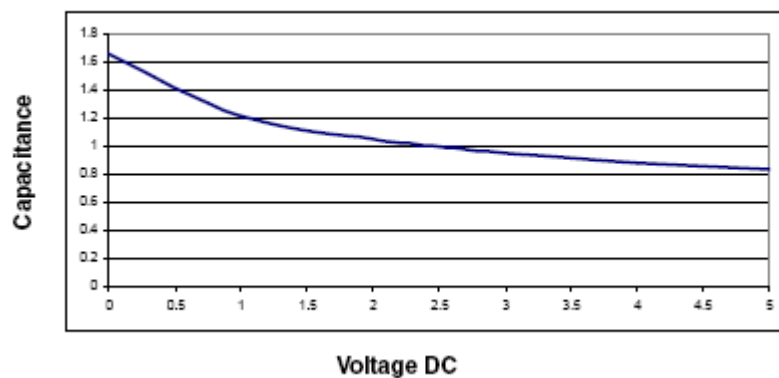


Figure 9. CM1452 Typical Diode Capacitance vs. Input Voltage (Normalized to 2.5Vdc)


Application Information

Refer to Application Note AP-217, "The Chip Scale Package", for a detailed description of Chip Scale Packages offered by California Micro Devices. See <http://www.wlcsforum.org/documents/pdf/ap-217.pdf> for download.

Mechanical Specifications

CM1452-04CP devices are packaged in custom Chip Scale Packages (CSP).


| PACKAGE DIMENSIONS | | | | | | |
|------------------------------------|-------------|-------|-------|--------|--------|--------|
| Package | Custom CSP | | | | | |
| Bumps | 10 | | | | | |
| Dim | Millimeters | | | Inches | | |
| | Min | Nom | Max | Min | Nom | Max |
| A1 | 1.627 | 1.672 | 1.717 | 0.0641 | 0.0658 | 0.0676 |
| A2 | 1.068 | 1.113 | 1.158 | 0.0420 | 0.0438 | 0.0456 |
| B1 | 0.395 | 0.400 | 0.405 | 0.0156 | 0.0157 | 0.0159 |
| B2 | 0.195 | 0.200 | 0.205 | 0.0077 | 0.0079 | 0.0081 |
| B3 | 0.342 | 0.347 | 0.352 | 0.0135 | 0.0137 | 0.0139 |
| B4 | 0.342 | 0.347 | 0.352 | 0.0135 | 0.0137 | 0.0139 |
| C1 | 0.186 | 0.236 | 0.286 | 0.0073 | 0.0093 | 0.0113 |
| C2 | 0.160 | 0.210 | 0.260 | 0.0063 | 0.0082 | 0.0102 |
| D1 | 0.545 | 0.615 | 0.685 | 0.0215 | 0.0242 | 0.0270 |
| D2 | 0.378 | 0.419 | 0.460 | 0.0149 | 0.0165 | 0.0181 |
| # per tape and reel | 3500 pieces | | | | | |
| Controlling dimension: millimeters | | | | | | |

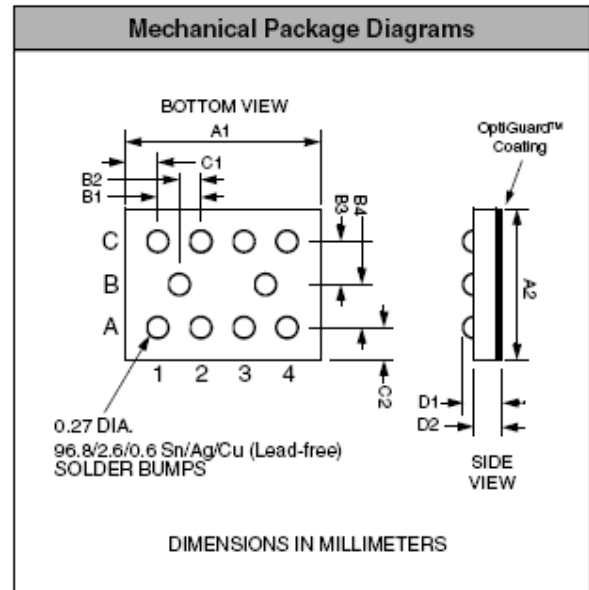

**Package Dimensions for
CM1452-04CP Chip Scale Package**

CSP Tape and Reel Specifications


| PART NUMBER | CHIP SIZE (mm) | POCKET SIZE (mm) $B_0 \times A_0 \times K_0$ | TAPE WIDTH W | REEL DIAMETER | QTY PER REEL | P_0 | P_1 |
|-------------|---------------------|---|-----------------|------------------|-----------------|-------|-------|
| CM1452-04CP | 1.67 X 1.11 X 0.615 | 1.73 X 1.23 X 0.83 | 8mm | 178mm (7") | 3500 | 4mm | 4mm |

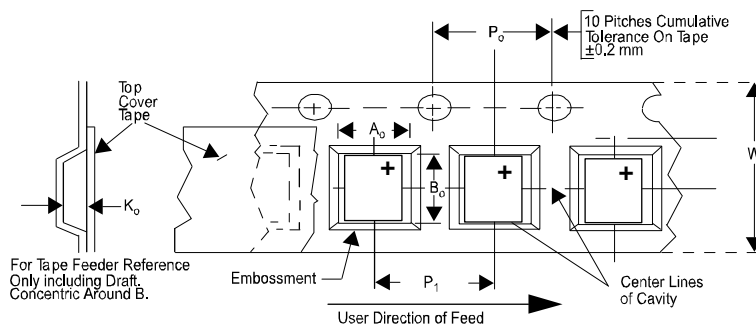

Mechanical Specifications

CM1452-06CP devices are packaged in custom Chip Scale Packages (CSP).


| PACKAGE DIMENSIONS | | | | | | |
|------------------------------------|-------------|-------|-------|--------|--------|--------|
| Package | Custom CSP | | | | | |
| Bumps | 15 | | | | | |
| Dim | Millimeters | | | Inches | | |
| | Min | Nom | Max | Min | Nom | Max |
| A1 | 2.427 | 2.472 | 2.517 | 0.0956 | 0.0973 | 0.0991 |
| A2 | 1.068 | 1.113 | 1.158 | 0.0420 | 0.0438 | 0.0456 |
| B1 | 0.395 | 0.400 | 0.405 | 0.0156 | 0.0157 | 0.0159 |
| B2 | 0.195 | 0.200 | 0.205 | 0.0077 | 0.0079 | 0.0081 |
| B3 | 0.342 | 0.347 | 0.352 | 0.0135 | 0.0137 | 0.0139 |
| B4 | 0.342 | 0.347 | 0.352 | 0.0135 | 0.0137 | 0.0139 |
| C1 | 0.186 | 0.236 | 0.286 | 0.0073 | 0.0093 | 0.0113 |
| C2 | 0.160 | 0.210 | 0.260 | 0.0063 | 0.0082 | 0.0102 |
| D1 | 0.545 | 0.615 | 0.685 | 0.0215 | 0.0242 | 0.0270 |
| D2 | 0.368 | 0.419 | 0.470 | 0.0145 | 0.0165 | 0.0185 |
| # per tape and reel | 3500 pieces | | | | | |
| Controlling dimension: millimeters | | | | | | |

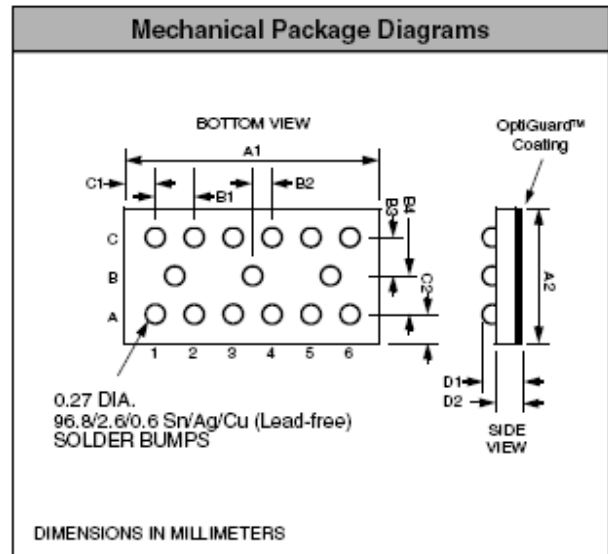

**Package Dimensions for
CM1452-06CP Chip Scale Package**

CSP Tape and Reel Specifications


| PART NUMBER | CHIP SIZE (mm) | POCKET SIZE (mm) $B_0 \times A_0 \times K_0$ | TAPE WIDTH W | REEL DIAMETER | QTY PER REEL | P_0 | P_1 |
|-------------|---------------------|---|-----------------|---------------|--------------|-------|-------|
| CM1452-06 | 2.47 X 1.11 X 0.615 | 2.59 X 1.27 X 0.73 | 8mm | 178mm (7") | 3500 | 4mm | 4mm |

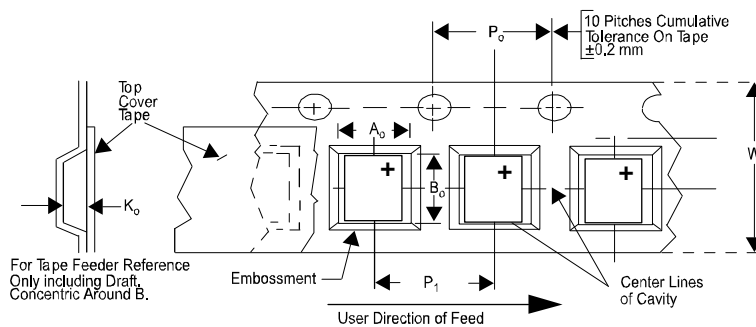

Mechanical Specifications

CM1452-08CP devices are packaged in custom Chip Scale Packages (CSP).


| PACKAGE DIMENSIONS | | | | | | |
|------------------------------------|-------------|-------|-------|--------|--------|--------|
| Package | Custom CSP | | | | | |
| Bumps | 20 | | | | | |
| Dim | Millimeters | | | Inches | | |
| | Min | Nom | Max | Min | Nom | Max |
| A1 | 3.227 | 3.272 | 3.317 | 0.1270 | 0.1288 | 0.1306 |
| A2 | 1.068 | 1.113 | 1.158 | 0.0420 | 0.0438 | 0.0456 |
| B1 | 0.395 | 0.400 | 0.405 | 0.0156 | 0.0157 | 0.0159 |
| B2 | 0.195 | 0.200 | 0.205 | 0.0077 | 0.0079 | 0.0081 |
| B3 | 0.342 | 0.347 | 0.352 | 0.0135 | 0.0137 | 0.0139 |
| B4 | 0.342 | 0.347 | 0.352 | 0.0135 | 0.0137 | 0.0139 |
| C1 | 0.186 | 0.236 | 0.286 | 0.0073 | 0.0093 | 0.0113 |
| C2 | 0.160 | 0.210 | 0.260 | 0.0063 | 0.0082 | 0.0102 |
| D1 | 0.545 | 0.615 | 0.685 | 0.0215 | 0.0242 | 0.0270 |
| D2 | 0.368 | 0.419 | 0.470 | 0.0145 | 0.0165 | 0.0185 |
| # per tape and reel | 3500 pieces | | | | | |
| Controlling dimension: millimeters | | | | | | |

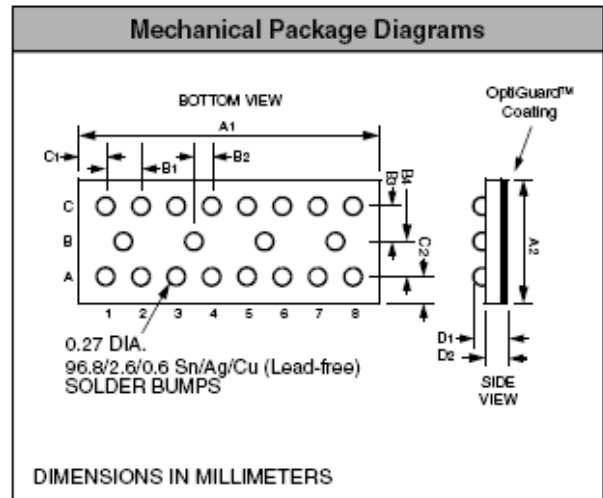


Package Dimensions for CM1452-08CP Chip Scale Package

CSP Tape and Reel Specifications

| PART NUMBER | CHIP SIZE (mm) | POCKET SIZE (mm) $B_0 \times A_0 \times K_0$ | TAPE WIDTH W | REEL DIAMETER | QTY PER REEL | P_0 | P_1 |
|-------------|---------------------|---|-----------------|------------------|-----------------|-------|-------|
| CM1452-08CP | 3.27 X 1.11 X 0.615 | 3.40 X 1.19 X 0.74 | 12mm | 330mm (13") | 3500 | 4mm | 4mm |

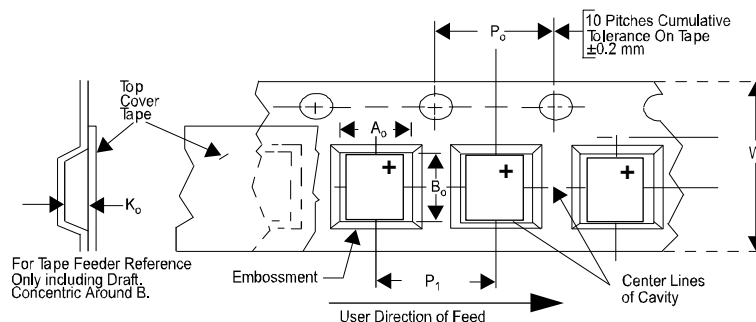

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855
Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative