


CM8V-T1A

Tuning Fork Crystal 32.768 kHz



100% leadfree, RoHS - compliant

DIMENSIONS

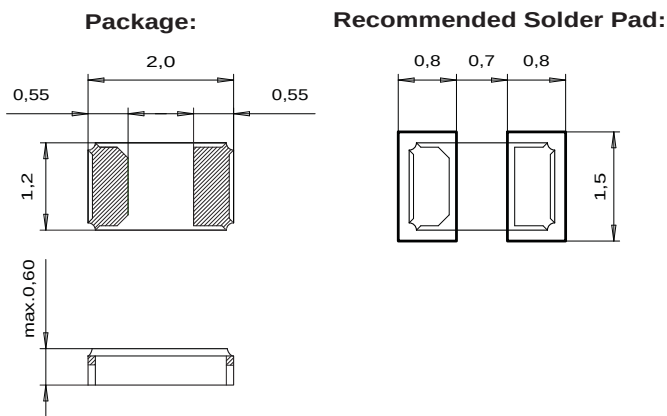

All dimensions in mm typical

Miniature SMT ceramic package
Ultra low profile: 0.60 mm height
Ind. and Ext. temperature ranges
Optimized electrical characteristics
"Low ESR and Low Sensitivity"
High stability
Low aging
Low power consumption
High shock and vibration resistance

DESCRIPTION:

This SMD ceramic package has been specially designed for miniature telecom and portable applications. The Ultra Miniature Quartz Crystal resonator in this product is achieved by a special manufacturing process. The optimized resonator design "low-ESR and low sensitivity" provide best-of-its-class electrical performance.

For pick-and-place equipment, the parts are available in 8 mm tape:

- 7" (178 mm) reel with 1'000 crystals
- 7" (178 mm) reel with 3'000 crystals
- 13" (330 mm) reel with 14'000 crystals

ELECTRICAL CHARACTERISTICS AT 25°C:

Nominal Frequency ¹⁾	F_L	32.768	kHz
Load capacitance ²⁾	C_L	4.0 / 6.0 / 7.0 / 9.0 / 12.5	pF
Frequency tolerance ³⁾	$\Delta F/F$	+/-20	ppm
	$\Delta F/F$	+/-100	ppm
Series resistance typ. / max.	R_s	55 / 75	k Ω
Motional capacitance typ.	C_1	3.7	fF
Static capacitance typ.	C_0	1.1	pF
Drive level max.	P	0.5	μ W
Insulation resistance min.	R_i	500	M Ω
Aging first year max.	$\Delta F/F$	+/-3	ppm
Turnover temperature	T_0	25 +/-5	°C
Frequency vs. temperature	$\Delta F/F_0$	$-0.035 \text{ ppm}/^\circ\text{C}^2 (T - T_0)^2 \pm 10\%$	ppm

- 1) Other frequencies on request.
- 2) Other load capacitances on request.
- 3) Tighter and wider frequency tolerances on request.

STANDARD FREQUENCIES:

Frequency kHz
32.768
Other frequencies on request

**ENVIRONMENTAL
CHARACTERISTICS:**

		Conditions	Max. Dev.
Storage temp. range		-55 to +125°C	
TA Operating temperature range		-40 to +85°C	
TB Extended oper. temp. range		-40 to +125°C	
Shock resistance	$\Delta F/F$	5000 g, 0.3 ms, 1/2 sine	+/-5 ppm
Vibration resistance	$\Delta F/F$	20 g / 10–2000 Hz	+/-5 ppm

**TERMINATIONS AND
PROCESSING:**

Type	Termination	Processing
CM8V-T1A	For SMD mounting Au plated pads	Reflow soldering 260°C / 20 s max.

**PRODUCT DESCRIPTION AND
ORDERING INFORMATION:**

CM8V-T1A	32.768kHz	12.5pF	+/-20ppm	TA	QC
<u>Frequency F₀</u>					
<u>C_L Load Capacitance</u>					
7.0 pF					
9.0 pF					
12.5 pF					
<u>Frequency tolerance</u>					
+/- 20 ppm					
+/- 100 ppm					
			<u>Temperature Range</u>		
			TA = -40 to 85°C (Standard)		
			TB = -40 to +125°C		
Optional: if not defined, 'Standard' will apply			<u>Qualification</u>		
			QC = Commercial (Standard)		
A unique part number will be generated for each product specification, i.e:					
20xxxx-MC01					1'000 pcs (in 8mm tape on 7" reel)
20xxxx-MC03					3'000 pcs (in 8mm tape on 7" reel)
20xxxx-PC14					14'000 pcs (in 8mm tape on 13" reel)
Please contact us.					

All specifications subject to change without notice.



Micro Crystal AG
Mühlestrasse 14
CH-2540 Grenchen
Switzerland

Tel. +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com