


# Mechanical Buzzer (DC)




**CMEB2619**

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Fundamental Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CMEB2619F04BE	4 ~ 8	6	65	95 at 10cm	400±100	Continuous	-20 ~ +60	ABS	17
CMEB2619H04BE	8 ~ 16	12	55	95 at 10cm	400±100	Continuous	-20 ~ +60	ABS	17
CMEB2619I04BE	20 ~ 28	24	55	95 at 10cm	400±100	Continuous	-20 ~ +60	ABS	17

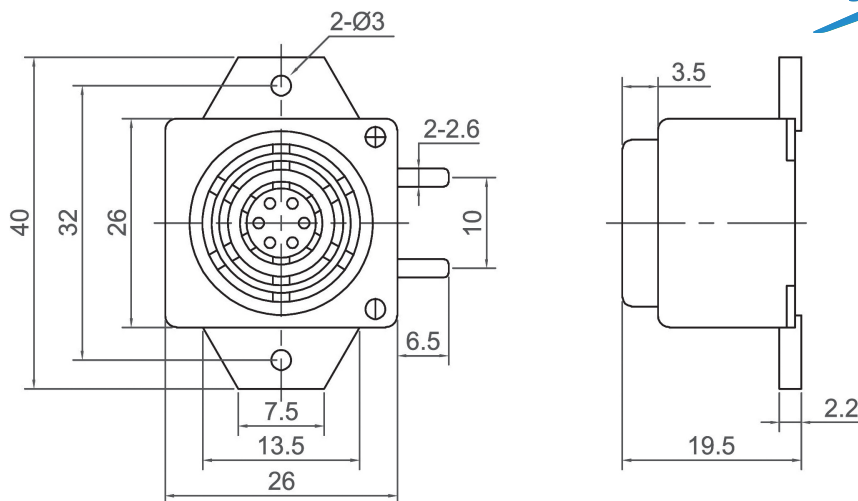

**CMEB2620**

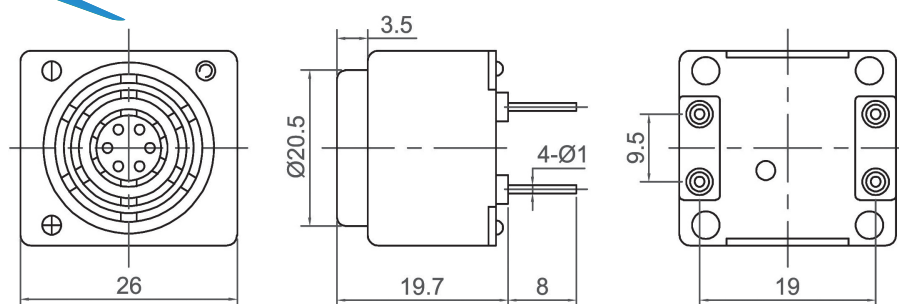

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Fundamental Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CMEB2620F04BP	4 ~ 8	6	35	95 at 10cm	400±100	Continuous	-20 ~ +60	ABS	17
CMEB2620H04BP	7 ~ 16	12	50	95 at 10cm	400±100	Continuous	-20 ~ +60	ABS	17
CMEB2620I04BP	20 ~ 28	24	55	95 at 10cm	400±100	Continuous	-20 ~ +60	ABS	17

**CANOPUS**

**Your Efficient Supplier**  
[www.canopus.com.hk](http://www.canopus.com.hk)

TEL.: (852) 2806 2812

Fax: (852) 2652 2216