

CMPTA13 CMPTA14 NPN
 CMPTA63 CMPTA64 PNP

**SURFACE MOUNT
 COMPLEMENTARY SILICON
 DARLINGTON TRANSISTORS**



SOT-23 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPTA13 and CMPTA63 series are complementary silicon darlington transistors manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for applications requiring extremely high gain.

MARKING CODES: CMPTA13: C1M
 CMPTA14: C1N
 CMPTA63: C2U
 CMPTA64: C2V

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

| | SYMBOL | | UNITS |
|--|----------------|-------------|--------------------|
| Collector-Base Voltage | V_{CBO} | 30 | V |
| Collector-Emitter Voltage | V_{CES} | 30 | V |
| Emitter-Base Voltage | V_{EBO} | 10 | V |
| Continuous Collector Current | I_C | 500 | mA |
| Power Dissipation | P_D | 350 | mW |
| Operating and Storage Junction Temperature | T_J, T_{stg} | -65 to +150 | $^\circ\text{C}$ |
| Thermal Resistance | θ_{JA} | 357 | $^\circ\text{C/W}$ |

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)


| SYMBOL | TEST CONDITIONS | MIN | MAX | UNITS |
|---------------|---|--------|-----|-------|
| I_{CBO} | $V_{CB}=30\text{V}$ | | 100 | nA |
| I_{EBO} | $V_{BE}=10\text{V}$ | | 100 | nA |
| BV_{CES} | $I_C=100\mu\text{A}$ | 30 | | V |
| $V_{CE(SAT)}$ | $I_C=100\text{mA}, I_B=0.1\text{mA}$ | | 1.5 | V |
| $V_{BE(ON)}$ | $V_{CE}=5.0\text{V}, I_C=100\text{mA}$ | | 2.0 | V |
| h_{FE} | $V_{CE}=5.0\text{V}, I_C=10\text{mA}$ (CMPTA13, CMPTA63) | 5,000 | | |
| h_{FE} | $V_{CE}=5.0\text{V}, I_C=10\text{mA}$ (CMPTA14, CMPTA64) | 10,000 | | |
| h_{FE} | $V_{CE}=5.0\text{V}, I_C=100\text{mA}$ (CMPTA13, CMPTA63) | 10,000 | | |
| h_{FE} | $V_{CE}=5.0\text{V}, I_C=100\text{mA}$ (CMPTA14, CMPTA64) | 20,000 | | |
| f_T | $V_{CE}=5.0\text{V}, I_C=10\text{mA}, f=100\text{MHz}$ | 125 | | MHz |

CMPTA13 CMPTA14 NPN
 CMPTA63 CMPTA64 PNP



**SURFACE MOUNT
 COMPLEMENTARY SILICON
 DARLINGTON TRANSISTORS**

SOT-23 CASE - MECHANICAL OUTLINE

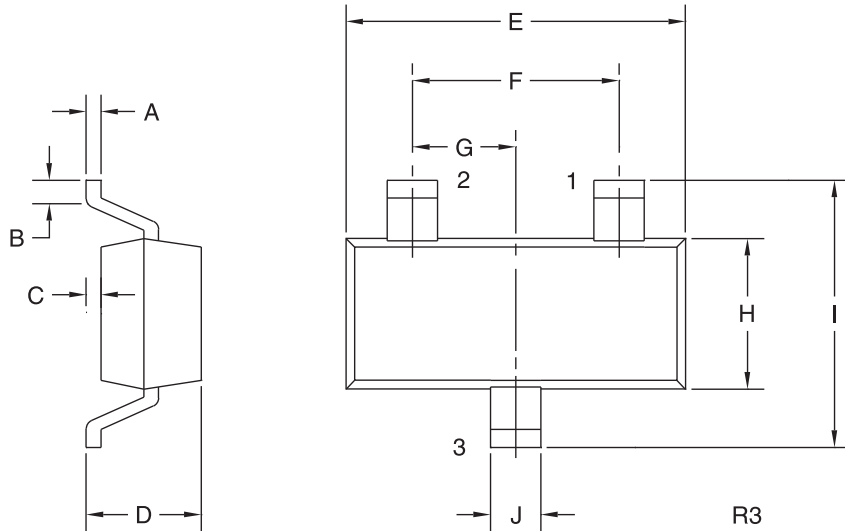

LEAD CODE:

- 1) Base
- 2) Emitter
- 3) Collector

MARKING CODES:

CMPTA13: C1M
 CMPTA14: C1N
 CMPTA63: C2U
 CMPTA64: C2V

| DIMENSIONS | | | | |
|------------|--------|-------|-------------|------|
| SYMBOL | INCHES | | MILLIMETERS | |
| | MIN | MAX | MIN | MAX |
| A | 0.003 | 0.007 | 0.08 | 0.18 |
| B | 0.006 | - | 0.15 | - |
| C | - | 0.005 | - | 0.13 |
| D | 0.035 | 0.043 | 0.89 | 1.09 |
| E | 0.110 | 0.120 | 2.80 | 3.05 |
| F | 0.075 | | 1.90 | |
| G | 0.037 | | 0.95 | |
| H | 0.047 | 0.055 | 1.19 | 1.40 |
| I | 0.083 | 0.098 | 2.10 | 2.49 |
| J | 0.014 | 0.020 | 0.35 | 0.50 |

SOT-23 (REV: R3)

R5 (1-February 2010)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms