


CMPTA96

SURFACE MOUNT
PNP SILICON
EXTREMELY HIGH VOLTAGE
TRANSISTOR



SOT-23 CASE

Central™

Semiconductor Corp.

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPTA96 type is a surface mount epoxy molded PNP silicon planar epitaxial transistors designed for extremely high voltage applications. **Marking Code is C96.**

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)


| | SYMBOL | | UNITS |
|--|----------------|-------------|---------------------------|
| Collector-Base Voltage | V_{CB0} | 450 | V |
| Collector-Emitter Voltage | V_{CEO} | 450 | V |
| Emitter-Base Voltage | V_{EBO} | 6.0 | V |
| Collector Current | I_C | 500 | mA |
| Power Dissipation | P_D | 350 | mW |
| Operating and Storage Junction Temperature | T_J, T_{stg} | -65 to +150 | $^\circ\text{C}$ |
| Thermal Resistance | θ_{JA} | 357 | $^\circ\text{C}/\text{W}$ |

ELECTRICAL CHARACTERISTICS:

| SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNITS |
|---------------|--|-----|------|------|-------|
| I_{CBO} | $V_{CB}=400\text{V}$ | | | 100 | nA |
| I_{EBO} | $V_{BE}=4.0\text{V}$ | | | 100 | nA |
| BV_{CBO} | $I_C=100\mu\text{A}$ | 450 | 500 | | V |
| BV_{CEO} | $I_C=1.0\text{mA}$ | 450 | 490 | | V |
| BV_{EBO} | $I_E=10\mu\text{A}$ | 6.0 | 9.7 | | V |
| $V_{CE(SAT)}$ | $I_C=1.0\text{mA}, I_B=0.1\text{mA}$ | | | 0.20 | V |
| $V_{CE(SAT)}$ | $I_C=10\text{mA}, I_B=1.0\text{mA}$ | | | 0.30 | V |
| $V_{CE(SAT)}$ | $I_C=50\text{mA}, I_B=5.0\text{mA}$ | | 0.15 | 0.50 | V |
| $V_{BE(SAT)}$ | $I_C=10\text{mA}, I_B=1.0\text{mA}$ | | | 1.0 | V |
| h_{FE} | $V_{CE}=10\text{V}, I_C=1.0\text{mA}$ | 40 | | | |
| h_{FE} | $V_{CE}=10\text{V}, I_C=10\text{mA}$ | 50 | 120 | 200 | |
| h_{FE} | $V_{CE}=10\text{V}, I_C=50\text{mA}$ | 45 | | | |
| h_{FE} | $V_{CE}=10\text{V}, I_C=100\text{mA}$ | 25 | 35 | | |
| f_T | $V_{CE}=10\text{V}, I_C=10\text{mA}, f=10\text{MHz}$ | 20 | | | MHz |
| C_{ob} | $V_{CB}=20\text{V}, I_E=0, f=1.0\text{MHz}$ | | | 7.0 | pF |
| C_{ib} | $V_{EB}=0.5\text{V}, I_C=0, f=1.0\text{MHz}$ | | | 130 | |

R1 (14-June2001)

SOT-23 CASE - MECHANICAL OUTLINE

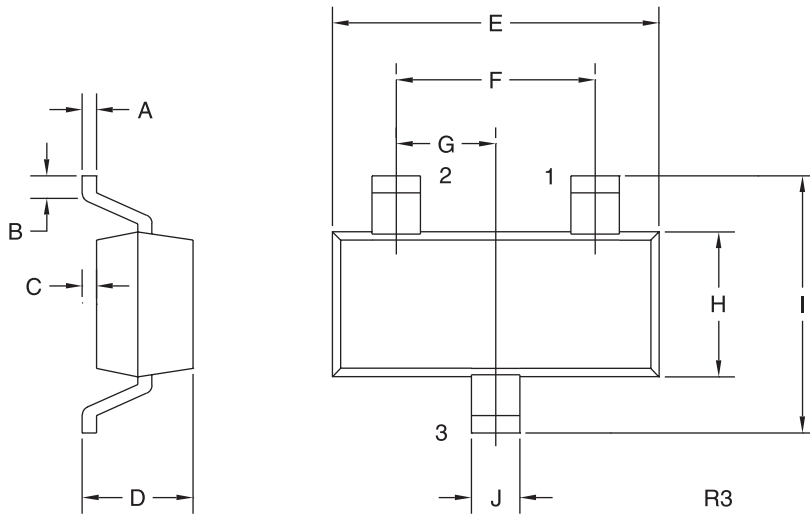

LEAD CODE:

- 1) BASE
- 2) EMITTER
- 3) COLLECTOR

MARKING CODE: C96

| DIMENSIONS | | | | |
|------------|--------|-------|-------------|------|
| SYMBOL | INCHES | | MILLIMETERS | |
| | MIN | MAX | MIN | MAX |
| A | 0.003 | 0.007 | 0.08 | 0.18 |
| B | 0.006 | - | 0.15 | - |
| C | - | 0.005 | - | 0.13 |
| D | 0.035 | 0.043 | 0.89 | 1.09 |
| E | 0.110 | 0.120 | 2.80 | 3.05 |
| F | 0.075 | | 1.90 | |
| G | 0.037 | | 0.95 | |
| H | 0.047 | 0.055 | 1.19 | 1.40 |
| I | 0.083 | 0.098 | 2.10 | 2.49 |
| J | 0.014 | 0.020 | 0.35 | 0.50 |

SOT-23 (REV: R3)