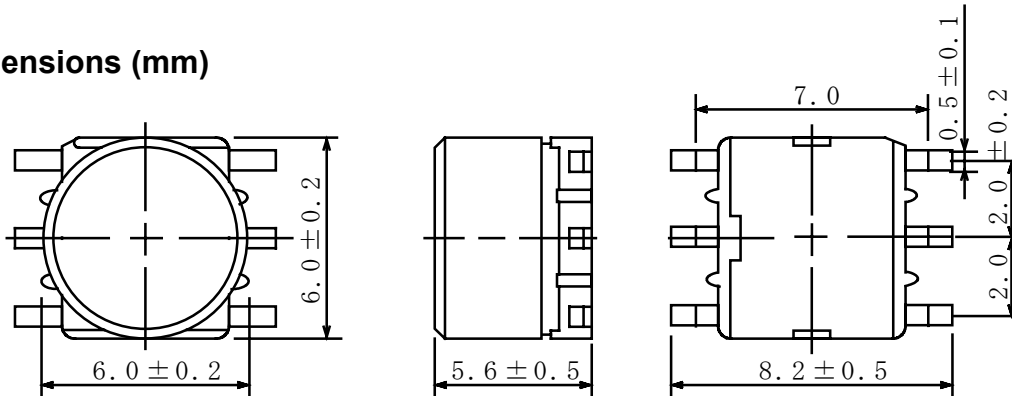



**Type: CMS65**
**◆ Product Description**


- 6.2×6.2mm Max.(L×W), 6.1mm Max. Height.
- Max. Operating frequency 500kHz;  
Max Operating Power 1.5W (500kHz), 0.91W(300kHz), 0.30W(100kHz)
- Custom design is available.


**◆ Feature**

- Magnetically shielded construction.
- Ideally used in Bias OSC for Tape Recorder, can be also used as power chokes, Hybrid-IC inductors.
- RoHS Compliance.

**◆ Dimensions (mm)**

**◆ Schematics (Bottom)**

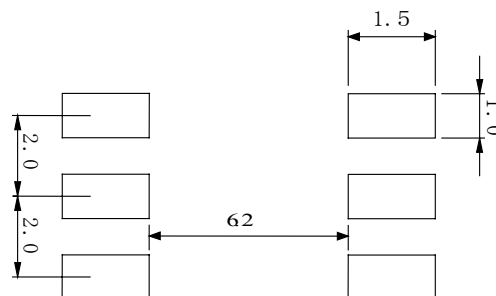
“ S ” is winding start.

**◆ Land Pattern (mm)**

**◆ Specification**

Sample No.	Inductance (3-4) 1kHz/1V	D.C.R. (3-4)
6324-T061	76 $\mu$ H $\pm$ 30%	0.59 $\Omega$ Max