



Magnetic Transducer (AC)

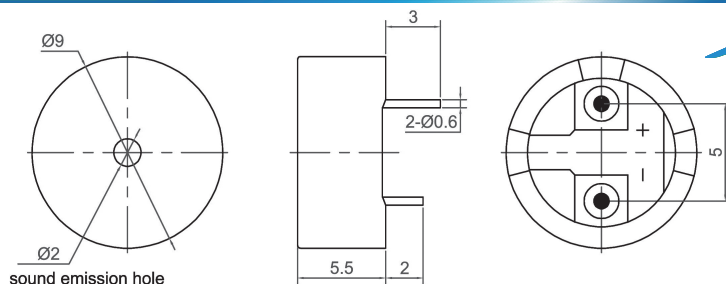


CMT0905



| Canopus Part no. | Operating Voltage (V) | Rated Voltage (V) | Max Rated Current (mA) | Coil Resistance (Ω) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Temperature ($^{\circ}$ C) | Housing | Weight (g) |
|------------------|-----------------------|-------------------|------------------------|------------------------------|------------------------|-------------------------|---------------------------------------|---------|------------|
| CMT0905A2731NP | 1 ~ 2 | 1.5 | 80 | 5.5 \pm 1 | 80 at 10cm | 2731 | -20 ~ +60 | Noryl | 1 |
| CMT0905A3100NP | 1 ~ 2 | 1.5 | 80 | 5.5 \pm 1 | 80 at 10cm | 3100 | -20 ~ +60 | Noryl | 1 |
| CMT0905E2731NP | 4 ~ 8 | 5 | 100 | 40 \pm 7.5 | 85 at 10cm | 2731 | -20 ~ +60 | Noryl | 1 |
| CMT0905E3100NP | 4 ~ 8 | 5 | 100 | 40 \pm 7.5 | 85 at 10cm | 3100 | -20 ~ +60 | Noryl | 1 |




CANOPUS

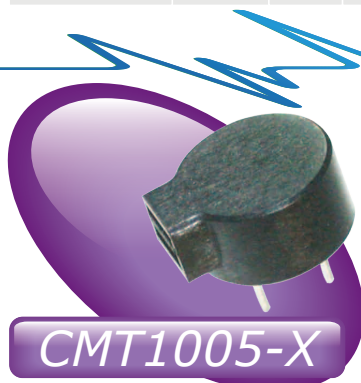

CMT1005-X

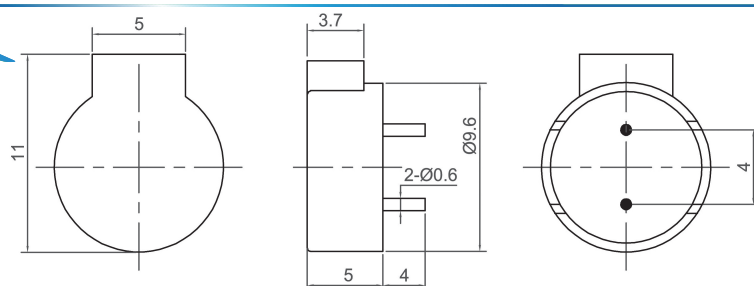


| Canopus Part no. | Operating Voltage (V) | Rated Voltage (V) | Max Rated Current (mA) | Coil Resistance (Ω) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Temperature ($^{\circ}$ C) | Housing | Weight (g) |
|------------------|-----------------------|-------------------|------------------------|------------------------------|------------------------|-------------------------|---------------------------------------|---------|------------|
| CMT1005A2731NPX | 1 ~ 2 | 1.5 | 80 | 5.5 \pm 1 | 80 at 10cm | 2731 | -20 ~ +60 | Noryl | 1 |
| CMT1005A3100NPX | 1 ~ 2 | 1.5 | 80 | 5.5 \pm 1 | 80 at 10cm | 3100 | -20 ~ +60 | Noryl | 1 |
| CMT1005E2731NPX | 4 ~ 8 | 5 | 100 | 40 \pm 7.5 | 85 at 10cm | 2731 | -20 ~ +60 | Noryl | 1 |
| CMT1005E3100NPX | 4 ~ 8 | 5 | 100 | 40 \pm 7.5 | 85 at 10cm | 3100 | -20 ~ +60 | Noryl | 1 |

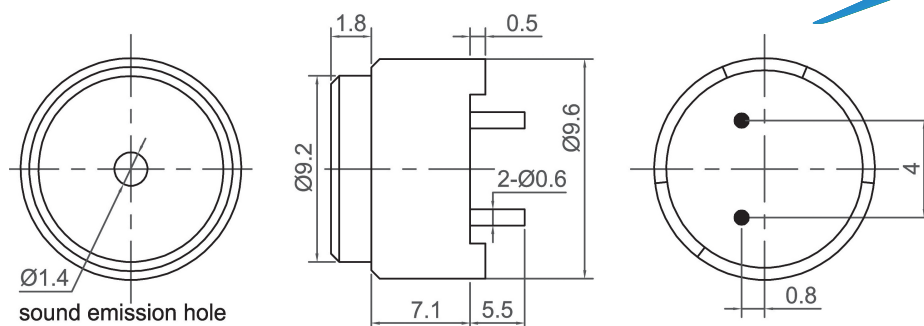

CMT1007

| Canopus Part no. | Operating Voltage (V) | Rated Voltage (V) | Max Rated Current (mA) | Coil Resistance (Ω) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Temperature ($^{\circ}$ C) | Housing | Weight (g) |
|------------------|-----------------------|-------------------|------------------------|------------------------------|------------------------|-------------------------|---------------------------------------|---------|------------|
| CMT1007A3100NP | 1 ~ 2 | 1.5 | 80 | 5.5 \pm 1 | 80 at 10cm | 3100 | -20 ~ +60 | Noryl | 2 |



Your Efficient Supplier
www.canopus.com.hk

TEL.: (852) 2806 2812

Fax: (852) 2652 2216