

General Description

The 75N04 uses innovative packaging technology to provide excellent RDS(ON). This device is suitable for use as a wide variety of applications.

Features

- N-channel Enhancement mode
- Low On-Resistance
- 100% Avalanche tested
- RoHS Compliant


Product Summary

BVDSS	RDSON	ID
40V	7.5mΩ	75A

Applications

- DC/DC converter
- Powertrain Management
- Solenoid and Motor Drivers

TO-252/251 Pin Configuration

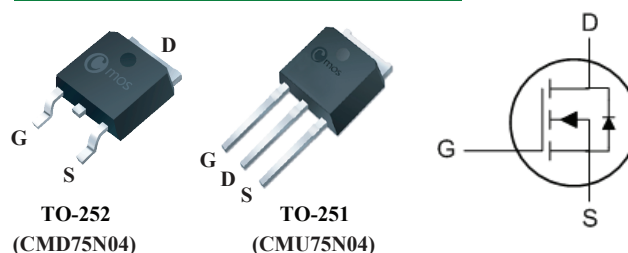

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	40	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D@T_C=25^\circ\text{C}$	Continuous Drain Current	75	A
$I_D@T_C=100^\circ\text{C}$	Continuous Drain Current	53	A
I_{DM}	Pulsed Drain Current	300	A
EAS	Single Pulse Avalanche Energy	200	mJ
$P_D@T_C=25^\circ\text{C}$	Total Power Dissipation	60	W
T_{STG}	Storage Temperature Range	-55 to 175	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 175	$^\circ\text{C}$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient	---	62	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance Junction -Case	---	2.6	$^\circ\text{C}/\text{W}$

Electrical Characteristics ($T_J=25^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=250\mu A$	40	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=10V$, $I_D=20A$	---	6.5	7.5	m Ω
		$V_{GS}=4.5V$, $I_D=20A$	---	8	11	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250\mu A$	1	---	3	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=40V$, $V_{GS}=0V$, $T_J=25^{\circ}\text{C}$	---	---	1	μA
		$V_{DS}=18V$, $V_{GS}=0V$, $T_J=85^{\circ}\text{C}$	---	---	20	
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=5V$, $I_D=20A$	---	30	---	S
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	2	---	Ω
Q_g	Total Gate Charge	$V_{DD}=32V$, $V_{GS}=0$ to $10V$, $I_D=75A$	---	25	33	nC
Q_{gs}	Gate-Source Charge		---	12	---	
Q_{gd}	Gate-Drain Charge		---	3.5	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=20V$, $V_{GS}=10V$, $R_G=3.5\Omega$ $I_D=75A$	---	7	---	ns
T_r	Rise Time		---	10	---	
$T_{d(off)}$	Turn-Off Delay Time		---	6	---	
T_f	Fall Time		---	8	---	
C_{iss}	Input Capacitance	$V_{DS}=25V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	2400	---	pF
C_{oss}	Output Capacitance		---	490	---	
C_{rss}	Reverse Transfer Capacitance		---	15	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_{SD}	Diode Forward Voltage	$V_{GS}=0V$, $I_F=20A$	---	---	1.2	V

Note :

1.The test condition is $V_{DD}=20V$, $V_{GS}=10V$, $L=0.5\text{mH}$, $I_{AS}=28A$

This product has been designed and qualified for the consumer market.

Cmos assumes no liability for customers' product design or applications.

Cmos reserves the right to improve product design, functions and reliability without notice.