


Piezo Buzzer (DC)




CPB3626-R


Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB3626JC29TG	5 ~ 32	30	60	90 at 61cm	2900 ± 500	Continuous	-20 ~ +60	PBT	35

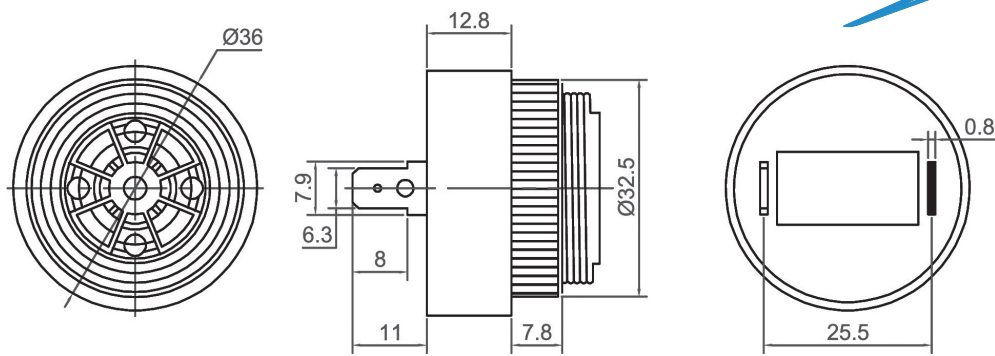

CPB3635

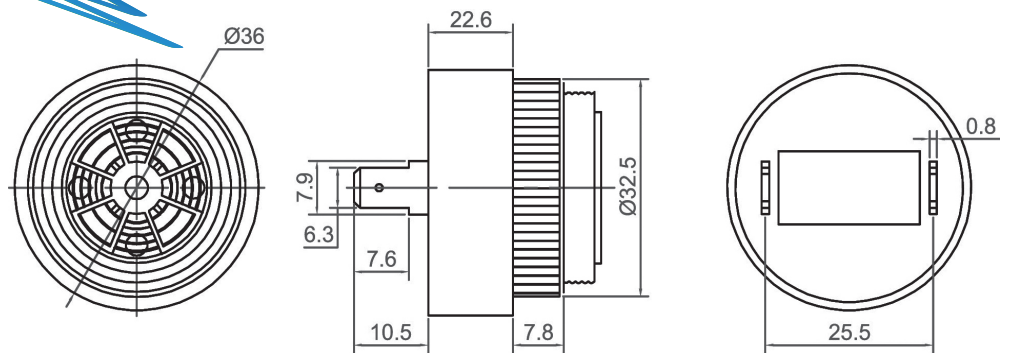

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB3635HM22TG	4 ~ 18	12	85	95 at 60cm	2200 ± 500	Siren	-20 ~ +70	PBT	35
CPB3635JM22TG	6 ~ 28	28	85	95 at 61cm	2200 ± 500	Siren	-20 ~ +70	PBT	35

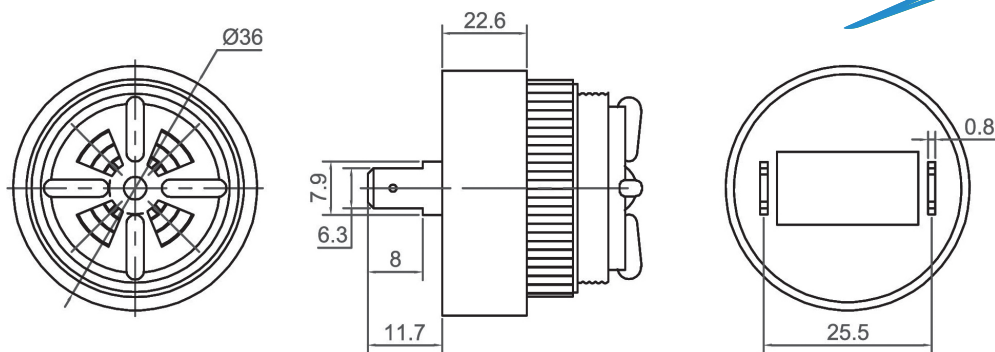

CPB3640

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB3640GM22TG	5 ~ 15	9	50	105 at 10cm	2200 ± 300	Siren	-20 ~ +60	PBT	35

Your Efficient Supplier
www.canopus.com.hk

TEL.: (852) 2806 2812

Fax: (852) 2652 2216

CANOPUS