

Features

- Frequency Range 5 – 1000 MHz
- Nominal Coupling 16 dB
- Low Cost and **RoHS** Compliant
- Industry Standard SMT package
- Available in Tape-and -Reel
- 75 Ohms Characteristic Impedance

Description


The CPK-1001-716H coupler is designed for applications that require small, low cost, and highly reliable surface mount components. Applications may be found in broadband, wireless and other communications systems. These units are built Lead-Free and RoHS compliant. S-Parameters are available on request.

Specifications


Parameter	Minimum	Typ	Maximum
Frequency Range (MHz)	5		1000
Coupling(dB)	15.5	16	16.5
Mainline Loss(dB)		0.7	1.2
Directivity(dB)	16	30	
Return Loss (dB)		25	17.7

Note: Typical values represent Mid-band performance @ 25°C.

Schematic

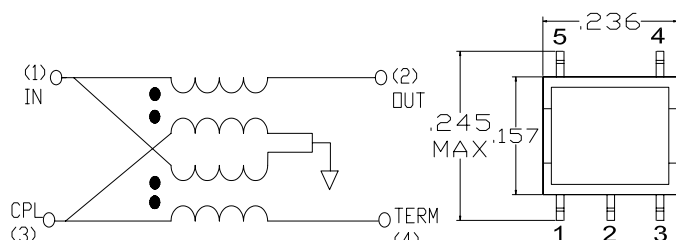


Package – S01

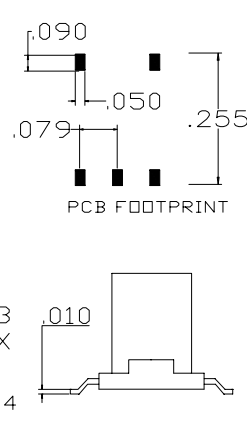


Pin Functions

Function	Pin
Input	4
Coupled	5
Output	3
Ground	2
Termination	1

Typical Test Data – Insertion Loss, Coupling, Directivity

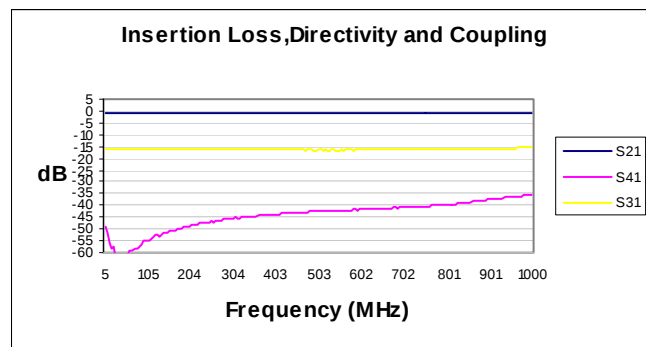

Typical Test Data – Return Loss

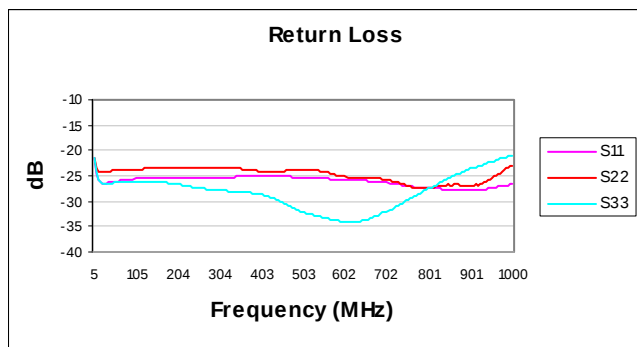

Specifications and information on this data sheet are subject to change without notice.