


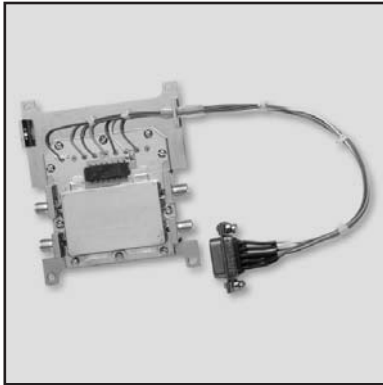

MODEL NUMBER CPS49093



Phase Shifter, 4 Section

FEATURES

- 1215-1400 MHz
- 22.5° LSB
- 337.5°
- +42 dBm 3rd Order Intercept

- TTL Driver
- SMA Connector


4 BIT

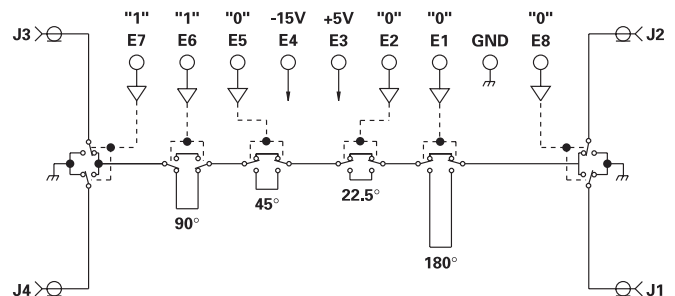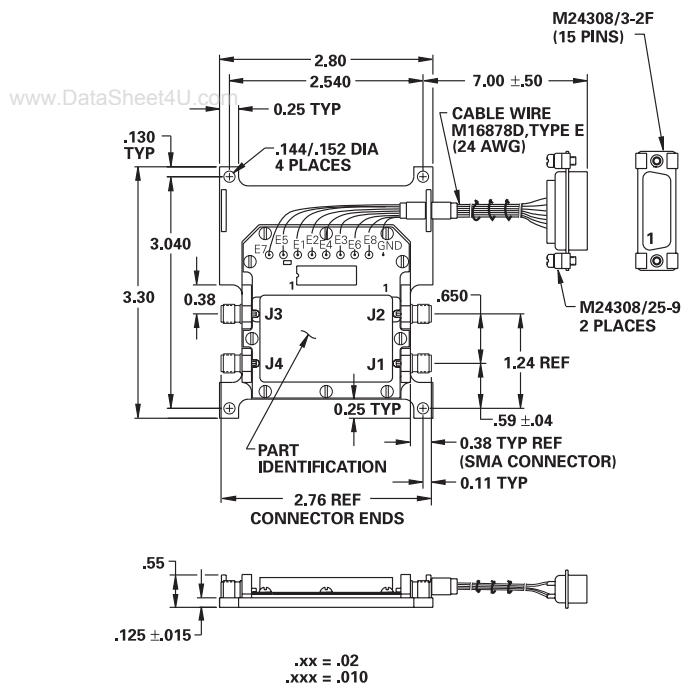

P1 PIN NO.	BD PIN NO.	FUNCTION
1	GND	GROUND
2	E3	+5V
3	E4	-15V
4	E1	180°
5	E6	90°
6	E5	45°
7	E2	22.5°
8	-	N/C
9	-	N/C
10	E8	J1/J2
11	E7	J3/J4
12	-	N/C
13	-	GND
14	-	GND
15	-	N/C

GUARANTEED PERFORMANCE

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	1215		1400	MHz	
DC Current		34 108	250 200	mA	At +5 VDC Supply At -15 VDC Supply
Control Type		TTL			6 Line Logic "0" = Refer Phase Logic "1" = Phase Shift
Control Current	High Low	.1 .1	±20 ±20	μA	VIH = +5.0V VIL = +0.8 V
Insertion Loss		1.75 1.25	2.4 3.25	dB	At 25° C At Temperature Extremes
Phase:	LSB Range Accuracy Linearity	22.5 337.5 1.5	±6 3.0	DEG DEG DEG	22.5, 45, 90, 180 At 1215 MHz
Isolation		40	60	dB	30 dBm Min With +5V Removed
VSWR		1.15/1	1.5/1		1215 - 1400 MHz
Impedance		50		OHMS	
Time Delay		.8	1.0	1.2	nSec
Switching Speed		.6	3.5		μSec
Transition (Rise/Fall) Time		.05			μSec
Switching (Video) Transients		36			mV
Intercept Points	2nd 3rd	+63 +42			dBm
RF Power	Operate No Damage	+36 +37	+34 +37		dBm
Operating Temperature		-54	+25	+80	°C

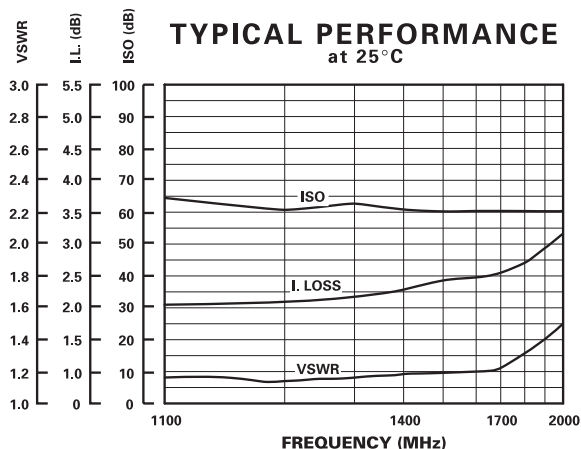

DAICO Industries

310.507.3242 • FAX 310.507.5701 • www.daico.com
www.DataSheet4U.com