





External Drive Piezo Transducer (AC)






CPT1708





| Canopus Part no. | Min sound Output (dBA) | Rated Voltage (V) | Max Input Voltage (V) | Resonant Frequency (Hz) | Capacitance (pF) | Operating Temperature (°C) | Housing | Weight (g) |
|------------------|------------------------|-------------------|-----------------------|-------------------------|-----------------------|----------------------------|---------|------------|
| CPT1708C40TP | 85 AT 10cm | 3 Vp-p | 30 Vrms | 4000 | 14000 ± 30% at 1000Hz | -20 ~ +60 | PBT | 2 |




CPT1709



| Canopus Part no. | Min sound Output (dBA) | Rated Voltage (V) | Max Input Voltage (V) | Resonant Frequency (Hz) | Capacitance (pF) | Operating Temperature (°C) | Housing | Weight (g) |
|------------------|------------------------|-------------------|-----------------------|-------------------------|-----------------------|----------------------------|---------|------------|
| CPT1709G20NP | 78 AT 10cm | 9 Vp-p | 25 Vrms | 2000 | 25000 ± 30% at 1000Hz | -20 ~ +60 | Noryl | 1 |

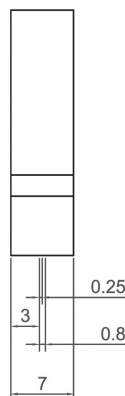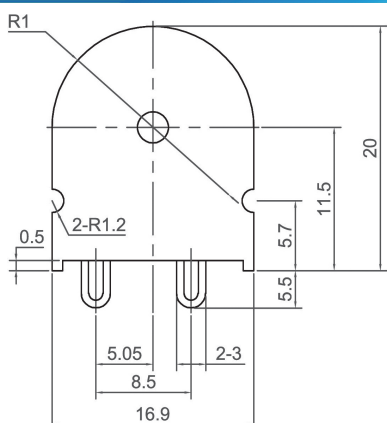

CPT2007



| Canopus Part no. | Min sound Output (dBA) | Rated Voltage (V) | Max Input Voltage (V) | Resonant Frequency (Hz) | Capacitance (pF) | Operating Temperature (°C) | Housing | Weight (g) |
|------------------|------------------------|-------------------|-----------------------|-------------------------|-----------------------|----------------------------|---------|------------|
| CPT2007G22TPA | 80 AT 10cm | 9 Vp-p | 30 Vrms | 2200 | 22000 ± 30% at 1000Hz | -30 ~ +80 | PBT | 2 |

Your Efficient Supplier
www.canopus.com.hk

TEL.: (852) 2806 2812

Fax: (852) 2652 2216

CANOPUS