


SPECIFICATION

Normal voltage(V)	3.0
Normal Capacity(mAh)	225
Continuous standard load (mA)	0.2
Operating temperature (°C)	-20 ~ +70
Weight(g)	3.1

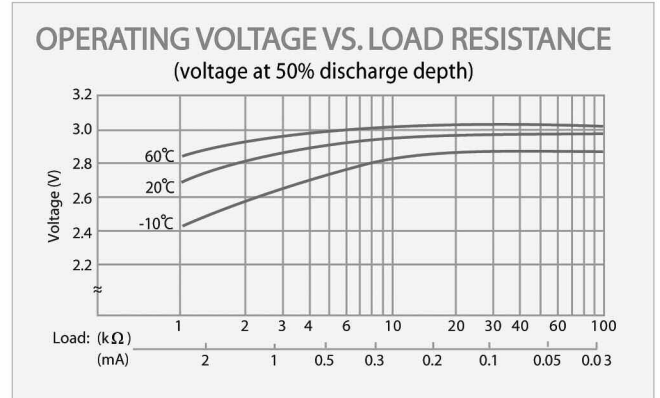

WARNING:

- Forbid short-circuit, charge between "+" and "-".
- Forbid over-discharge, fire, damage.
- Finish sealing less more 5 seconds at 200°C~250°C.
- Take out the battery when discharging to cut-off voltage, and embedding it under the ground or jump in the deep water.

