


Cell Type CR2477 Specifications

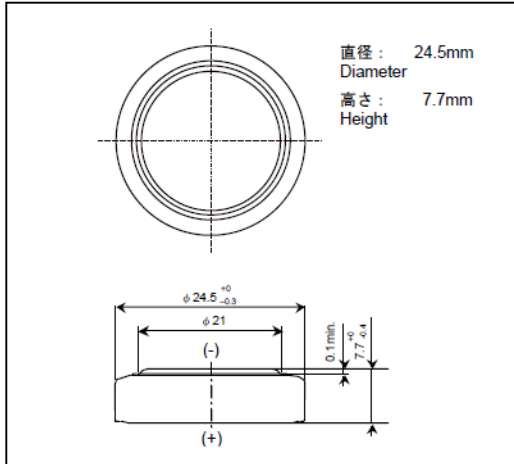


Nominal Voltage (V)	3
Nominal Capacity (mAh) *1	1000
Standard Discharge Current (mA)	0.4
Operating Temperature Range (°C) *2	-20 ~ +70
Weight (g)	10


*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23°C.

*2 Consult FDK when using batteries at temperatures exceeding the -20°C to +60°C range.


Discharge Characteristics on Load

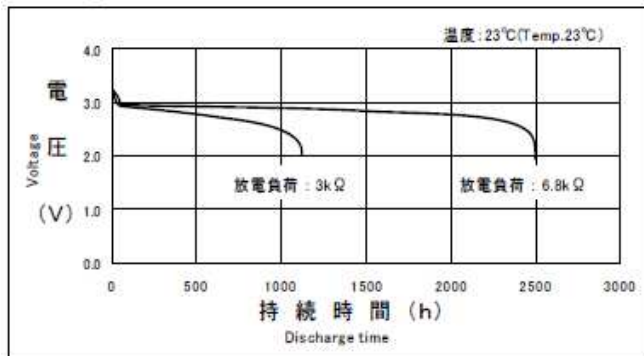


Discharge Characteristics on Temperature

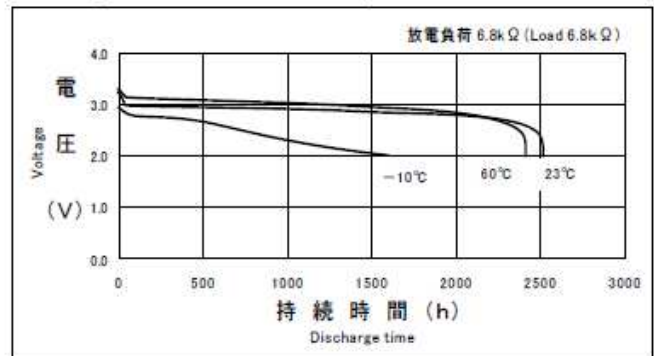

Discharge Load vs. Operation Voltage (Discharge depth 40%)

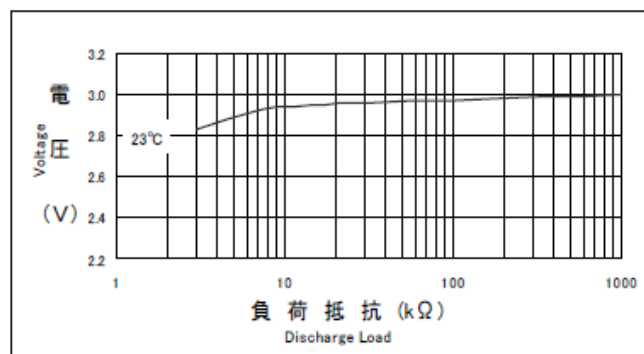

Discharge Load vs. Discharge Capacity

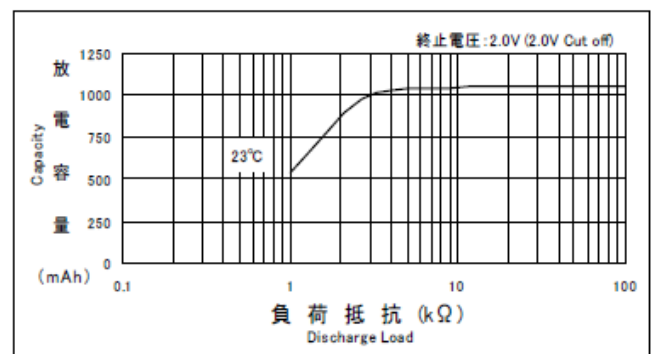

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.