


CR2477

In Production REACH

Appearance & Shape



Applications

Other Usage	<ul style="list-style-type: none"> •Automotive <ul style="list-style-type: none"> •Smart Key/Keyless entry •Door sill strip •IoT <ul style="list-style-type: none"> •Tracking devices •Sensors •Security •Medical <ul style="list-style-type: none"> •Thermometers •Others <ul style="list-style-type: none"> •Home electrical appliances/Multi- functional printer •Electronic price tags, POS systems
-------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Features

•Lightweight, High Voltage and High Energy Density :
The battery voltage is 3V, almost double that of normal alkaline or manganese batteries. This means that the number of batteries required for equipment can be halved for maximum space saving and weight reduction.

•Excellent Discharge Characteristics :
Voltage characteristics remain stable even for a long period of discharge, greatly improving the reliability of equipment that uses the battery. Such equipment is also maintenance-free (battery replacement is seldom required).

•Outstanding Temperature Characteristics :
Murata's original organic electrolyte provides superb characteristics over a wide range of temperature from low to high.
-30 to +70 degrees C(Standard type) -40 to +125 degrees C(Heat-resistant type)

•Excellent Leakage Resistance :
The newly developed battery construction and electrolyte ensure maximum leakage resistance over a long span of time.

•Excellent Long-Term Reliability :
Carefully selected active materials are used for the active material as well as for the electrolyte. These materials are sealed by Murata's innovative technology to minimize battery self-discharge. The annual self-discharge rate at room temperature and normal humidity is less than 1% of the nominal capacity.

•UL Approved Parts :
Sony's Coin Manganese Dioxide Lithium Batteries are approved by UL. (UL1642 File No. MH12566)

•RoHS directive •European Directives:
This product does not contain Mercury(Hg), Cadmium(Cd), nor Lead(Pb), and conforms to EC regulation values (Directive 2006/66/EC, 2013/56/EU).
Battery pack are excluded from RoHS directive (DIRECTIVE 2011/65/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment).

Attention
1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

CR2477

Specifications

Battery type	Coin Manganese Dioxide Lithium Batteries
Nominal Voltage	3.0V
Nominal Capacity	1000mAh
Standard Discharge Current	0.4mA
Operating Temperature Range	-30°C to 70°C
Diameter	24.5mm
Height	7.7mm
Mass	10.0g
IEC (JIS)	-

Attention


1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

CR2477


Product Data

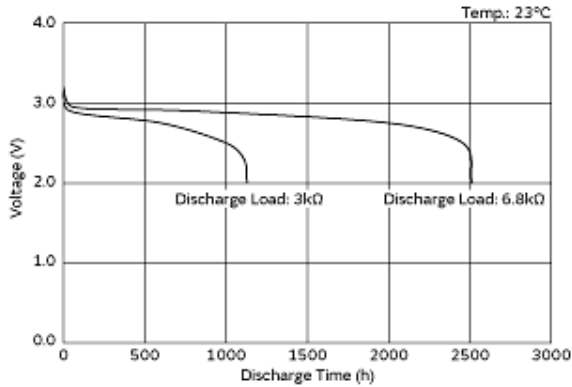


Discharge Characteristics on Load

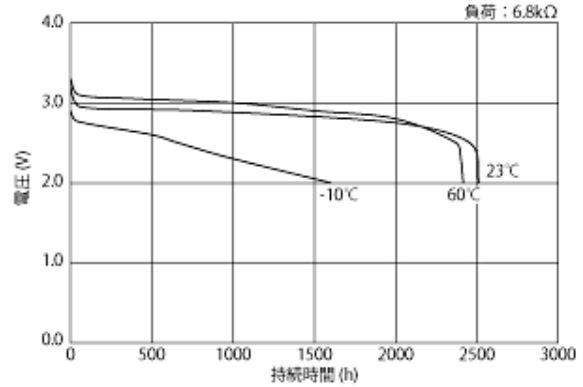

Discharge Characteristics on Temperature

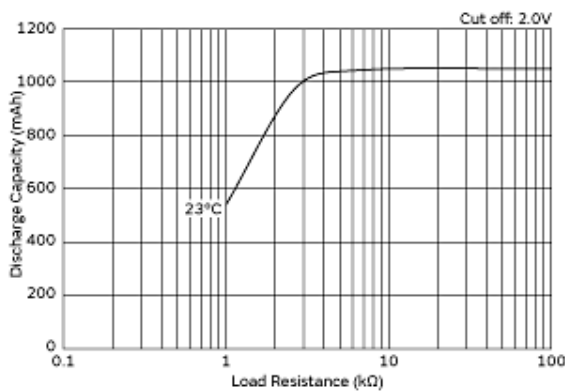

Discharge Load vs. Discharge Capacity

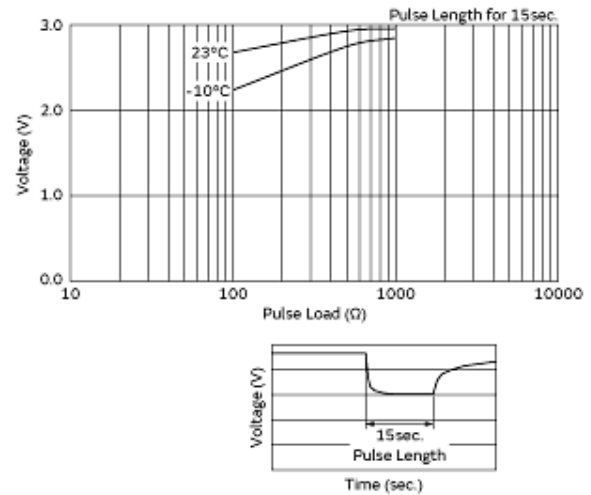

Discharge Characteristics on Pulse Load (Discharge depth 40%)

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.