

Features

- CRM(CQ) Super_Junction technology
- Much lower Ron*A performance for On-state efficiency
- Better efficiency due to very low FOM

Applications

- LED/LCD/PDP TV and monitor Lighting
- Solar/Renewable/UPS-Micro Inverter System
- Charger
- Power Supply

Product Summary



VDS	800V
R _{DS(on)_typ}	350mΩ
I _D	10A

100% DVDS Tested
100% Avalanche Tested


Top



Bottom


Package Marking and Ordering Information

Part #	Marking	Package	Packing	Reel Size	Tape Width	Qty
CRJF450N80G2	CRJF450N80G2	TO-220F	Tubel	N/A	N/A	50pcs

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source voltage	V _{DS}	800	V
Continuous drain current ¹⁾ T _C = 25°C T _C = 100°C	I _D	10 3	A
Pulsed drain current ²⁾ (T _C = 25°C, t _p limited by T _{jmax})	I _{D pulse}	40	A
Avalanche energy, single pulse (L=30mH, R _g =30Ω)	E _{AS}	167	mJ
MOSFET dv/dt ruggedness	dv/dt	50	V/ns
Gate-Source voltage	V _{GS}	±30	V
Power dissipation (T _C = 25°C)	P _{tot}	23	W
Continuous diode forward current(T _C = 25°C)	I _S	10	A
Diode pulse current ²⁾ (T _C = 25°C)	I _{S pulse}	40	A
Recovery diode dv/dt ³⁾	dv/dt	50	V/ns
Maximum diode commutation speed	di _f /dt	100	A/μs
Operating junction and storage temperature	T _j , T _{stg}	-55...+150	°C

 1) Limited by T_{j,max}. Maximum Duty Cycle D = 0.50; TO-220 equivalent

 2) Pulse width t_p limited by T_{j,max}

 3) Identical low side and high side switch with identical R_G

Thermal Resistance

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Thermal resistance, junction – case	R_{thJC}	-	3.8	5.32	°C/W	
Thermal resistance, junction – ambient	R_{thJA}	-	-	64	°C/W	

Electrical Characteristic (at $T_j = 25\text{ °C}$, unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		

Static Characteristic

Drain-source breakdown voltage	BV_{DSS}	800	-	-	V	$V_{GS}=0V, I_D=250\mu A$
Gate threshold voltage	$V_{GS(th)}$	3	-	4	V	$V_{DS}=V_{GS}, I_D=250\mu A$
Zero gate voltage drain current	I_{DSS}	-	-	1	μA	$V_{DS}=800V, V_{GS}=0V$ $T_j=25\text{ °C}$ $T_j=150\text{ °C}$
Gate-source leakage current	I_{GSS}	-	-	± 100	nA	$V_{GS}=\pm 30V, V_{DS}=0V$
Drain-source on-state resistance	$R_{DS(on)}$	-	350	450	mΩ	$V_{GS}=10V, I_D=5A,$ $T_j=25\text{ °C}$ $T_j=150\text{ °C}$
Transconductance	g_{fs}	-	8	-	S	$V_{DS}=20V, I_D=5A$

Dynamic Characteristic

Input Capacitance	C_{iss}	-	861	-	pF	$V_{GS}=0V, V_{DS}=100V,$ $f=1MHz$
Output Capacitance	C_{oss}	-	38	-		
Reverse Transfer Capacitance	C_{rss}	-	2	-		
Gate Total Charge	Q_G	-	25	-	nC	$V_{GS}=10V, V_{DS}=480V,$ $I_D=5A$
Gate-Source charge	Q_{gs}	-	5.4	-		
Gate-Drain charge	Q_{gd}	-	11	-		
Gate plateau voltage	$V_{plateau}$	-	5	-	V	
Turn-on delay time	$t_{d(on)}$	-	20	-	ns	$V_{GS}=10V, I_D=5A,$ $V_{DS}=400V, R_g=27\Omega$
Rise time	t_r	-	30	-		
Turn-off delay time	$t_{d(off)}$	-	100	-		
Fall time	t_f	-	30	-		
Gate resistance	R_G	-	7	-	Ω	$V_{GS}=0V, V_{DS}=0V,$ $f=1MHz$

Body Diode Characteristic

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Body Diode Forward Voltage	V_{SD}	0.7	0.89	1.2	V	$V_{GS}=0V, I_{SD}=5A$
Body Diode Reverse Recovery Time	t_{rr}	-	240	-	ns	$I_{sd}=5A$ $dI/dt=100A/us,$ $V_{ds}=400V$
Body Diode Reverse Recovery Charge	Q_{rr}	-	2.8	-	uC	

Typical Performance Characteristics

Fig 1. Output Characteristics (Tj=25°C)

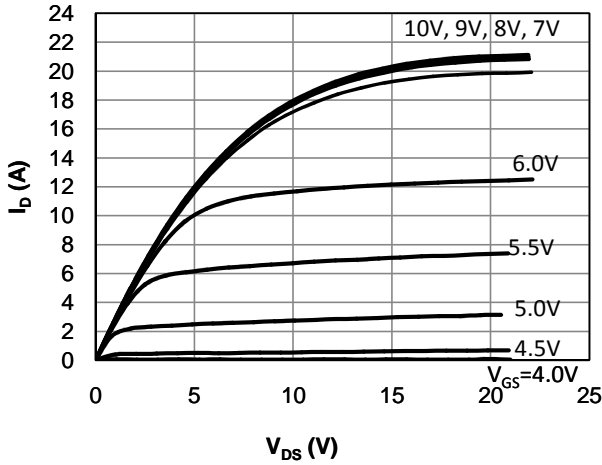


Fig 2. Output Characteristics (Tj=150°C)

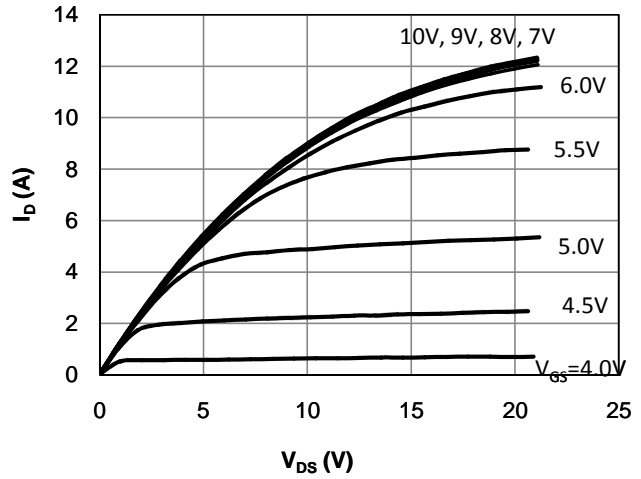


Fig 3: Transfer Characteristics

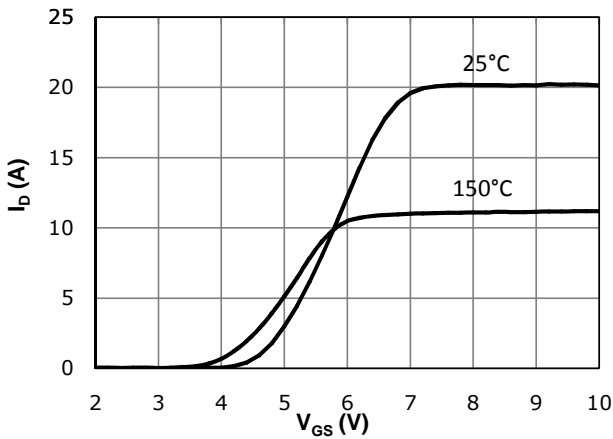


Fig 4: VTH Vs Tj Temperature Characteristics

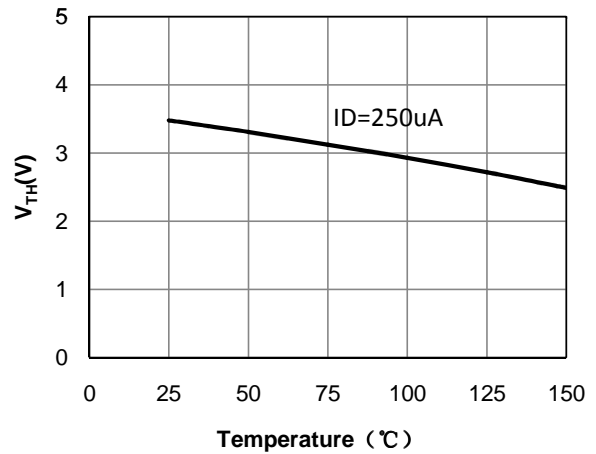


Fig 5: Rds(on) Vs Ids Characteristics(Tc=25°C)

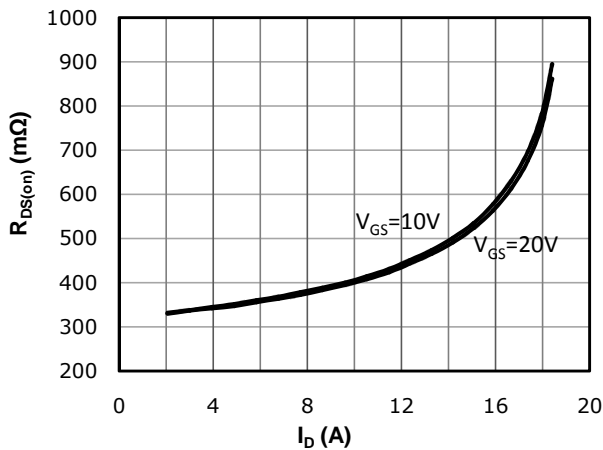


Fig 6: Rds(on) vs. Temperature

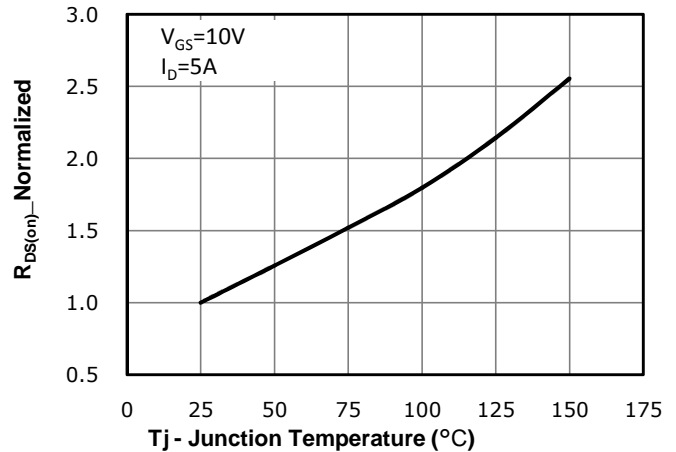


Fig 7: BVDSS vs. Temperature

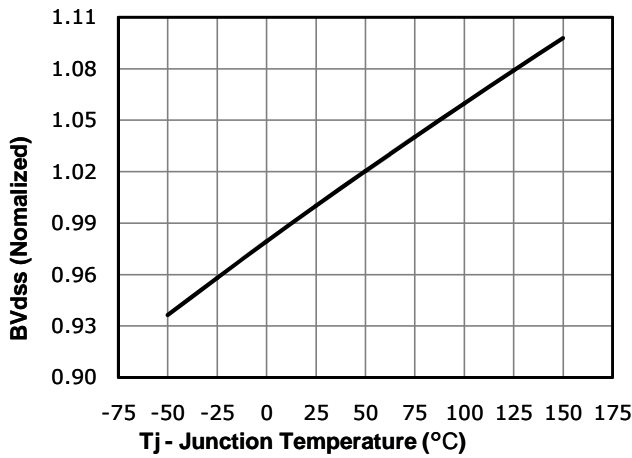


Fig 8: Rds(on) vs Gate Voltage

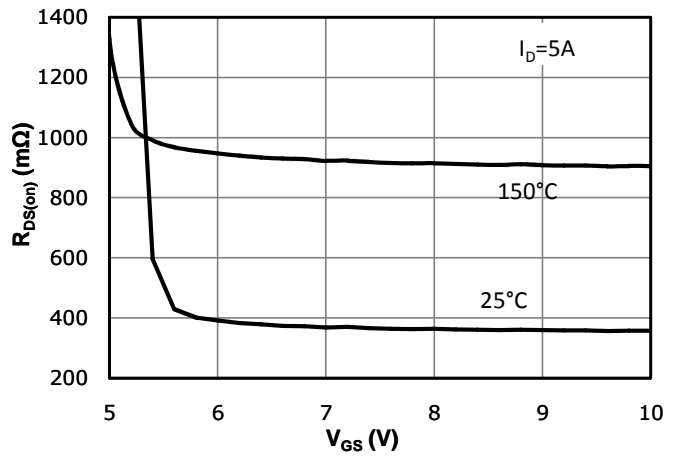


Fig 9: Body-diode Forward Characteristics

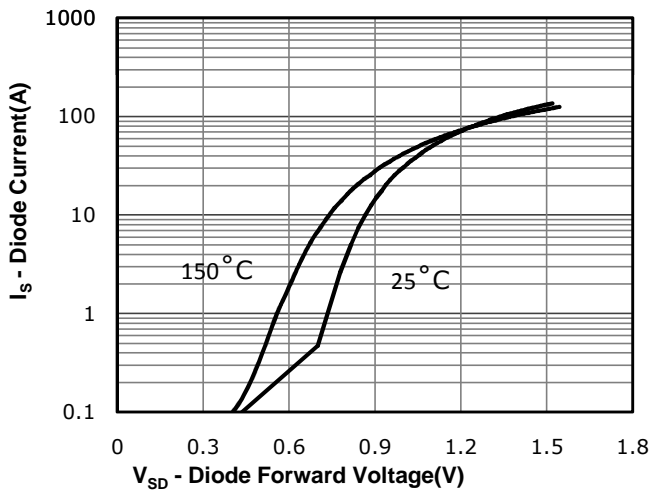


Fig 10: Gate Charge Characteristics

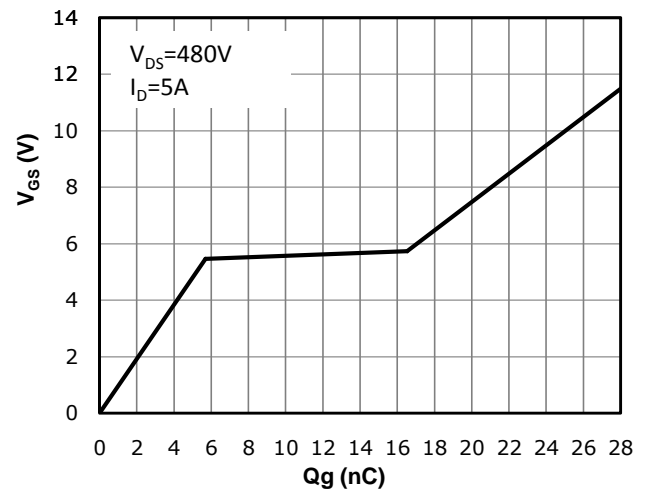


Fig 11: Capacitance Characteristics

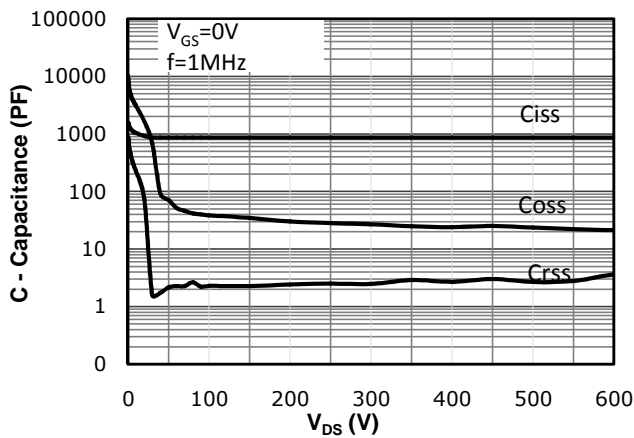


Fig 12: Safe Operating Area




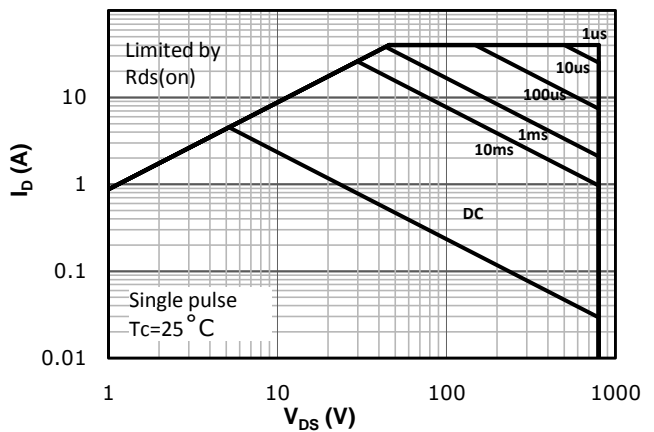


Fig 13: Max. Transient Thermal Impedance

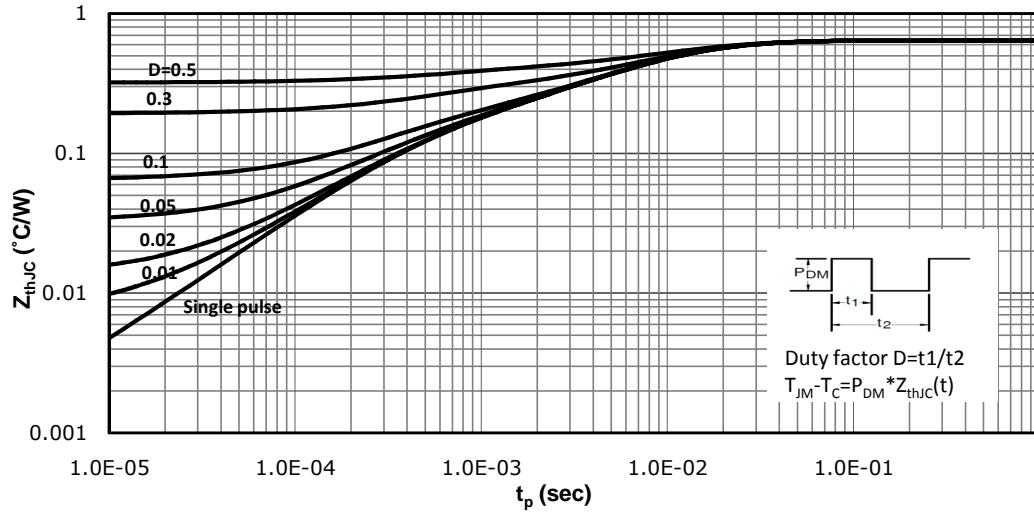
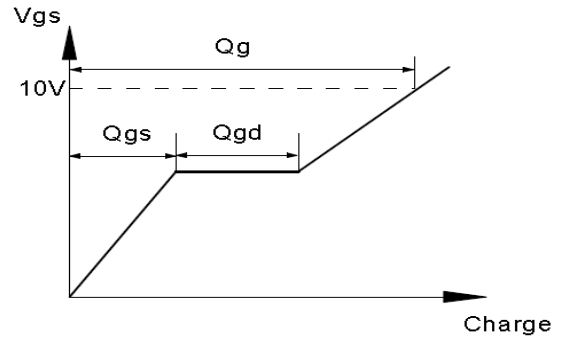


Test Circuit & Waveform



Gate Charge Test Circuit & Waveform

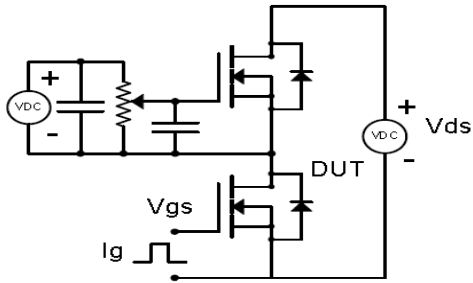



Resistive Switching Test Circuit & Waveforms

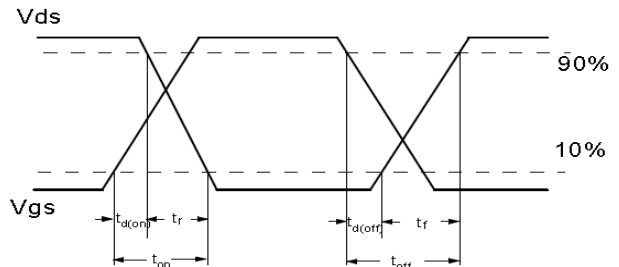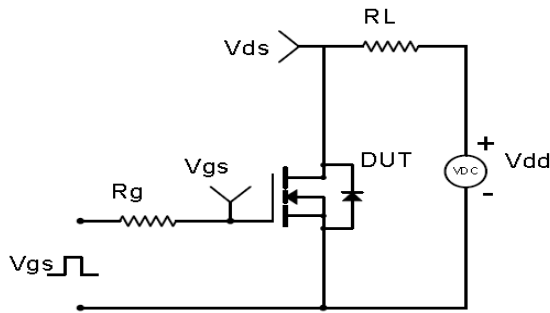


Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

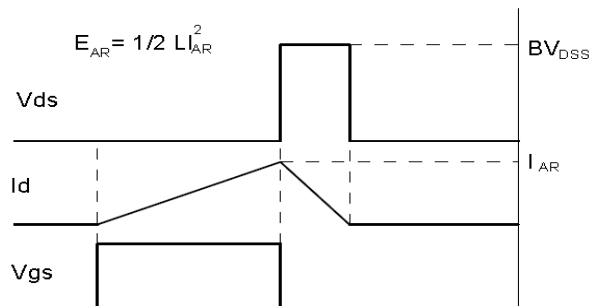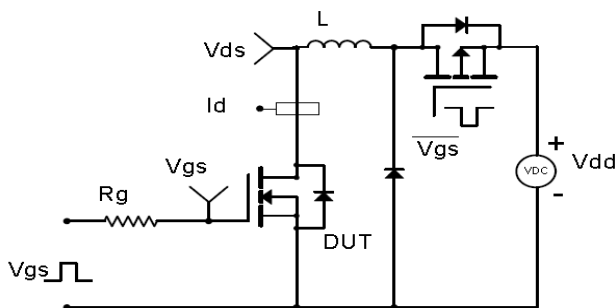

Diode Recovery Test Circuit & Waveforms

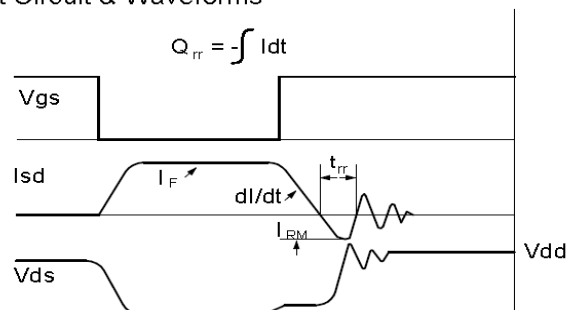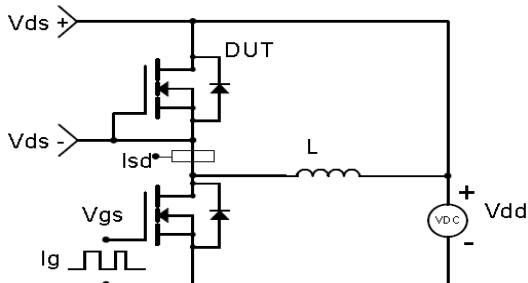

Package Outline: TO-220F

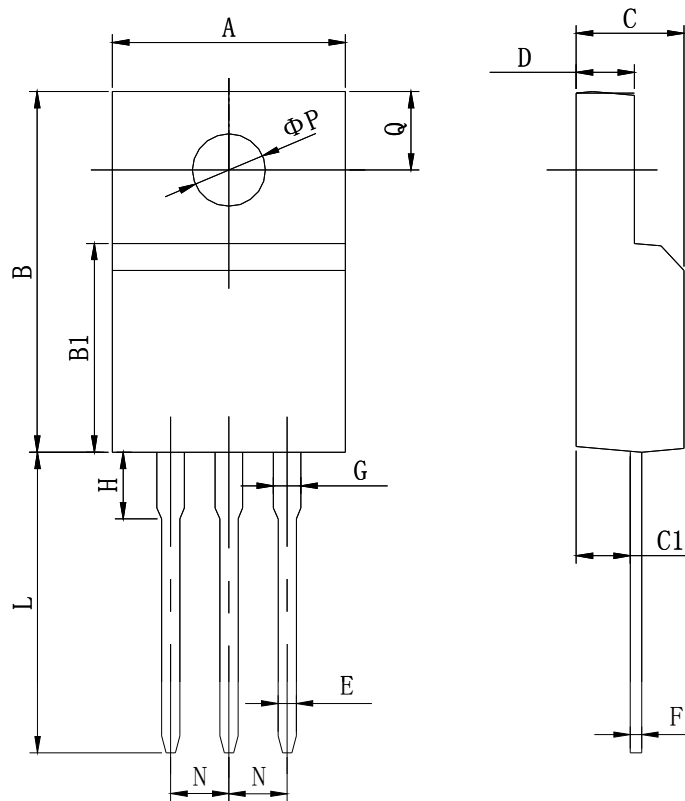

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	9.60	10.40	0.378	0.409
B	15.40	16.20	0.606	0.638
B1	8.90	9.50	0.350	0.374
C	4.30	4.90	0.169	0.193
C1	2.10	3.00	0.083	0.118
D	2.40	3.00	0.094	0.118
E	0.60	1.00	0.024	0.039
F	0.30	0.60	0.012	0.024
G	1.12	1.42	0.044	0.056
H	3.40	3.80	0.134	0.150
L*	12.00	14.00	0.472	0.551
N	2.34	2.74	0.092	0.108
Q	3.15	3.55	0.124	0.140
ΦP	2.90	3.30	0.114	0.130

Marking



 华润微电子标识
 CRJF450N80G2 产品料号

<p>NOTE: XBBAAAAY X —Assembly location code BB —Fab code AAAA —Lot code Y —Bin code</p>
--

Revision History

Revision	Date	Major changes
1.0	2022-10-12	First version

Disclaimer

Unless otherwise specified in the datasheet, the product is designed and qualified as a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability, such as automotive, aviation/aerospace and life-support devices or systems.

Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.

CRM(CQ) reserves the right to improve product design, function and reliability without notice.