

Features

- Uses CRM(CQ) advanced SkyMOS3 technology
- Extremely low on-resistance $R_{DS(on)}$
- Excellent $Q_g \times R_{DS(on)}$ product(FOM)
- Qualified according to JEDEC criteria



Applications

- Motor control and drive
- Battery management System
- UPS (Uninterruptible Power Supplies)

Product Summary

V_{DS}	120V
$R_{DS(on).typ}$	2.3mΩ
I_D	230A

100% DVDS Tested
100% Avalanche Tested

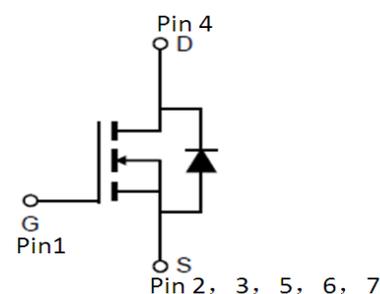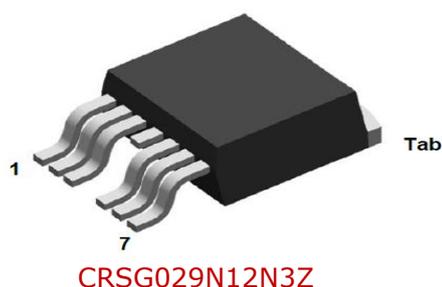
Package Marking and Ordering Information

Part #	Marking	Package	Packing	Reel Size	Tape Width	Qty
CRSG029N12N3Z	CRSG029N12N3Z	TO-263-6L	Tape&Reel	N/A	N/A	800pcs

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	120	V
Continuous drain current $T_C = 25^\circ\text{C}$ (Silicon limit) $T_C = 25^\circ\text{C}$ (Package limit) $T_C = 100^\circ\text{C}$ (Silicon limit)	I_D	230 240 145	A
Pulsed drain current ($T_C = 25^\circ\text{C}$, t_p limited by T_{jmax})	$I_{D\ pulse}$	920	A
Avalanche energy, single pulse ($I_D = 77\text{A}$, $R_g = 25\Omega$) ^[1]	E_{AS}	1468	mJ
Gate-Source voltage	V_{GS}	±20	V
Power dissipation ($T_C = 25^\circ\text{C}$)	P_{tot}	280	W
Operating junction and storage temperature	T_j, T_{stg}	-55...+150	°C

※. Notes:

1.EAS is tested at starting $T_j = 25^\circ\text{C}$, $L = 0.5\text{mH}$, $I_{AS} = 77\text{A}$, $V_{GS} = 10\text{V}$.

Thermal Resistance

Parameter	Symbol	Max	Unit
Thermal resistance, junction – case.	R_{thJC}	0.45	°C/W
Thermal resistance, junction – ambient(min. footprint)	R_{thJA}	62	

Electrical Characteristic (at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		

Static Characteristic

Drain-source breakdown voltage	BV_{DSS}	120	-	-	V	$V_{GS}=0V, I_D=250\mu A$
		120	-	-	V	$V_{GS}=0V, I_D=1mA$
Gate threshold voltage	$V_{GS(th)}$	2.0	3.0	4.0	V	$V_{DS}=V_{GS}, I_D=250\mu A$
Zero gate voltage drain current	I_{DSS}	-	-	1	μA	$V_{DS}=120V, V_{GS}=0V$ $T_j=25^\circ C$ $T_j=125^\circ C$
		-	-	100		
Gate-source leakage current	I_{GSS}	-	-	± 100	nA	$V_{GS}=\pm 20V, V_{DS}=0V$
Drain-source on-state resistance	$R_{DS(on)}$	-	2.3	2.9	mΩ	$V_{GS}=10V, I_D=90A$
Transconductance	g_{fs}	121.8	243.6	487.2	S	$V_{DS}=5V, I_D=90A$

Dynamic Characteristic

Input Capacitance	C_{iss}	6200	9300	13950	pF	$V_{GS}=0V, V_{DS}=60V,$ $f=1MHz$
Output Capacitance	C_{oss}	814	1221	1831		
Reverse Transfer Capacitance	C_{rss}	18	35	70		
Gate Total Charge	Q_G	99	147.8	222	nC	$V_{GS}=10V, V_{DS}=60V,$ $I_D=90A$
Gate-Source charge	Q_{gs}	38	57.5	86		
Gate-Drain charge	Q_{gd}	16	31.8	64		
Turn-on delay time	$t_{d(on)}$	-	37.3	-	ns	$V_{GS}=10V, V_{DD}=60V,$ $R_{G_ext}=2.7\Omega$
Rise time	t_r	-	85.7	-		
Turn-off delay time	$t_{d(off)}$	-	86.4	-		
Fall time	t_f	-	57.4	-		
Gate resistance	R_G	-	2.9	-	Ω	$V_{GS}=0V, V_{DS}=0V,$ $f=1MHz$

Body Diode Characteristic

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Body Diode Forward Voltage	V_{SD}	-	0.86	1.4	V	$V_{GS}=0V, I_{SD}=90A$
Body Diode Continuous Forward Current	I_S	-	-	230	A	$T_C = 25^{\circ}C$
Body Diode Pulsed Current	$I_{S\ pulse}$	-	-	920	A	$T_C = 25^{\circ}C$
Body Diode Reverse Recovery Time	t_{rr}	-	89.4	-	ns	$I_F=90A, dI/dt=100A/\mu s$
Body Diode Reverse Recovery Charge	Q_{rr}	-	254.0	-	nC	

Typical Performance Characteristics

Fig 1: Output Characteristics

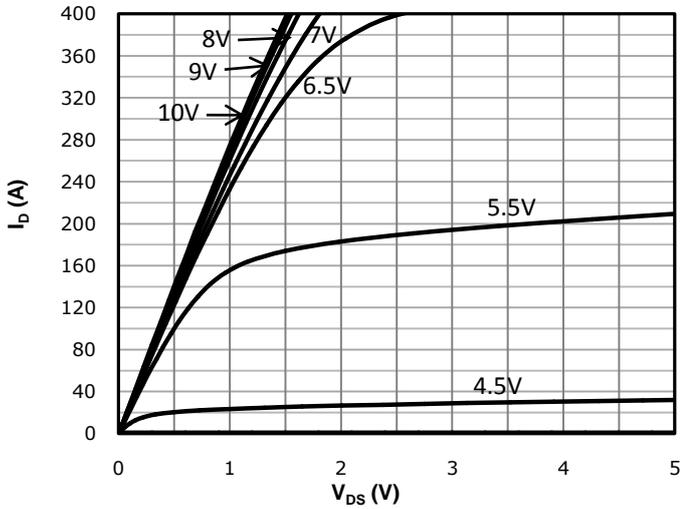


Fig 2: Transfer Characteristics

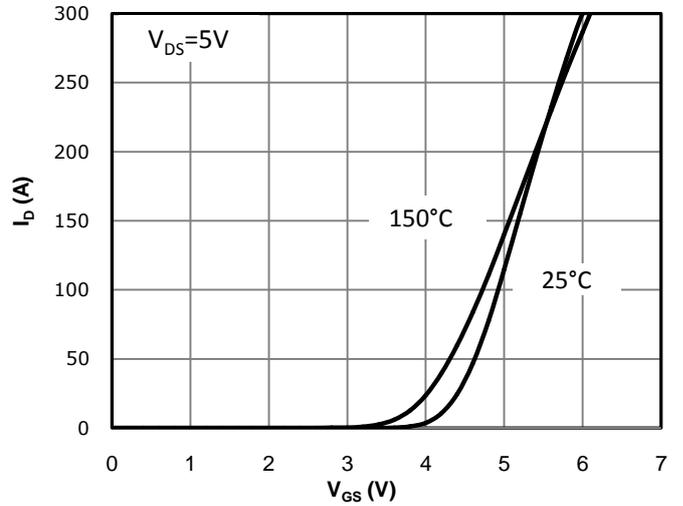


Fig 3: Rds(on) vs Drain Current and Gate Voltage

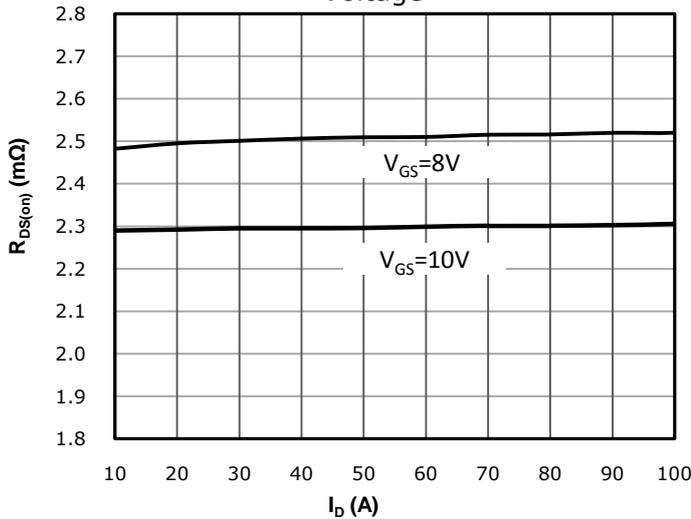


Fig 4: Rds(on) vs Gate Voltage

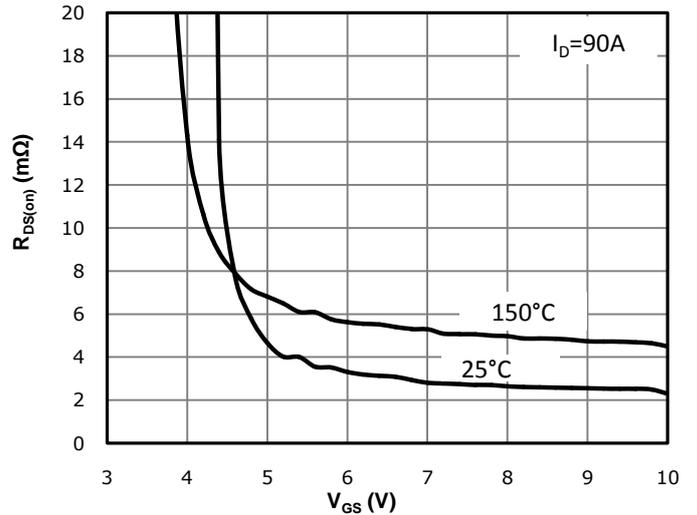


Fig 5: Rds(on) vs. Temperature

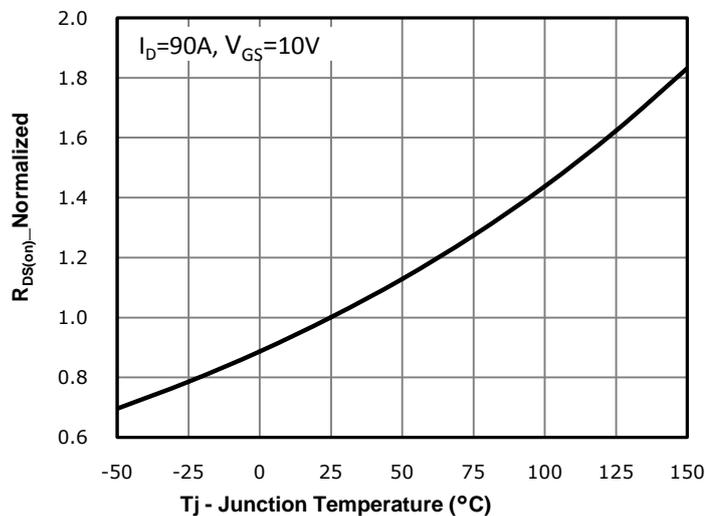


Fig 6: Vgs(th) vs. Temperature

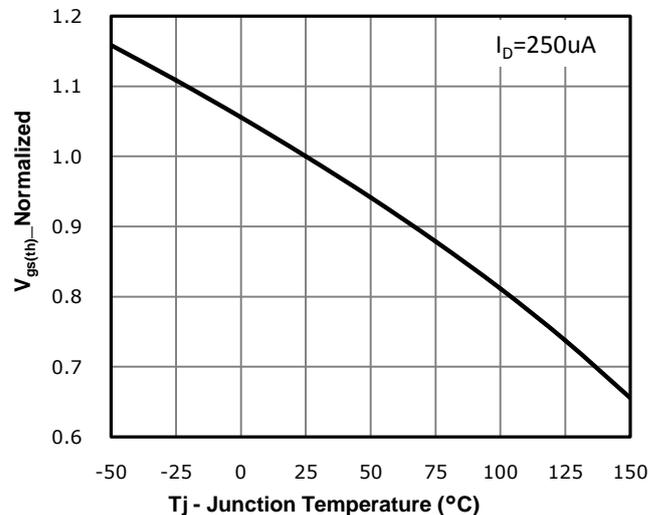


Fig 7: BVdss vs. Temperature

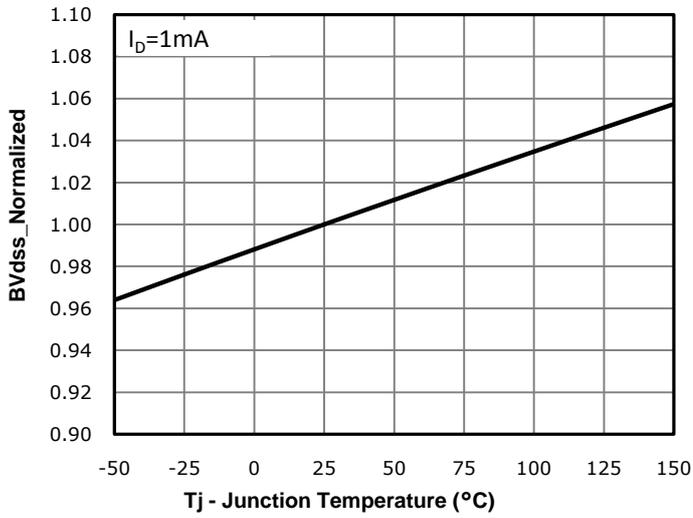


Fig 8: Capacitance Characteristics

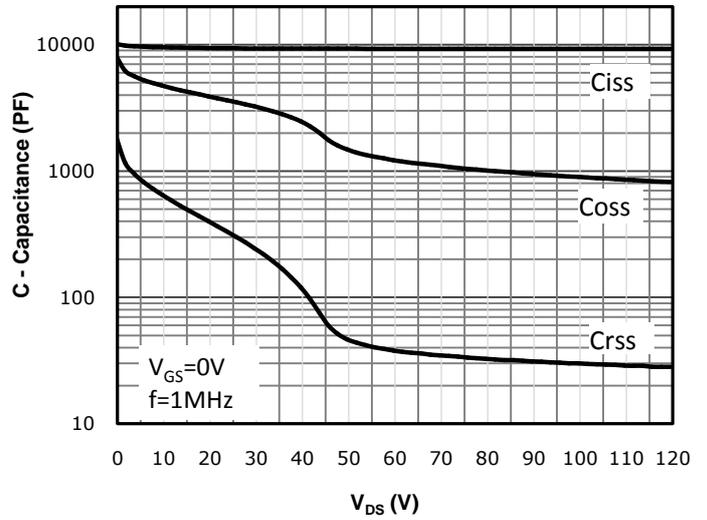


Fig 9: Gate Charge Characteristics

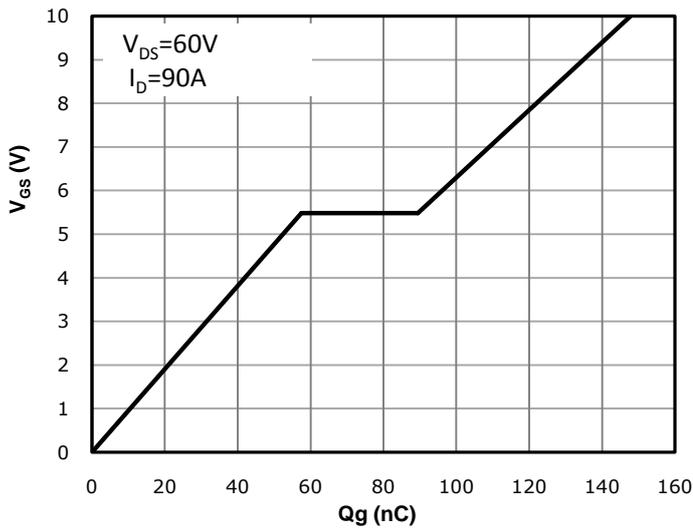


Fig 10: Body-diode Forward Characteristics

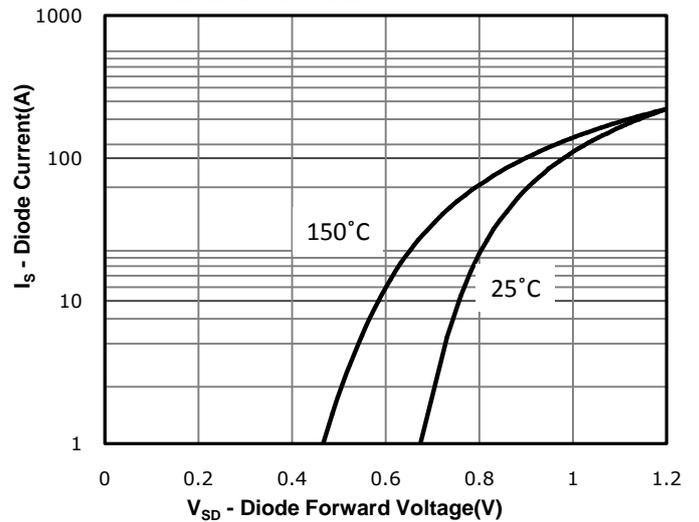


Fig 11: Power Dissipation

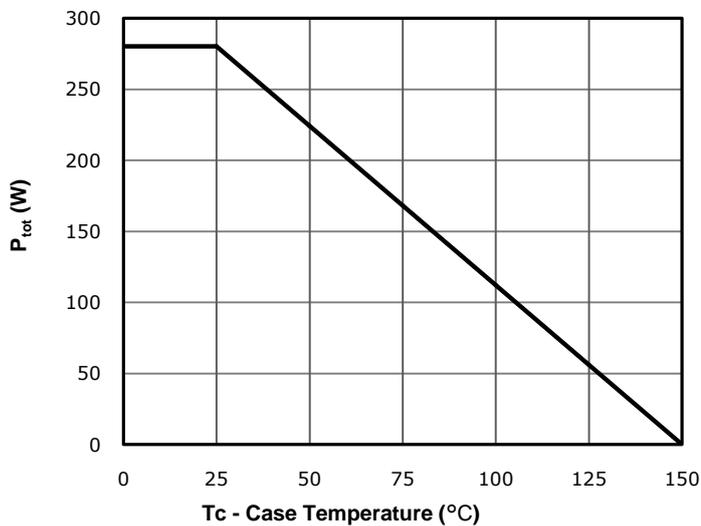


Fig 12: Drain Current Derating

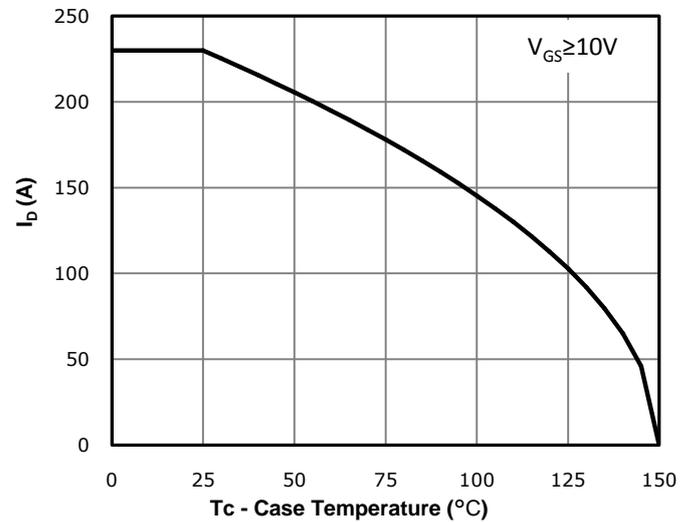


Fig 13: Safe Operating Area




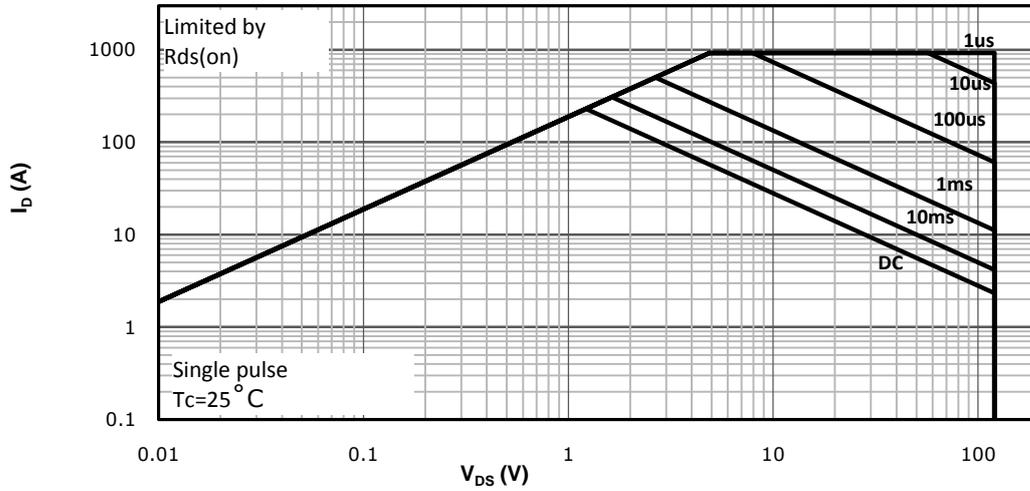


Fig 14: Max. Transient Thermal Impedance

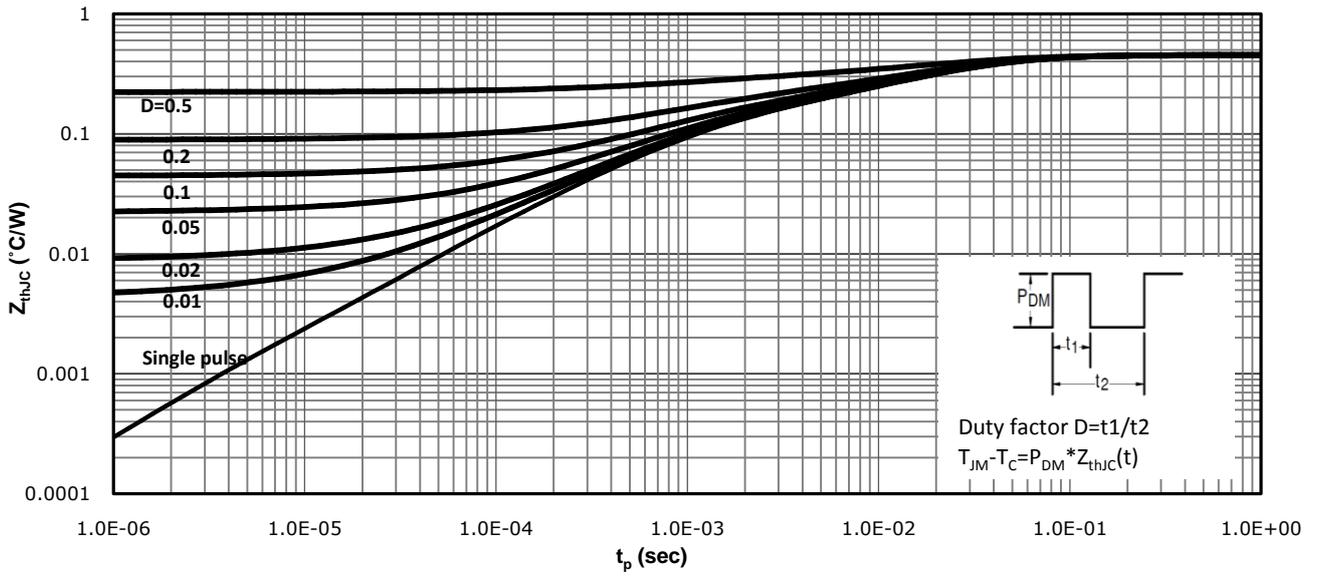
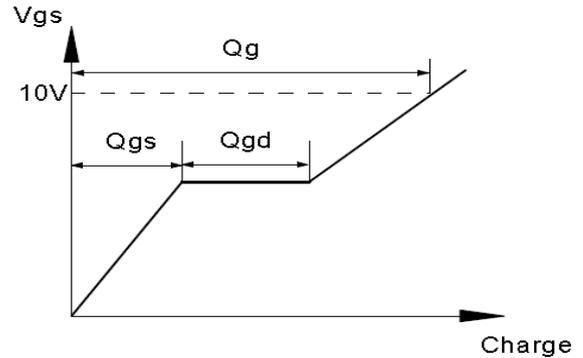


Test Circuit & Waveform



Gate Charge Test Circuit & Waveform

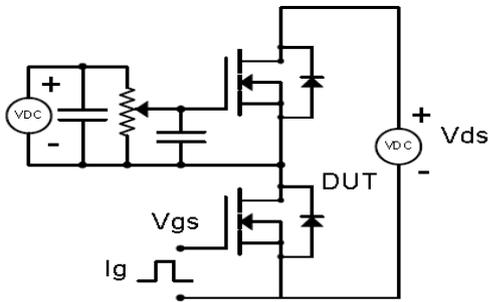



Resistive Switching Test Circuit & Waveforms

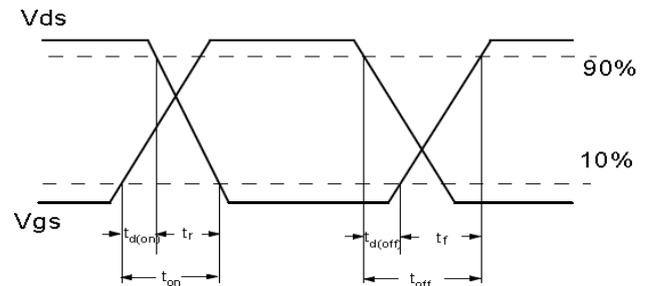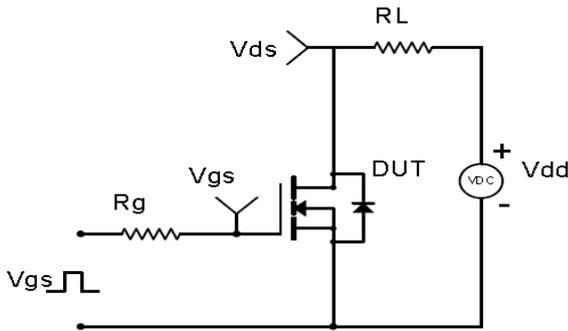


Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

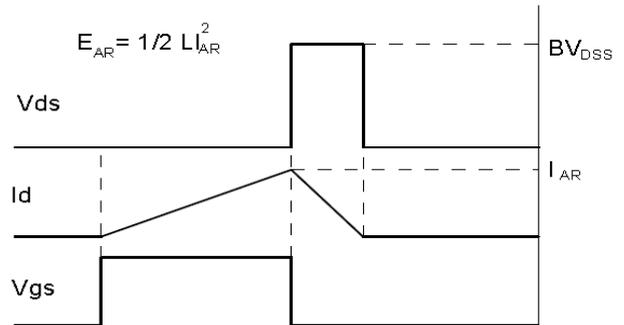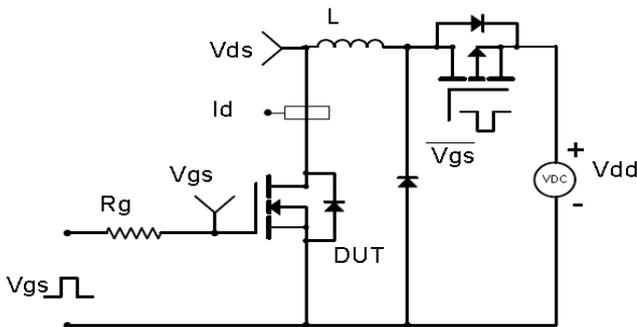

Diode Recovery Test Circuit & Waveforms

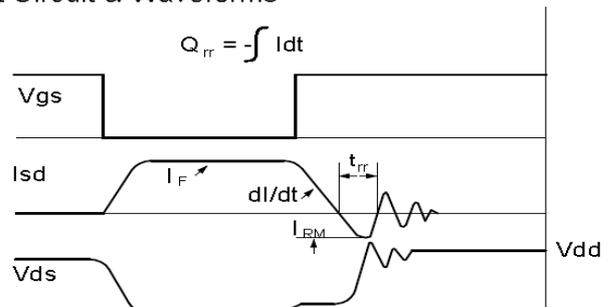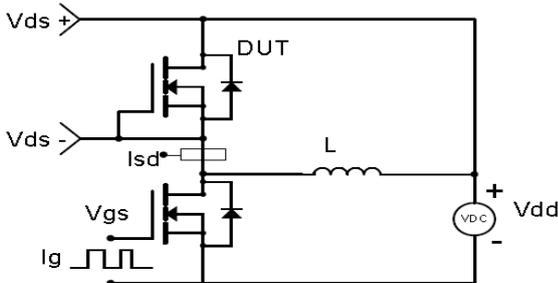

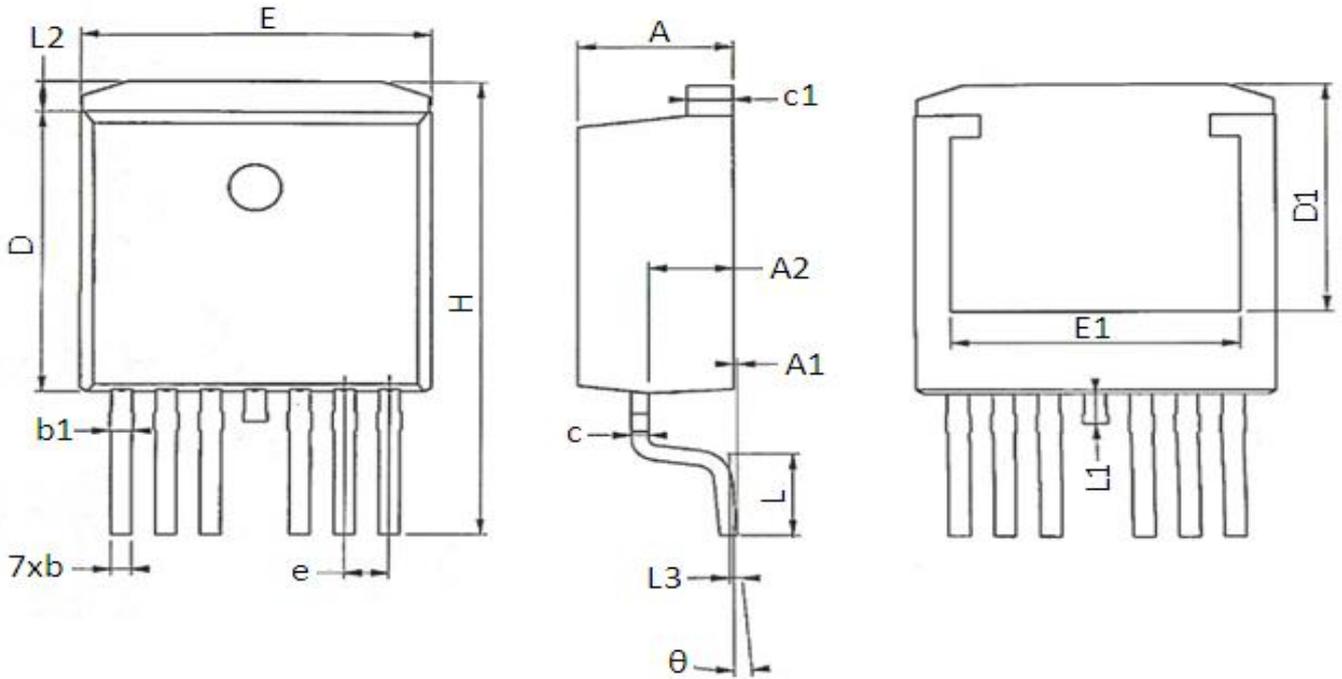Package Outline: TO-263-6L


Symbol	Dimensions In Millimeters		Dimensions In Inches		
	Min.	Max.	Min.	Max.	
A	4.24	4.64	0.167	0.183	
A1	0.00	0.25	0.000	0.010	
A2	2.25	2.70	0.089	0.106	
b	0.50	0.70	0.020	0.028	
b1	0.50	0.90	0.020	0.035	
c	0.40	0.60	0.016	0.024	
c1	1.15	1.40	0.045	0.055	
D	8.82	9.45	0.347	0.372	
D1	6.80	--	0.268	--	
e	1.27 BSC		0.050 BSC		
E	9.80	10.36	0.386	0.408	
E1	7.25	--	0.285	--	
H	14.61	15.88	0.575	0.625	
L	1.78	3.00	0.070	0.118	
L1	0.85	1.60	0.033	0.063	
L2	0.80	1.60	0.031	0.063	
L3	0.254 BSC		0.010 BSC		
θ	Option A	0°	8°	0°	8°
	Option B	0°	-8°	0°	-8°

Revision History

Revision	Date	Major changes
1.0	2023/7/29	Release of Preliminary version.

Disclaimer

Unless otherwise specified in the datasheet, the product is designed and qualified as a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability, such as automotive, aviation/aerospace and life-support devices or systems.

Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.

CRM(CQ) reserves the right to improve product design, function and reliability without notice.