

Features

- Uses CRM(CQ) advanced SkyMOS1 technology
- Extremely low on-resistance $R_{DS(on)}$
- Excellent $Q_g \times R_{DS(on)}$ product(FOM)
- Qualified according to JEDEC criteria

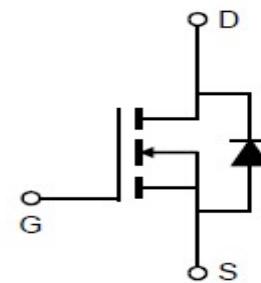
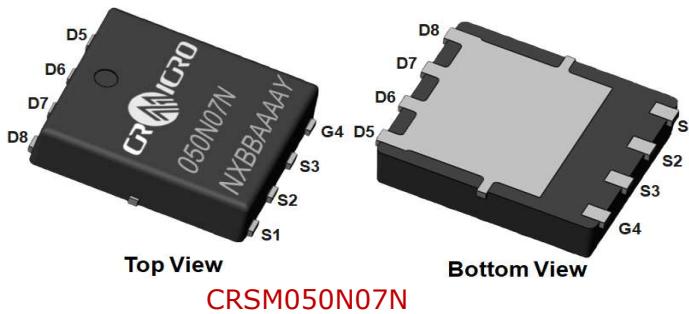
Product Summary

V_{DS}	70V
$R_{DS(on)}$ @10V typ	3.7mΩ
$R_{DS(on)}$ @8V typ	4.2mΩ
I_D	80A

Applications

- Synchronous Rectification for Converters
- Charger for Mobile Devices
- Battery management System

**100% DVDS Tested
100% Avalanche Tested**


Package Marking and Ordering Information

Part #	Marking	Package	Packing	Reel Size	Tape Width	Qty
CRSM050N07N	050N07N	DFN5X6 Al Rib	Tape	N/A	N/A	5000pcs

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	70	V
Continuous drain current $T_C = 25^\circ\text{C}$ (Silicon limit) $T_C = 25^\circ\text{C}$ (Package limit) $T_C = 100^\circ\text{C}$ (Silicon limit)	I_D	89 80 56	A
Pulsed drain current ($T_C = 25^\circ\text{C}$, t_p limited by T_{jmax})	I_D pulse	320	A
Avalanche energy, single pulse ($I_D = 25\text{A}$, $R_g=25\Omega$)	E_{AS}	156	mJ
Gate-Source voltage	V_{GS}	± 20	V
Power dissipation ($T_C = 25^\circ\text{C}$)	P_{tot}	70	W
Operating junction and storage temperature	T_j , T_{stg}	-55...+150	°C
Soldering temperature, wave soldering only allowed at leads (1.6mm from case for 10s)	T_{sold}	260	°C

※. Notes:

 1.EAS is tested at starting $T_j = 25^\circ\text{C}$, $L = 0.5\text{mH}$, $I_{AS} = 25\text{A}$, $V_{GS} = 10\text{V}$.

 2.Repetitive rating, pulse width limited by junction temperature $T_J(\text{MAX})=150^\circ\text{C}$. Ratings are based on low frequency and duty cycles to keep initial $T_J = 25^\circ\text{C}$.

Thermal Resistance

Parameter	Symbol	Max	Unit
Thermal resistance, junction – case.	R _{thJC}	1.78	°C/W
Thermal resistance, junction – ambient(min. footprint)	R _{thJA}	52	

Electrical Characteristic (at T_j = 25 °C, unless otherwise specified)

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		

Static Characteristic

Drain-source breakdown voltage	BV _{DSS}	70	-	-	V	V _{GS} =0V, I _D =250uA
Gate threshold voltage	V _{GS(th)}	2.0	3.0	4.0	V	V _{DS} =V _{GS} , I _D =250uA
Zero gate voltage drain current	I _{DSS}	-	-	1 100	μA	V _{DS} =70V, V _{GS} =0V T _j =25°C T _j =150°C
Gate-source leakage current	I _{GSS}	0	±10	±100	nA	V _{GS} =±20V, V _{DS} =0V
Drain-source on-state resistance	R _{DS(on)}	-	3.7 4.2	5.0 5.5	mΩ	V _{GS} =10V, I _D =40A V _{GS} =8V, I _D =32A
Transconductance	g _f	-	108	-	S	V _{DS} =5V, I _D =40A

Dynamic Characteristic

Input Capacitance	C _{iss}	-	3690	-	pF	V _{GS} =0V, V _{DS} =35V, f=1MHz
Output Capacitance	C _{oss}	-	893	-		
Reverse Transfer Capacitance	C _{rss}	-	38	-		
Gate Total Charge	Q _G	-	57.9	-	nC	V _{GS} =10V, V _{DS} =35V, I _D =40A, f=1MHz
Gate-Source charge	Q _{gs}	-	5.5	-		
Gate-Drain charge	Q _{gd}	-	12.4	-		
Turn-on delay time	t _{d(on)}	-	18.1	-	ns	V _{GS} =10V, V _{DD} =35V, R _{G_ext} =3Ω
Rise time	t _r	-	82.9	-		
Turn-off delay time	t _{d(off)}	-	38.9	-		
Fall time	t _f	-	86.0	-		
Gate resistance	R _G	-	2.3	-	Ω	V _{GS} =0V, V _{DS} =0V, f=1MHz

Body Diode Characteristic

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Body Diode Forward Voltage	V _{SD}	-	0.87	1.4	V	V _{GS} =0V, I _{SD} =40A
Body Diode Reverse Recovery Time	t _{rr}	-	53.3	-	ns	I _F =40A, dI/dt=100A/μs
Body Diode Reverse Recovery Charge	Q _{rr}	-	70.2	-	nC	

Typical Performance Characteristics

Fig 1: Output Characteristics

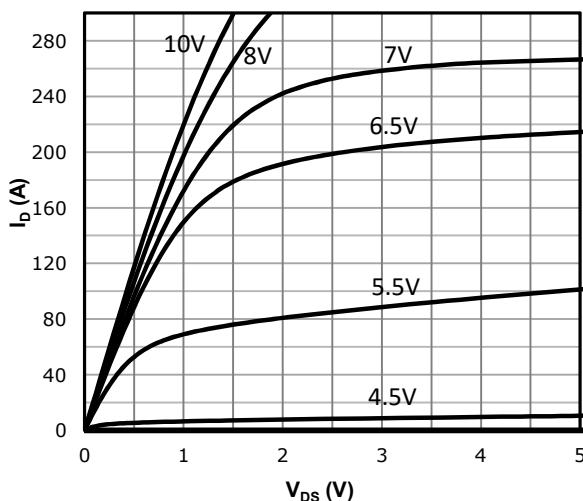


Fig 2: Transfer Characteristics

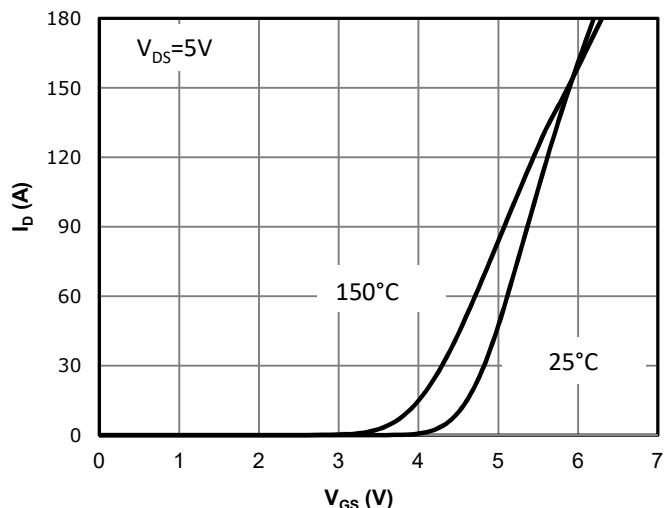


Fig 3: Rds(on) vs Drain Current and Gate Voltage

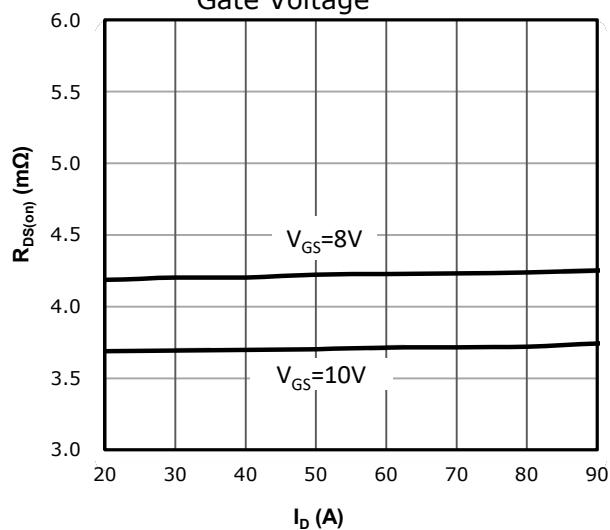


Fig 4: Rds(on) vs Gate Voltage

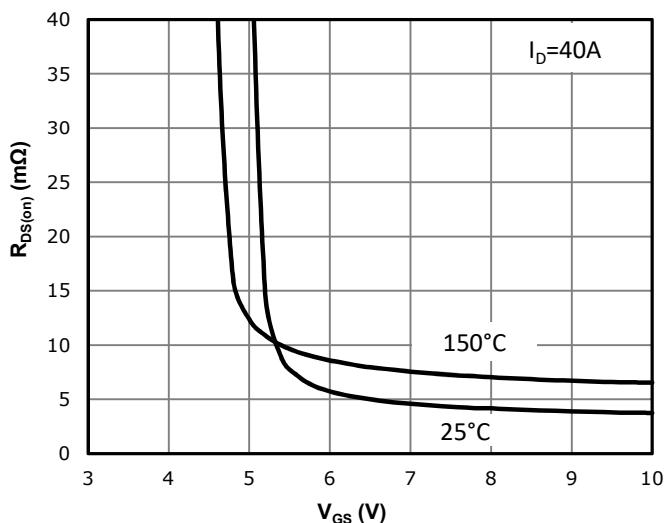


Fig 5: Rds(on) vs. Temperature

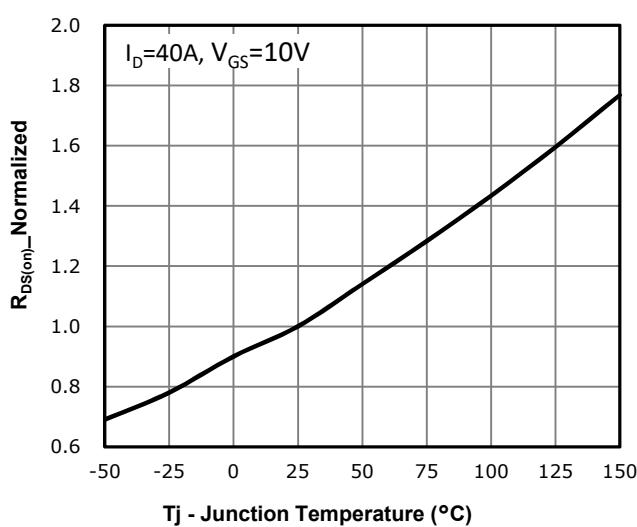


Fig 6: Capacitance Characteristics

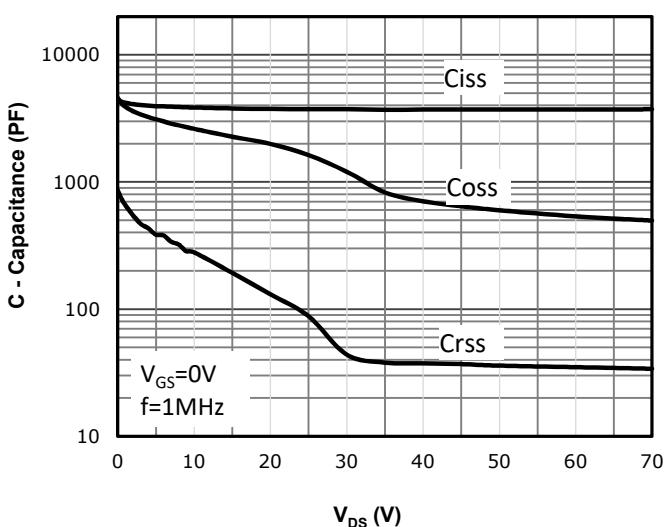


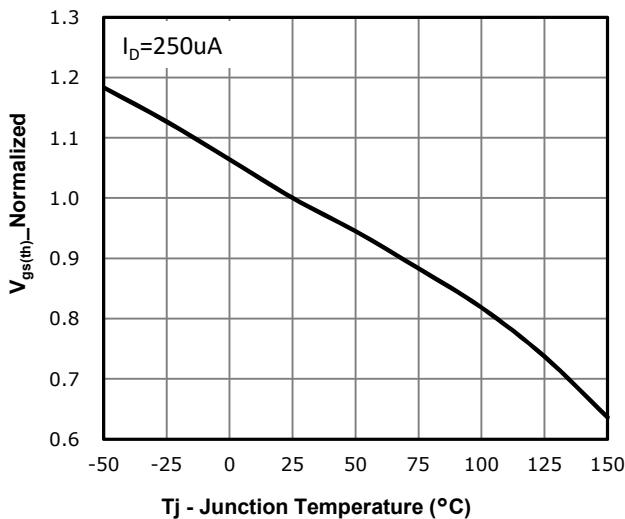
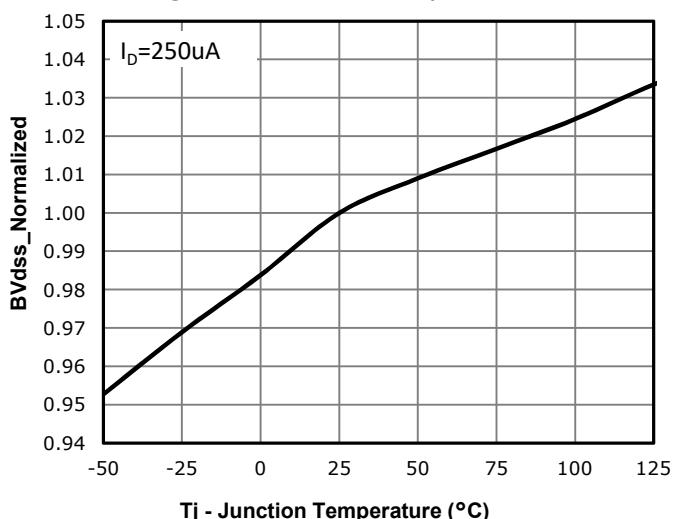
Fig 7: $V_{gs(th)}$ vs. Temperature

 Fig 8: BV_{dss} vs. Temperature


Fig 9: Gate Charge Characteristics

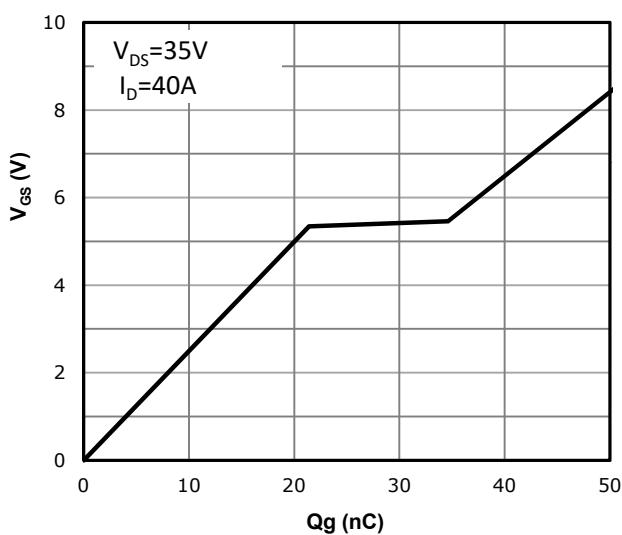


Fig 10: Body-diode Forward Characteristics

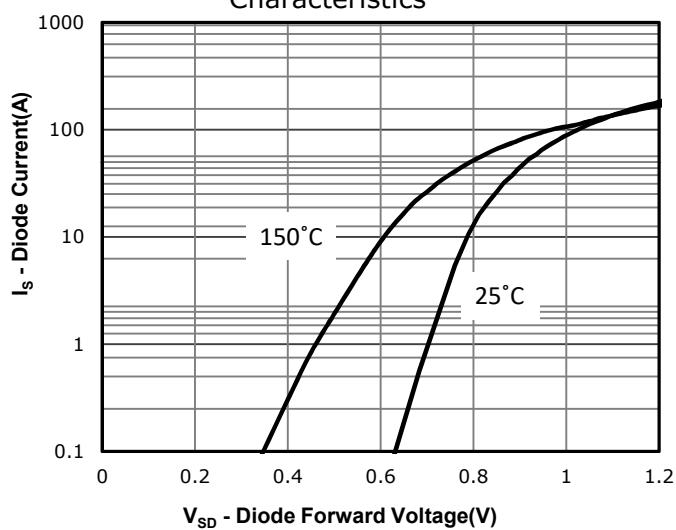


Fig 11: Power Dissipation

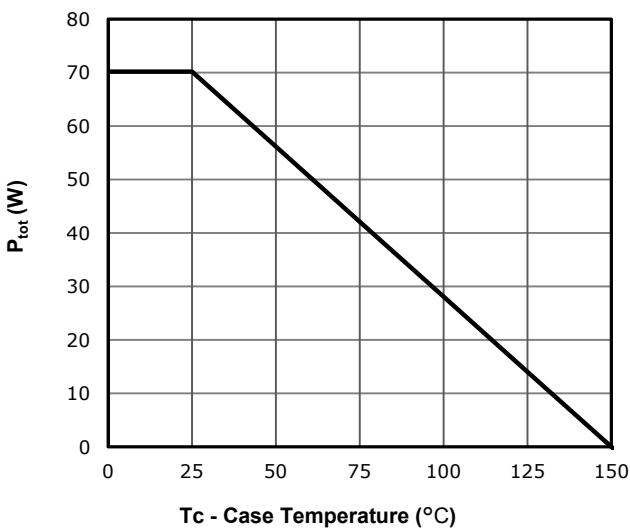


Fig 12: Drain Current Derating

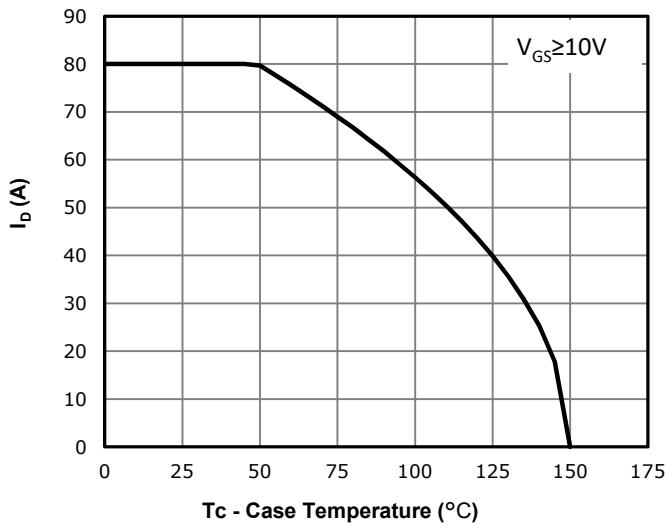


Fig 13: Safe Operating Area

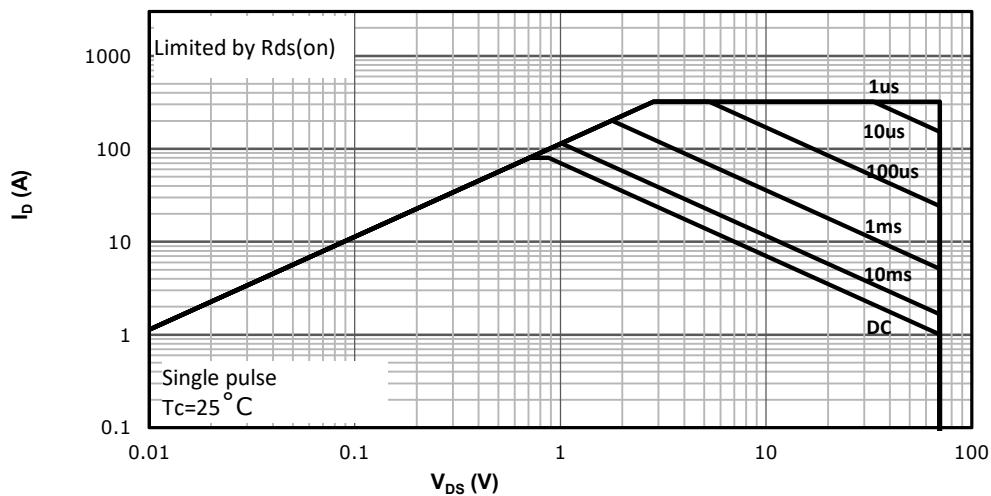
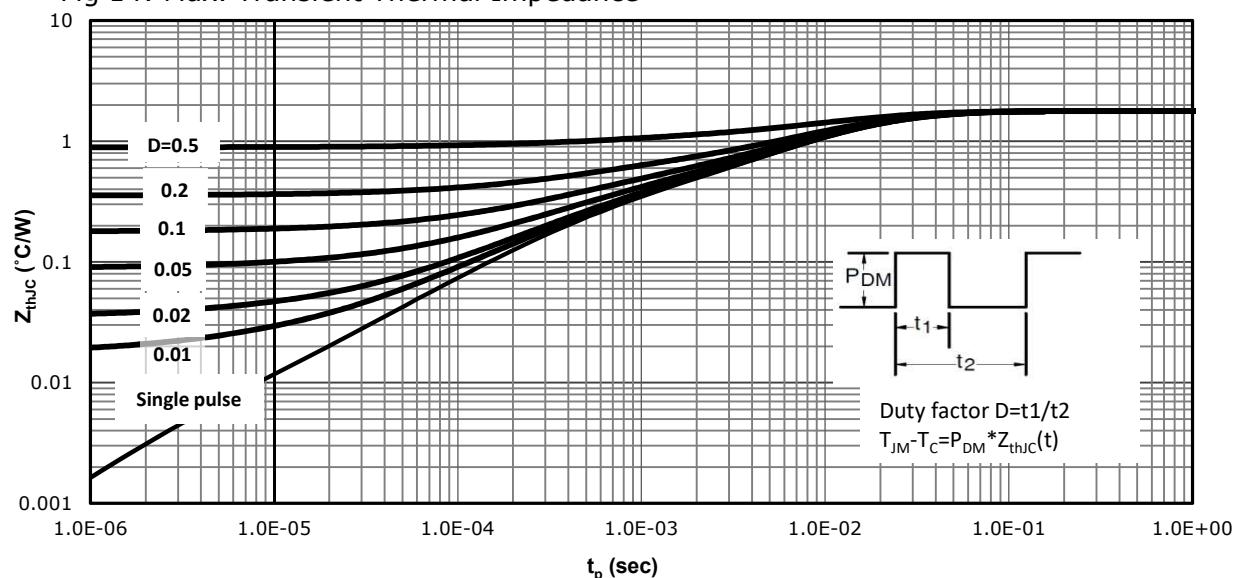
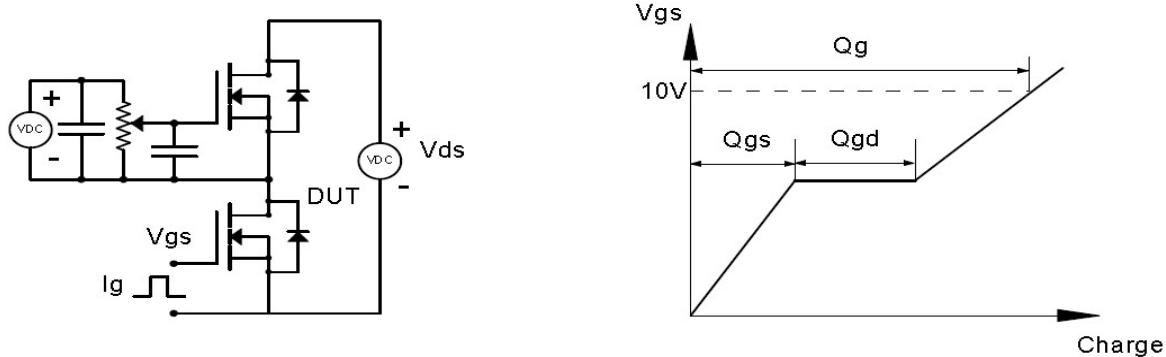


Fig 14: Max. Transient Thermal Impedance

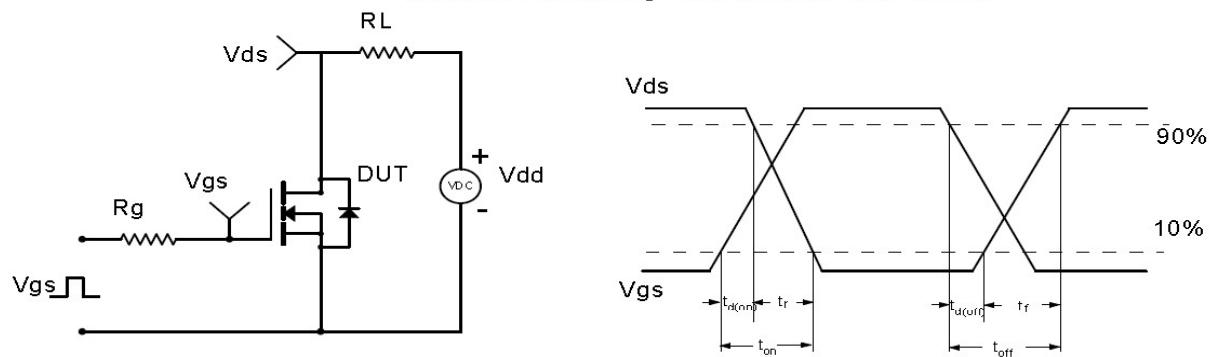


Test Circuit & Waveform

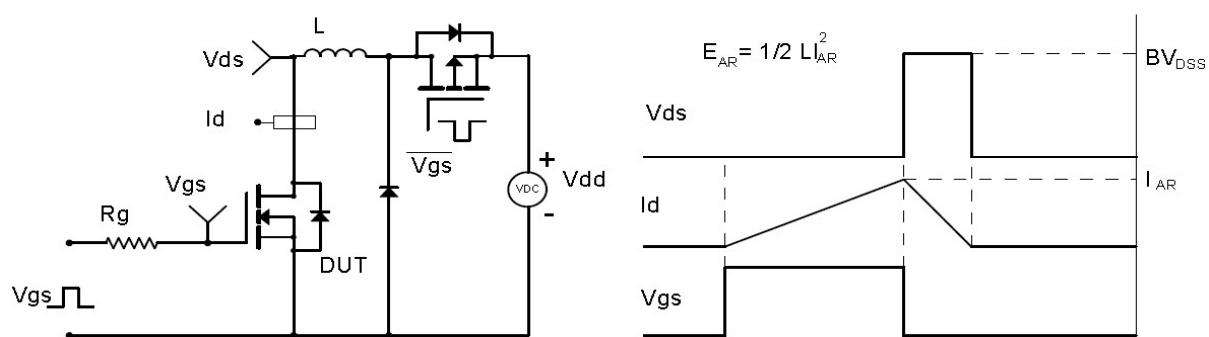
Gate Charge Test Circuit & Waveform



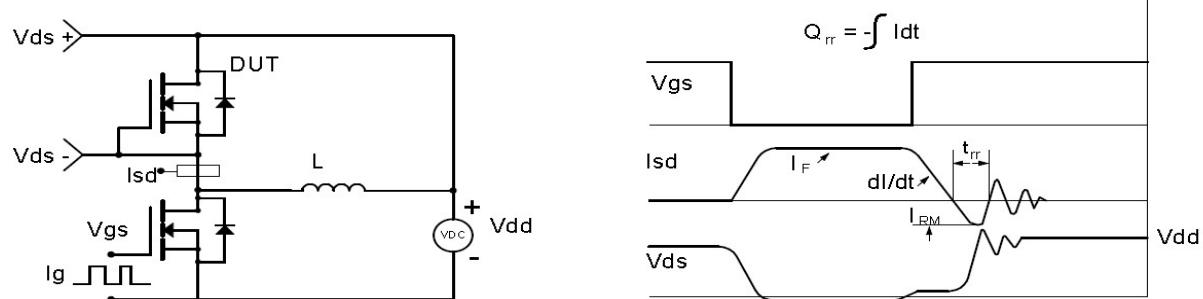
Resistive Switching Test Circuit & Waveforms

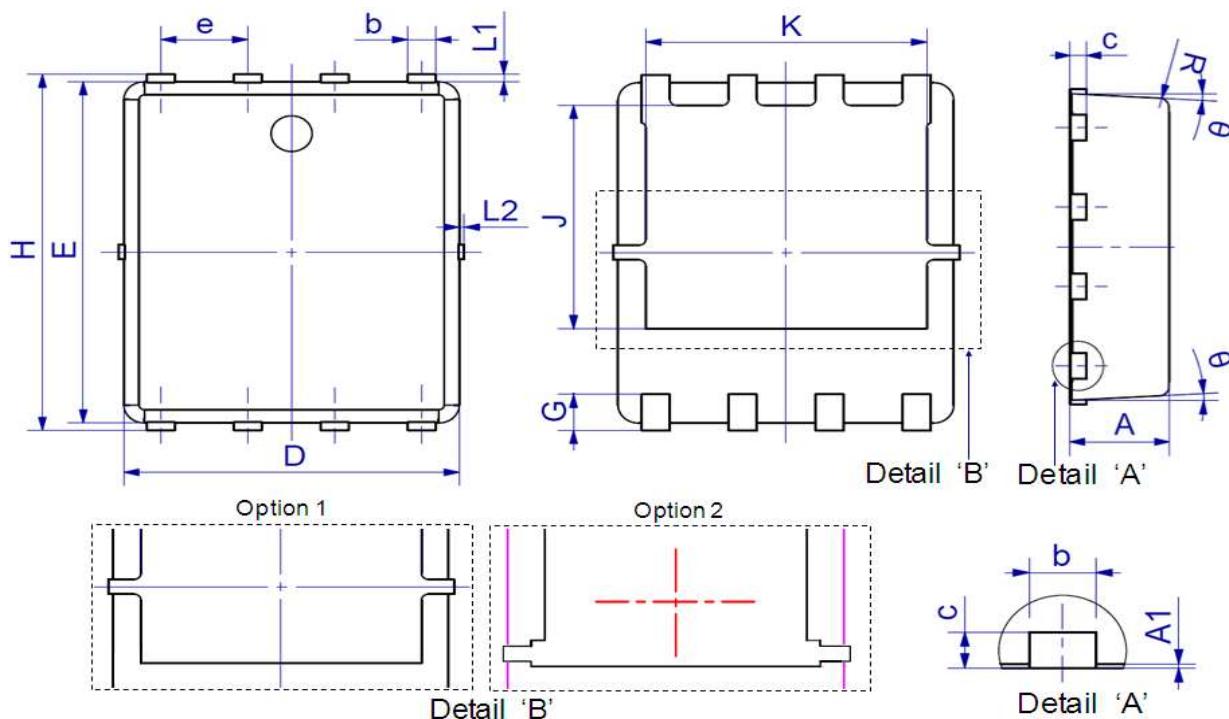


Unclamped Inductive Switching (UIS) Test Circuit & Waveforms



Diode Recovery Test Circuit & Waveforms



Package Outline: DFN5X6


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.80	1.20	0.031	0.047
A1	0.00	0.05	0.000	0.002
b	0.30	0.51	0.012	0.020
c	0.15	0.35	0.006	0.014
D	4.80	5.40	0.189	0.213
e	1.27 BSC		0.050 BSC	
E	5.66	6.06	0.223	0.239
G	0.30	0.71	0.012	0.028
H	5.90	6.35	0.232	0.250
J	3.32	3.92	0.131	0.154
K	3.61	4.25	0.142	0.167
L1	0.05	0.25	0.002	0.010
L2	0.00	0.15	0.000	0.006
R	0.25 REF		0.010 REF	
θ	0°	12°	0°	12°

Marking



NOTE:

NXBAAAAY

N —Wire Bond code

X —Assembly location code

BB —Fab code

AAAA —Lot code

Y —Bin code



华润微电子(重庆)有限公司

CRSM050N07N

SkyMOS1 N-MOSFET 70V, 3.7mΩ, 80A

Revision History

Revison	Date	Major changes
1.0	2022/4/12	Release of Preliminary version.

Disclaimer

Unless otherwise specified in the datasheet, the product is designed and qualified as a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability, such as automotive, aviation/aerospace and life-support devices or systems.

Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.

CRM(CQ) reserves the right to improve product design, function and reliability without notice.