

Main Product Characteristics

| | |
|-------------|-------|
| $I_{F(AV)}$ | 2x15A |
| V_{RRM} | 45V |
| T_J | 150°C |
| $V_{(TYP)}$ | 0.41V |

Features

- Low forward voltage drop.
- Excellent high temperature stability.
- Fast switching capability.
- Suffix "G" indicates Halogen-free part, ex. CS30S45CTG-A.
- Lead free in compliance with EU RoHS.

Mechanical data


- Epoxy : UL94-V0 rated flame retardant.
- Case : JEDEC TO-220AB molded plastic body.
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026.
- Polarity : As marked.
- Mounting Position : Any.
- Weight : Approximated 2.25 gram.

Maximum ratings and electrical characteristics


Rating at 25°C ambient temperature unless otherwise specified.

Outline

TO-220AB

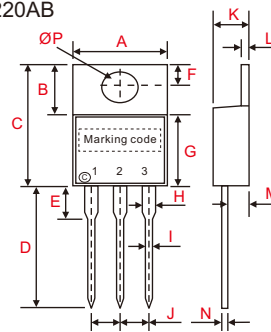

| symbol | Dimensions in inches(millimeters) | |
|--------|-----------------------------------|-------------|
| | Min | Max |
| A | 0.398(10.1) | 0.406(10.3) |
| B | 0.236(6.0) | 0.252(6.4) |
| C | 0.579(14.7) | 0.594(15.1) |
| D | 0.543(13.8) | 0.551(14.0) |
| E | 0.143(3.63) | 0.159(4.03) |
| F | 0.104(2.64) | 0.112(2.84) |
| G | 0.335(8.5) | 0.350(8.9) |
| H | 0.046(1.17) | 0.054(1.37) |
| I | 0.028(0.71) | 0.036(0.91) |
| J | 0.098(2.49) | 0.102(2.59) |
| K | 0.176(4.47) | 0.184(4.67) |
| L | 0.046(1.17) | 0.054(1.37) |
| M | 0.102(2.6) | 0.110(2.8) |
| N | 0.019(0.28) | 0.021(0.48) |
| ØP | 0.147(3.74) | 0.155(3.94) |



| symbol | Dimensions in inches(millimeters) | |
|--------|-----------------------------------|--------------|
| | Min | Max |
| A | 0.394(10.0) | 0.413(10.5) |
| B | 0.228(5.8) | 0.268(6.8) |
| C | 0.570(14.48) | 0.625(15.87) |
| D | 0.519(13.18) | 0.558(14.18) |
| E | 0.089(3.5) | 0.099(3.9) |
| F | 0.100(2.54) | 0.120(3.04) |
| G | 0.330(8.38) | 0.350(8.9) |
| H | 0.045(1.15) | 0.060(1.52) |
| I | 0.029(0.75) | 0.037(0.95) |
| J | 0.095(2.42) | 0.105(2.66) |
| K | 0.160(4.07) | 0.190(4.82) |
| L | 0.045(1.15) | 0.055(1.39) |
| M | 0.080(2.04) | 0.110(2.8) |
| N | 0.013(0.33) | 0.019(0.52) |
| ØP | 0.148(3.75) | 0.156(3.95) |



Dimensions in inches and (millimeters)

| Parameter | Conditions | Symbol | CS30S45CT-A | UNIT |
|--|--|-----------------|-------------|------|
| Working peak reverse voltage | | V_{RWM} | 45 | V |
| Forward rectified current | | I_O | 30 | A |
| Forward surge current | 8.3ms single half sine-wave superimposed on rate load (JEDEC method) | I_{FSM} | 320 | A |
| Peak repetitive reverse surge current | 2us - 1kHz | I_{RRM} | 2 | A |
| Typical Thermal resistance (per diode) | Junction to case | $R_{\theta JC}$ | 2 | °C/W |
| | Junction to ambient | $R_{\theta JA}$ | 50 | °C/W |
| Storage temperature | | T_{STG} | -55 ~ +150 | °C |
| Operating Junction temperature | | T_J | -55 ~ +150 | °C |

| Parameter | Conditions | Symbol | MIN. | TYP. | MAX. | UNIT |
|---------------------------------------|------------------------------------|----------|------|------|------|------|
| Forward voltage drop | $I_F = 3A, T_J = 25^\circ C$ | V_F | | 330 | | mV |
| | $I_F = 15A, T_J = 25^\circ C$ | | | 470 | | |
| | $I_F = 15A, T_J = 125^\circ C$ | | | 410 | | |
| Reverse current | $V_R = V_{RRM}, T_J = 25^\circ C$ | I_R | | | 0.5 | mA |
| | $V_R = V_{RRM}, T_J = 125^\circ C$ | | | | 100 | |
| Reverse Breakdown Voltage (per diode) | $I_R = 0.5mA, T_J = 25^\circ C$ | V_{BR} | 45 | | | V |

Rating and characteristic curves

Fig. 1 - Forward Characteristics

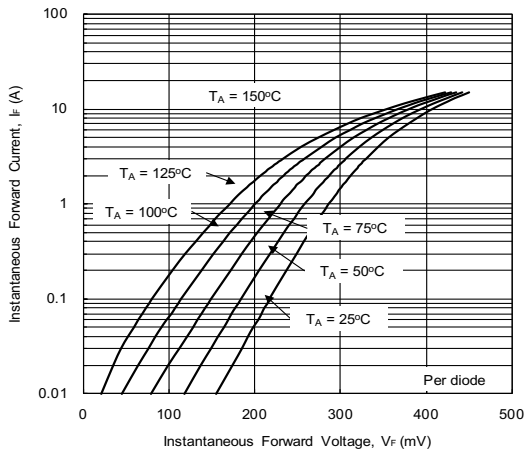


Fig. 2 - Reverse Characteristics

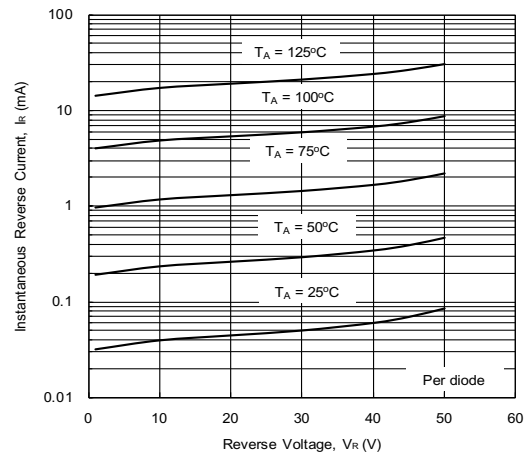


Fig. 3 - Forward Power Dissipation

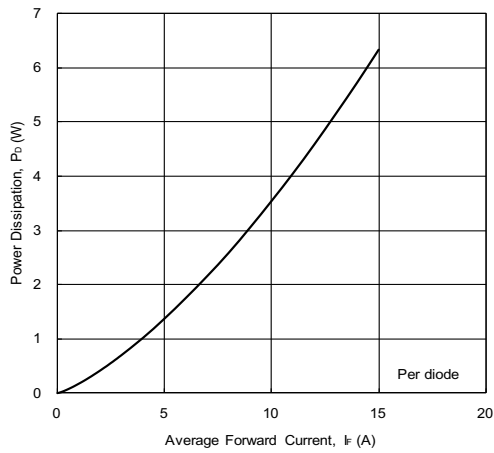


Fig. 4 - Forward Current Derating Curve



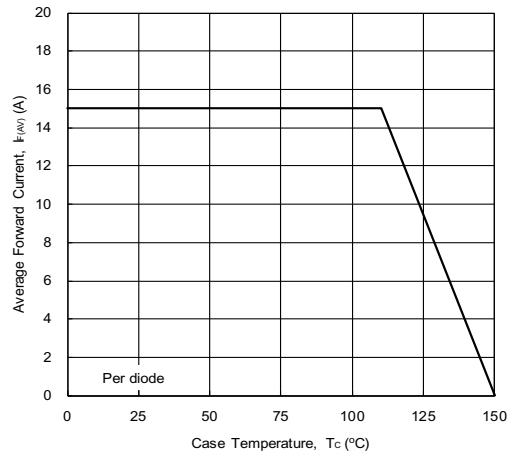



Fig. 5 - Junction Capacitance

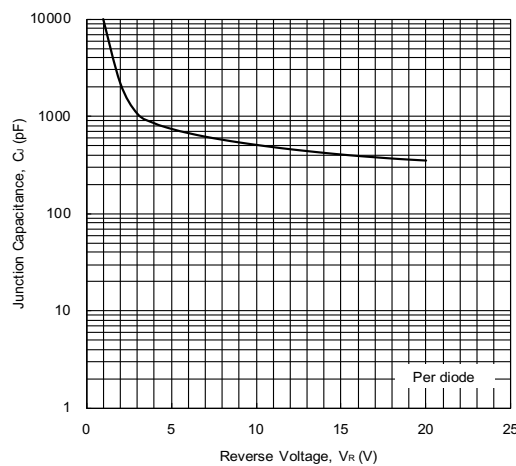

■ Marking Information

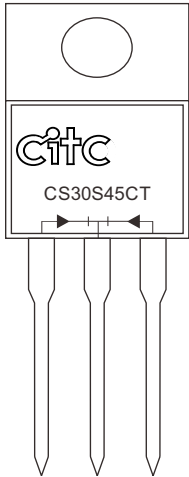

CS30S45CT : Product type marking code

 : CITC Logo

■ Ordering / Packing Information

| Part number | | Case | Q'TY/Tube (PCS) | Q'TY/Box (PCS) | Q'TY/Carton (PCS) |
|--------------|--------------|----------|-----------------|----------------|-------------------|
| Halogen | CS30S45CT-A | TO-220AB | 50 | 1000 | 5000 |
| Halogen free | CS30S45CTG-A | | | | |

Notes : 1. For packaging details please reference our website at <http://www.citcorp.com.tw/tchinese/products/index.php>

- CITC reserves the right to make changes to this document and its products and specifications at any time without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- CITC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CITC assume any liability for application assistance or customer product design.
- CITC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of CITC.
- CITC products are not authorized for use as critical components in life support devices or systems without express written approval of CITC.