



Silicon N-Channel Power MOSFET




CS3N06 AS1-G

General Description:


CS3N06 AS1-G the silicon N-channel Enhanced VDMOSFETs, is obtained by the high density Trench technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. The transistor can be used in various power switching circuit for system miniaturization and higher efficiency. The package form is SOT-26, which accords with the Halogen Free standard.

V _{DSS}	60	V
I _D	3	A
P _D (T _a =25°C)	1.4	W
R _{DS(ON)}	75	mΩ

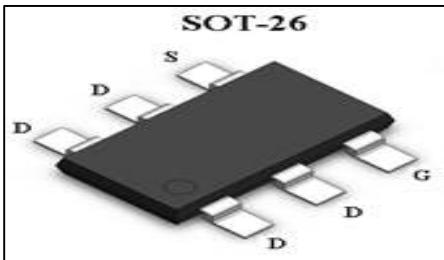

Features:

- | Fast Switching
- | Low ON Resistance (R_{dson}≤100mΩ)
- | Low Gate Charge
- | Low Reverse transfer capacitances
- | 100% Single Pulse avalanche energy Test
- | Halogen Free

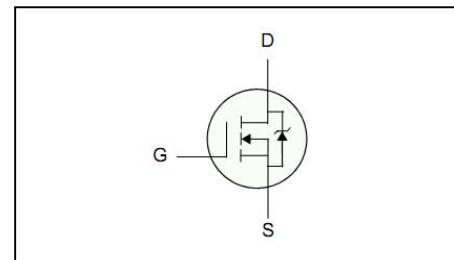

Applications:

Power switch circuit of adaptor and charger.

Absolute (T_A= 25°C unless otherwise specified):

Symbol	Parameter	Rating	Units
V _{DSS}	Drain-to-Source Voltage	60	V
I _D	Continuous Drain Current	3	A
	Continuous Drain Current T _A = 100 °C	1.9	A
I _{DM} ^{a1}	Pulsed Drain Current	12	A
V _{GS}	Gate-to-Source Voltage	±20	V
E _{AS} ^{a2}	Single Pulse Avalanche Energy	11.2	mJ
P _D	Power Dissipation	1.4	W
	Derating Factor above 25°C	0.011	W/°C
T _J , T _{stg}	Operating Junction and Storage Temperature Range	150, -55 to 150	°C

**Electrical Characteristics** ($T_J = 25^\circ\text{C}$ unless otherwise specified):

OFF Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
V_{DSS}	Drain to Source Breakdown Voltage	$V_{GS}=0\text{V}, I_D=250\mu\text{A}$	60	--	--	V
I_{DSS}	Drain to Source Leakage Current	$V_{DS} = 60\text{V}, V_{GS} = 0\text{V}, T_J = 25^\circ\text{C}$	--	--	1	μA
		$V_{DS} = 48\text{V}, V_{GS} = 0\text{V}, T_J = 125^\circ\text{C}$	--	--	100	
$I_{GSS(F)}$	Gate to Source Forward Leakage	$V_{GS} = +20\text{V}$	--	--	100	nA
$I_{GSS(R)}$	Gate to Source Reverse Leakage	$V_{GS} = -20\text{V}$	--	--	-100	nA

ON Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$R_{DS(ON)}$	Drain-to-Source On-Resistance	$V_{GS}=10\text{V}, I_D=3\text{A}$	--	75	100	$\text{m}\Omega$
		$V_{GS}=4.5\text{V}, I_D=2\text{A}$	--	101	125	$\text{m}\Omega$
$V_{GS(\text{TH})}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	0.8	1.3	2	V
Pulse width $t_p \leqslant 300\mu\text{s}, \delta \leqslant 2\%$						

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
R_g	Gate resistance	$V_{GS} = 0\text{V}, V_{DS} = 0\text{V}, f = 1\text{MHz}$	--	2.9	--	Ω
C_{iss}	Input Capacitance	$V_{GS} = 0\text{V}, V_{DS} = 30\text{V}, f = 1.0\text{MHz}$	--	297.6	--	pF
C_{oss}	Output Capacitance		--	25.0	--	
C_{rss}	Reverse Transfer Capacitance		--	17.2	--	

Resistive Switching Characteristics						
Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
$t_{d(\text{ON})}$	Turn-on Delay Time	$V_{GS} = 10\text{V}, R_G = 2\Omega, V_{DD} = 30\text{V}, I_D = 3\text{A}$	--	6.2	--	ns
t_r	Rise Time		--	2.3	--	
$t_{d(\text{OFF})}$	Turn-Off Delay Time		--	15	--	
t_f	Fall Time		--	2.1	--	
Q_g	Total Gate Charge	$I_D = 3\text{A}, V_{DD} = 30\text{V}, V_{GS} = 10\text{V}$	--	6.8	--	nC
Q_{gs}	Gate to Source Charge		--	1.1	--	
Q_{gd}	Gate to Drain ("Miller") Charge		--	1.8	--	

**Source-Drain Diode Characteristics**

Symbol	Parameter	Test Conditions	Rating			Units
			Min.	Typ.	Max.	
I _S	Continuous Source Current (Body Diode)	T _C = 25 °C	--	--	3	A
I _{SM}	Maximum Pulsed Current (Body Diode)		--	--	12	A
V _{SD}	Diode Forward Voltage	I _S =3A, V _{GS} =0V	--	--	1.2	V
t _{rr}	Reverse Recovery Time	di/dt=100A/us I _F =3A	--	29.1	--	ns
Q _{rr}	Reverse Recovery Charge		--	22.7	--	nC
Pulse width t _p ≤ 300μs, δ ≤ 2%						

Symbol	Parameter	Max.	Units
R _{θ JA}	Junction-to-Ambient	89	°C/W






Notes:

^{a1}: Repetitive rating; pulse width limited by maximum junction temperature

^{a2}: L=0.5mH, I_D=6.7A, Start T_J=25 °C

^{a3}: Recommend soldering temperature defined by IPC/JEDEC J-STD 020

Characteristics Curve:

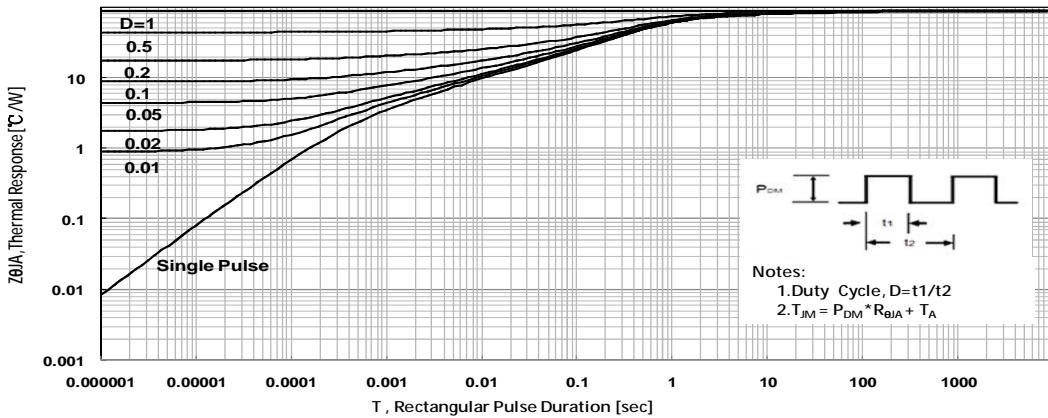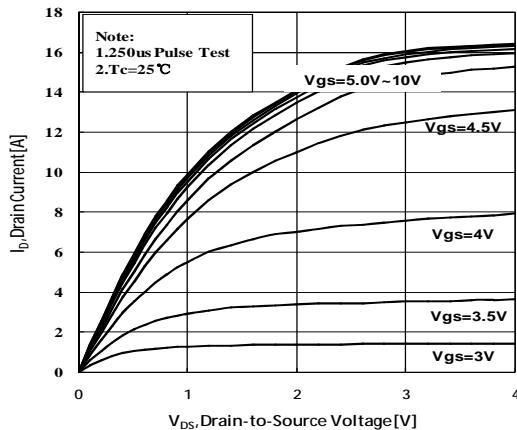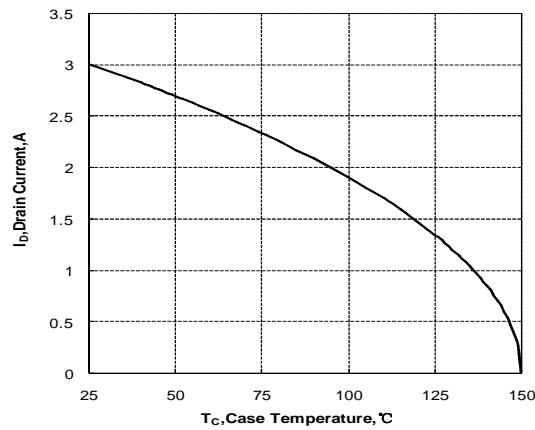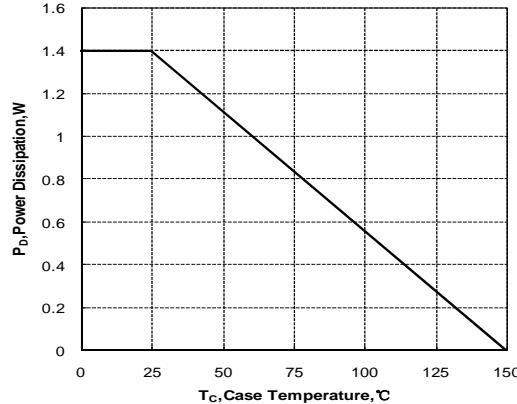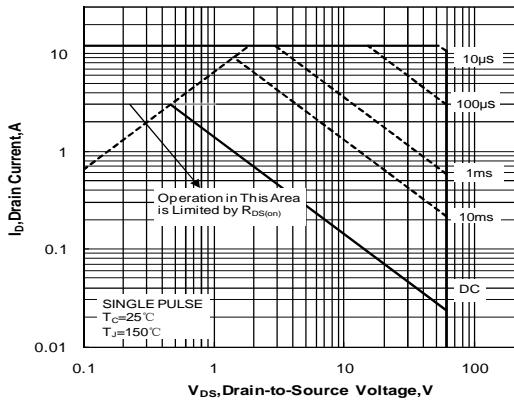

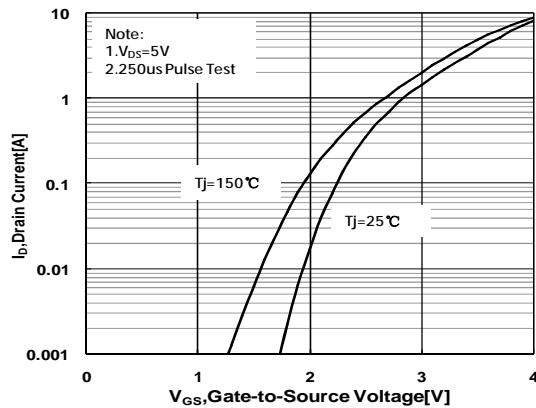


Figure 6 Typical Transfer Characteristics

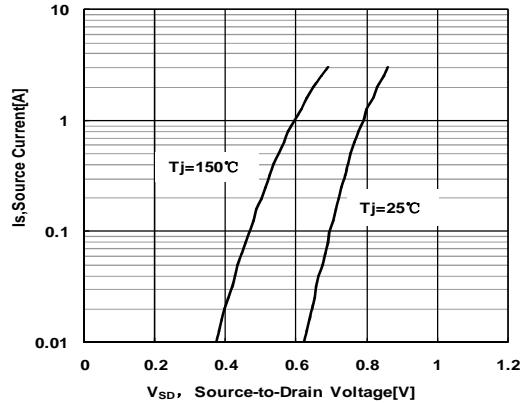


Figure 7 Typical Body Diode Transfer Characteristics

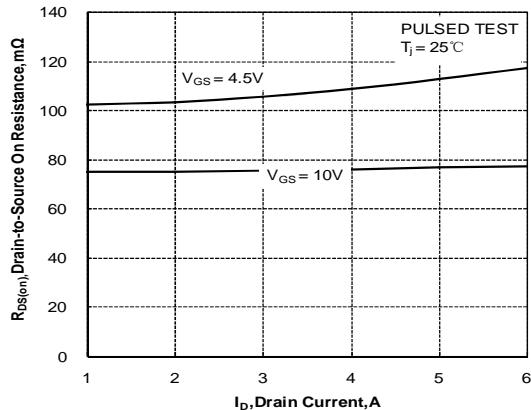


Figure 8. Drain-to-Source On Resistance vs Drain Current

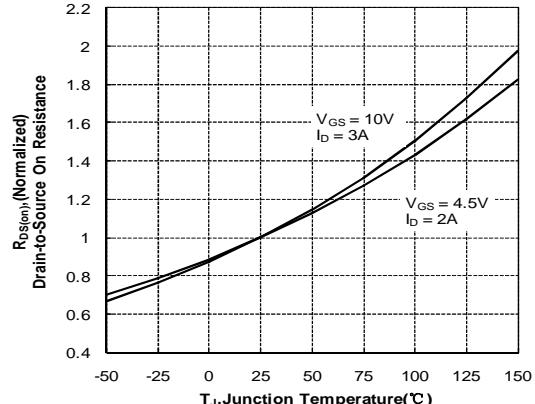


Figure 9. Normalized On Resistance vs Junction Temperature

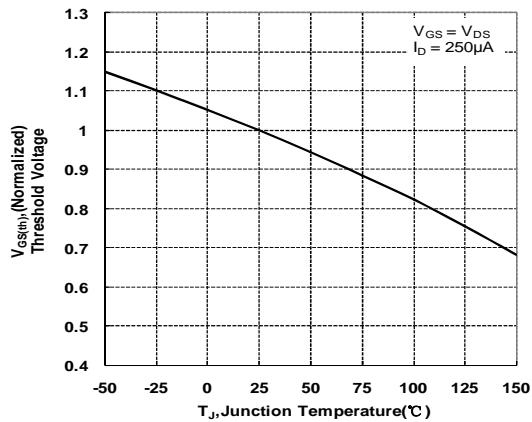


Figure 10. Normalized Threshold Voltage vs Junction Temperature

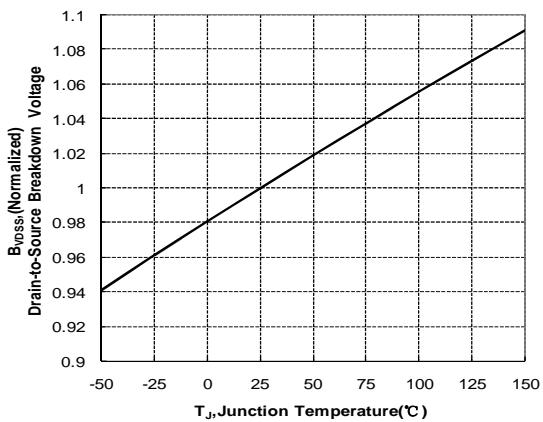


Figure 11. Normalized Breakdown Voltage vs Junction Temperature

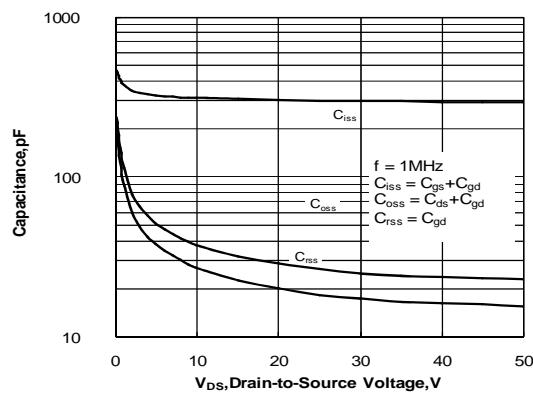


Figure 12. Capacitance Characteristics

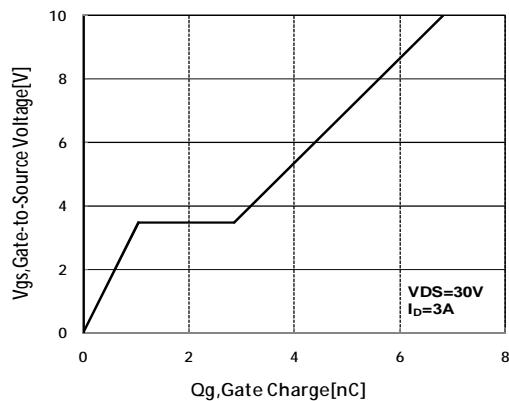
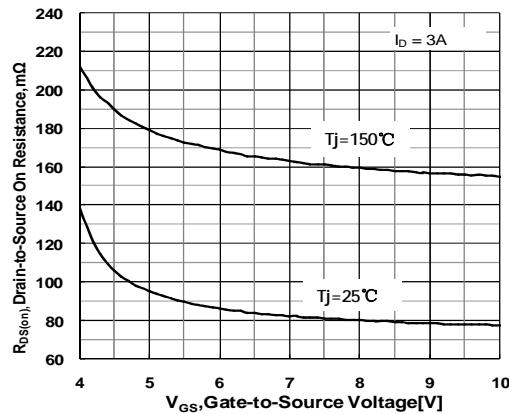


Figure 13 Typical Gate Charge vs Gate to Source Voltage



**Figure 14 Drain-to-Source On Resistance
Gate-to-Source Voltage**

Test Circuit and Waveform:

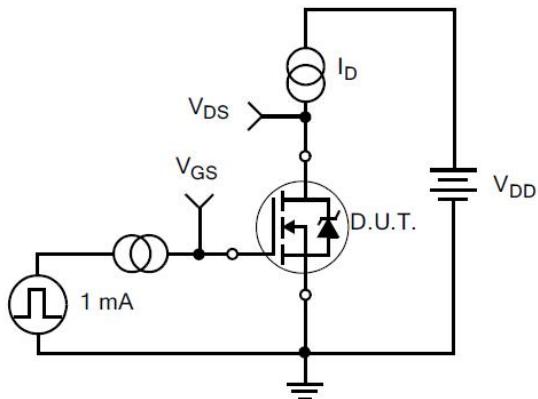


Figure 15. Gate Charge Test Circuit

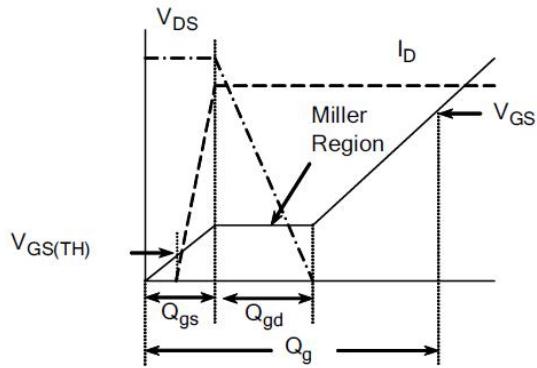


Figure 16. Gate Charge Waveforms

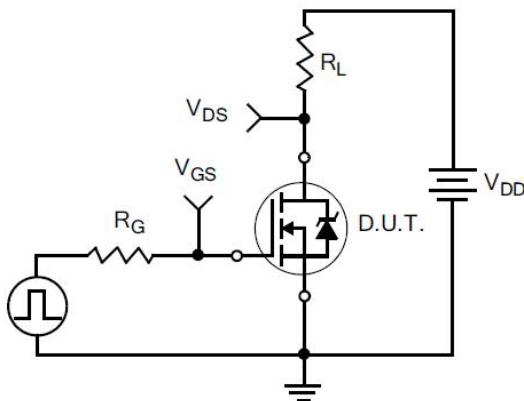


Figure 17. Resistive Switching Test Circuit

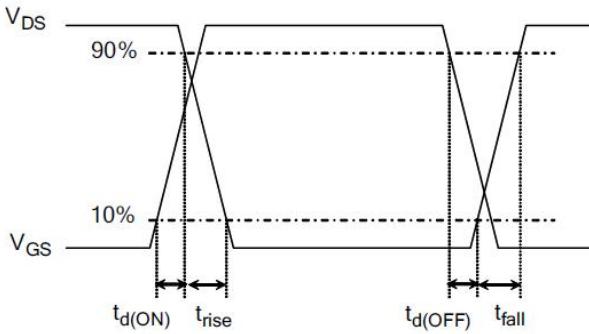


Figure 18. Resistive Switching Waveforms

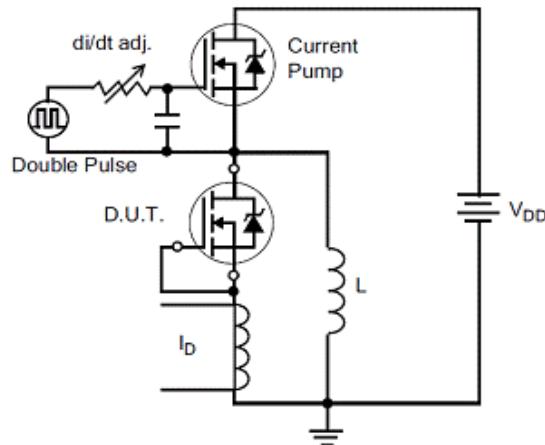


Figure 19. Diode Reverse Recovery Test Circuit

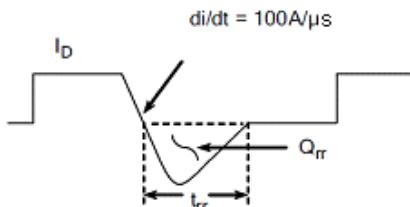


Figure 20. Diode Reverse Recovery Waveform

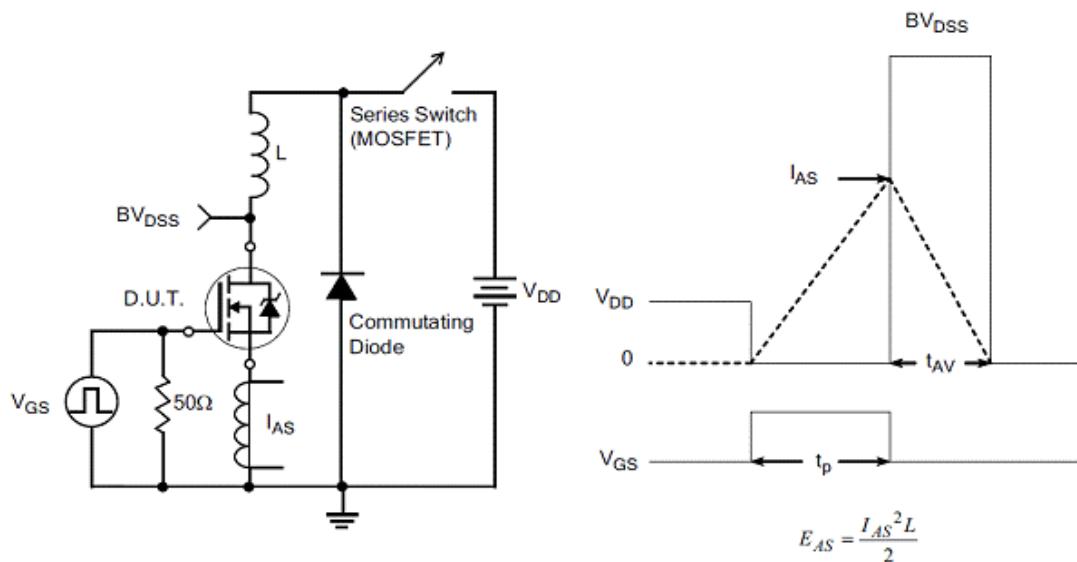
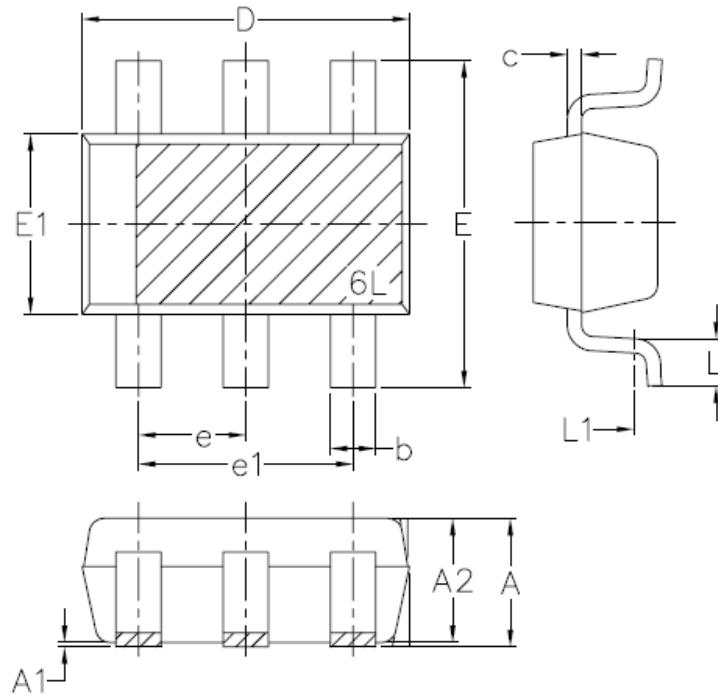


Figure 21. Unclamped Inductive Switching Test Circuit

Figure 22. Unclamped Inductive Switching Waveform

Package Information:

Items	Values(mm)	
	MIN	MAX
A	1.0	1.2
A1	0.01	0.09
A2	0.95	1.15
b	0.3	0.55
c	0.05	0.25
D	2.7	3.1
E	2.5	3.1
E1	1.4	1.8
e	0.85	1.05
e1	1.90 BSC	
L	0.3	0.6
L1	0.25 BSC	

SOT-26 Package

**The name and content of poisonous and harmful material in products**

Part's Name	Hazardous Substance									
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE	DIBP	DEHP	DBP	BBP
Limit	≤0.1%	≤0.1%	≤0.01%	≤0.1%	≤0.1%	≤0.1%	≤0.1%	≤0.1%	≤0.1%	≤0.1%
Lead Frame	○	○	○	○	○	○	○	○	○	○
Molding	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
Wire Bonding	○	○	○	○	○	○	○	○	○	○
Electric glue	○	○	○	○	○	○	○	○	○	○
Note	<p>○: Means the hazardous material is under the criterion of 2011/65/EU. ×: Means the hazardous material exceeds the criterion of 2011/65/EU. The plumbum element of solder exist in products presently, but within the allowed range of Eurogroup's RoHS.</p>									

Warnings

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. It is suggested to be used under 80 percent of the maximum ratings of the device.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. VDMOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. This publication is made by Huajing Microelectronics and subject to regular change without notice.

WUXI CHINA RESOURCES HUAJING MICROELECTRONICS CO., LTD.

Add: No.14 Liangxi RD. Wuxi, Jiangsu, China Mail:214061 <https://www.crmicro.com>
Tel: +86 0510-85807228 Fax: +86- 0510-85800864

Marketing Part: Post: 214061 Tel: +86 0510-81805277/81805336
Fax: +86 0510-85800360/85803016

Application and Service: Post: 214061 Tel / Fax: +86- 0510-81805243/81805110