

用途:用于高效 DC/DC 转换和功率开关。


Purpose: These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.

特点: 低栅电荷, 低反馈电容, 开关速度快。

Features: Low gate charge, low crss, fast switching.

极限参数/Absolute maximum ratings(Ta=25°C)

参数符号 Symbol	数值 Rating	单位 Unit
V _{DSS}	250	V
I _D (T _c =25°C)	8.1	A
I _D (T _c =100°C)	5.1	A
I _{DM}	32.4	A
V _{GSS}	±30	V
E _{AS}	200	mJ
E _{AR}	7.4	mJ
I _{AR}	8.1	A
P _D (T _c =25°C)	38	W
T _J , T _{STG}	-55 to 150	°C






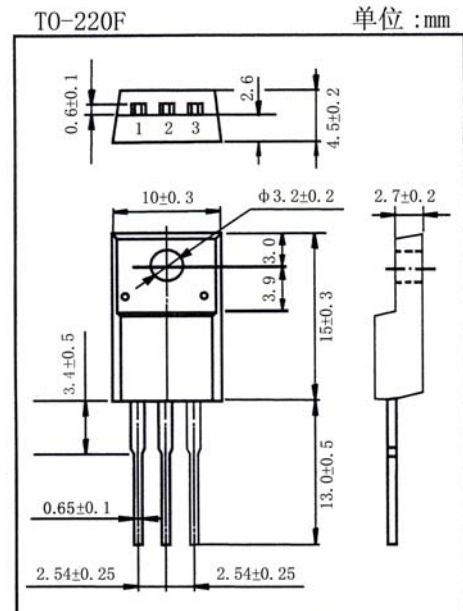


引脚: 1.G 2.D 3.S

电性能参数/Electrical Characteristics(Ta=25°C)


参数符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
BV _{DSS}	V _{GS} =0V I _D =250 μA	250			V
I _{DSS}	V _{DS} =250V V _{GS} =0V			10	μA
	V _{DS} =200V T _c =125°C			100	μA
I _{GSS}	V _{GS} =±30V V _{DS} =0V			±0.1	μA
V _{GS(th)}	V _{DS} =V _{GS} I _D =250 μA	2.0		4.0	V
R _{DS(on)}	V _{GS} =10V I _D =4.05A		0.37	0.45	Ω
g _{FS}	V _{DS} =40V I _D =4.05A		7.5		S
V _{SD}	V _{GS} =0V I _S =8.1A			1.5	V
C _{iss}	V _{DS} =25V V _{GS} =0V f=1.0MHz		735	960	pF
C _{oss}			120	155	pF
C _{rss}			35	45	pF
t _{d(on)}	V _{DD} =125V I _D =8.1A R _G =25 Ω		15	40	ns
t _r			85	180	ns
t _{d(off)}			80	170	ns
t _f			60	130	ns

IRFS634 (CS634F)

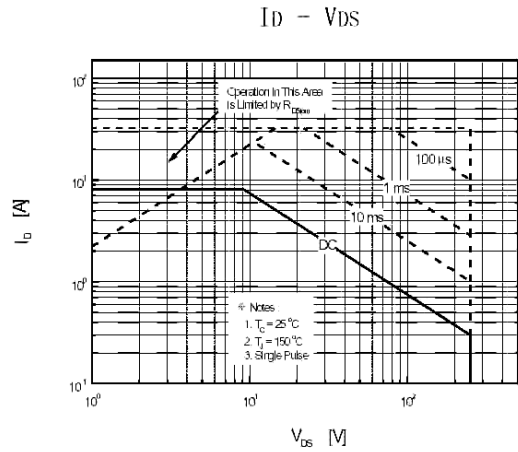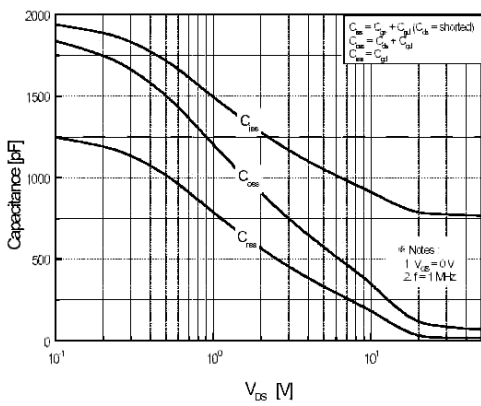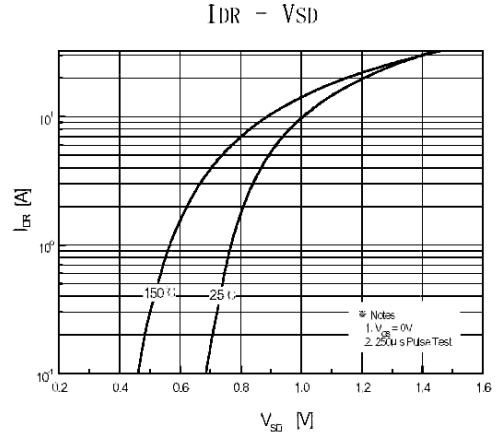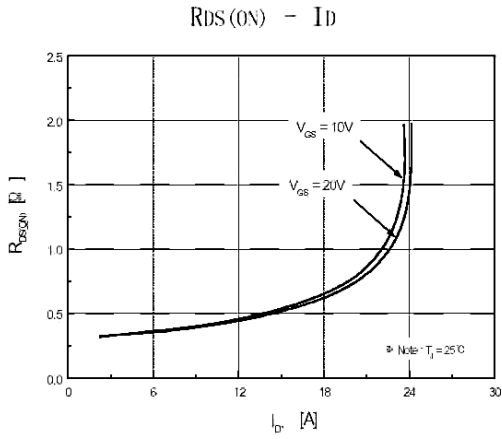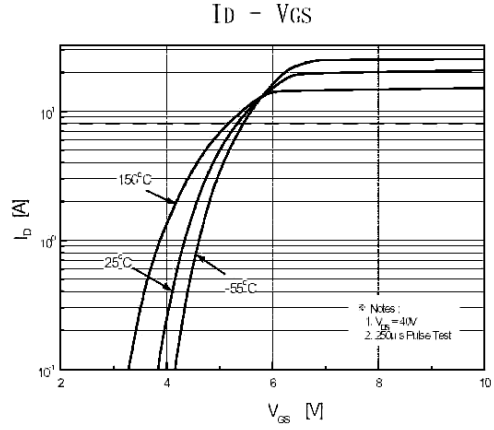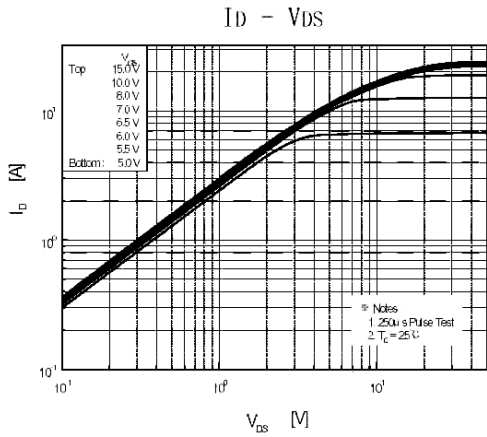


IRFS634 (CS634F)

BVDSS - T_J

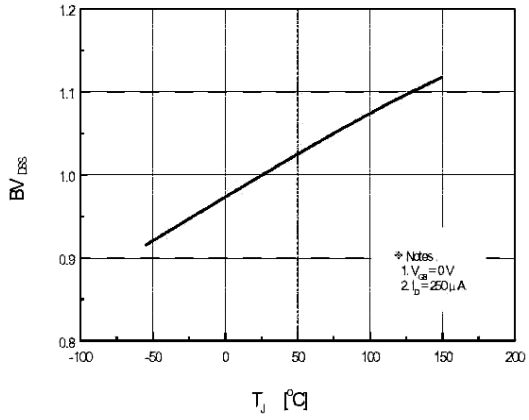

R_{DS(on)} - T_J

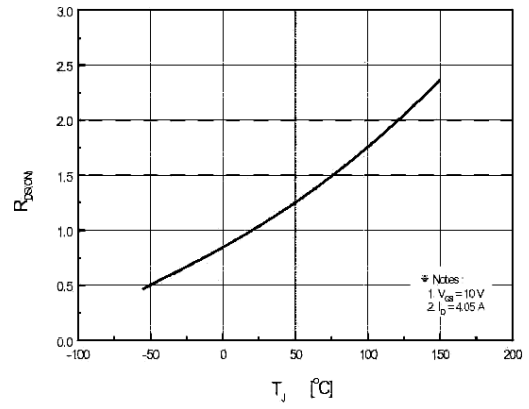

I_D - T_C

