



Spec. No.	PS-DD-S30228/S30229T9
Rev.	A

PRODUCT SPECIFICATION

Model No:CSD-S30228T9/S30229T9

Descriptions:

- 0.3 Inch Dual Digit SMD Display
- Emitting Color : Super Bright Yellow



CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY

CHINA SEMICONDUCTOR CORPORATION

Address:2FL. NO.909,Chung-Cheng Road,
Chung-Ho City Taipei Hsien,Taiwan.

Tel:886-2-2223-9696
Fax:886-2-2223-9377

OPTO PLUS TECHNOLOGIES CO.,LTD

Address:696 Shun jiang Rd.,Ji Shan St.Shaoxing,
ZheJiang,China

Tel:86-0575-88623888
Fax:86-0575-88623112

Model No : CSD-S30228/S30229T9


Features -

1. 0.3 inch (7.62mm) digit height.
2. Qualified according to JEDEC moisture sensitivity Level 2a.
3. RoHS compliant.
4. Low power consumption.
5. Easy mounting on P.C. board.

Device Selection Guide -

Model No.	Chip		Description
	Material	Emitting Color	
CSD-S30228T9	AlGaInP	Super Bright Yellow	Common Anode
CSD-S30229T9	AlGaInP	Super Bright Yellow	Common Cathode



Mechanical Dimensions -

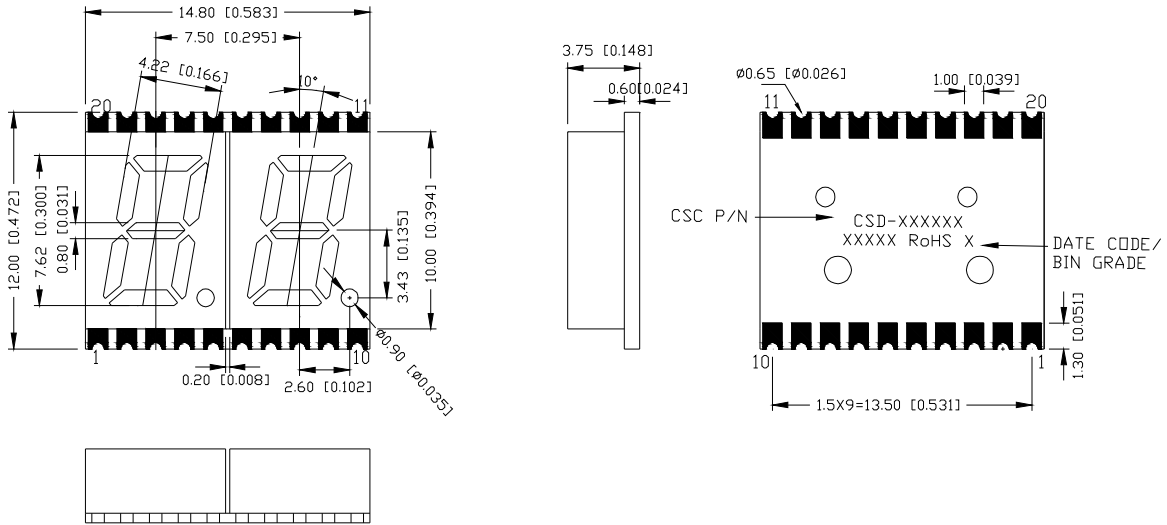

Notes:
All dimensions are in millimeters [inches],
and tolerance is ± 0.25 [0.010]
unless otherwise noted.

Model No : CSD-S30228/S30229T9

Internal Circuit Diagrams -

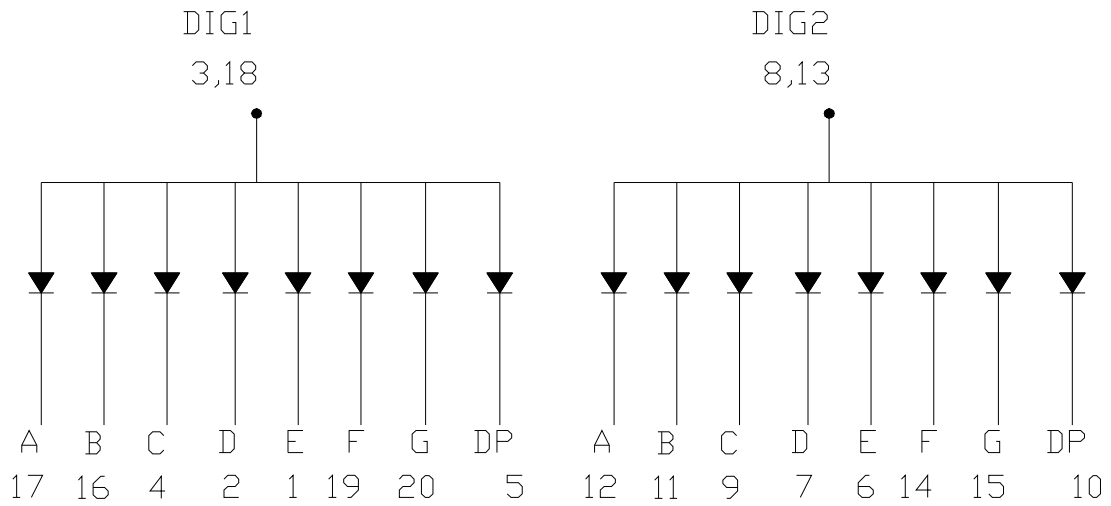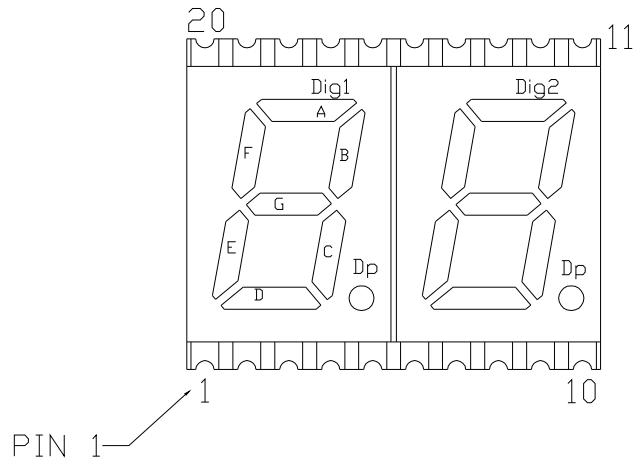

CSD-S30228 Common Anode
(CSD-S30229 Common Cathode)

Model No : CSD-S30228/S30229T9

■ **Absolute Maximum Rating -**

(Ta=25°C)

Parameter	Symbol	Rating	Unit
Power Dissipation Per Dice	PAD	70	mW
Continuous Forward Current Per Dice	IAF	25	mA
Peak Current Per Dice(duty cycle 1/10,1KHz)	IPF	90	mA
Derating Linear From 25°C Per Dice	-	0.33	mA/°C
Reverse Voltage Per Dice	VR	5	V
Operating Temp.	Topr	-40 ~ +105	°C
Storage Temp.	Tstg	-40 ~ +105	°C

Note:Solder temperature 1/16 inch below seating plane for 3 seconds at 260°C

■ **Electro-optical Characteristics -**


(Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Voltage Per Segment	VF	-	2.1	2.8	V	IF=20mA
Luminous Intensity Per Segment	Iv	5	13	-	mcd	IF=10mA
Peak Emission Wavelength	λP	-	590	-	nm	IF=20mA
Spectrum Radiation Bandwidth	$\Delta \lambda$	-	20	-	nm	IF=20mA
Reverse Current	IR	-	-	100	μA	VR=5V
Luminous Intensity Matching Ratio	IV-m	-	-	2:1	-	IF=10mA


Model No : CSD-S30228/S30229T9

Typical Electrical / Optical Characteristics Curves -


(Ta = 25°C Unless Otherwise Noted)

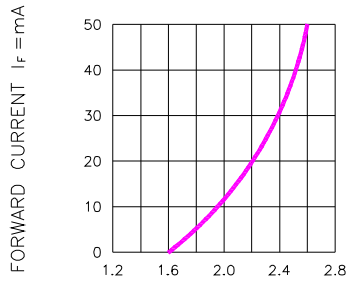


FORWARD VOLTAGE (Vf) -VOLTS
Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

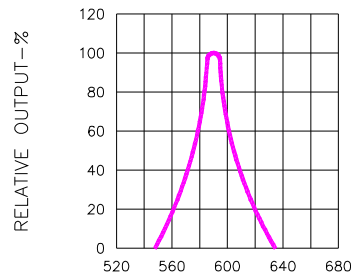


WAVELENGTH (λ) -nm
Fig.2 SPECTRAL RESPONSE

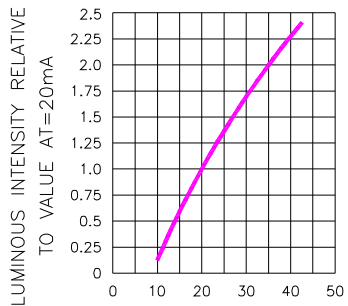


If -FORWARD CURRENT -mA
Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

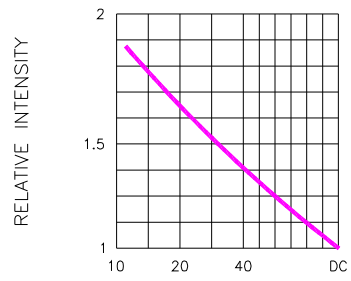

DUTY CYCLE % PER SEGMENT (AVERAGE If = 10mA)
Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

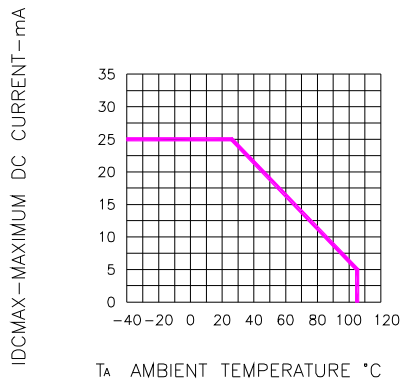

Ta AMBIENT TEMPERATURE °C
Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

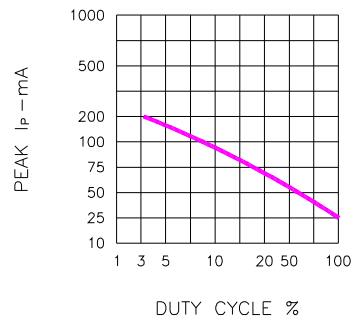


DUTY CYCLE %
Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE f=1 KHz)



Model No : CSD-S30228/S30229T9

SMT REFLOW SOLDERING INSTRUCTIONS


■ IR Reflow Temperature / Time :

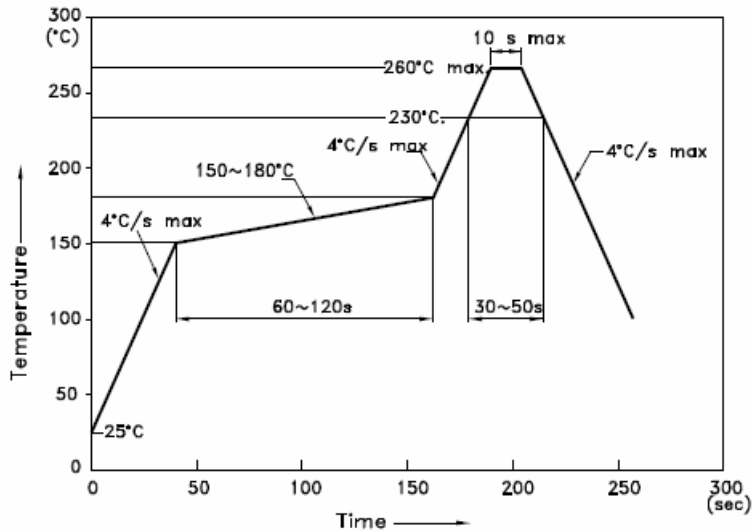

NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

■ Soldering Pad Size

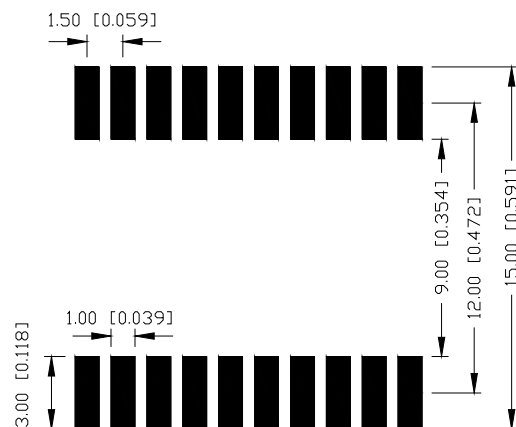




Spec. No.	PS-DD-S30228/S30229T9
Rev.	A

Model No : CSD-S30228/S30229T9

■ REEL DIMENSIONS

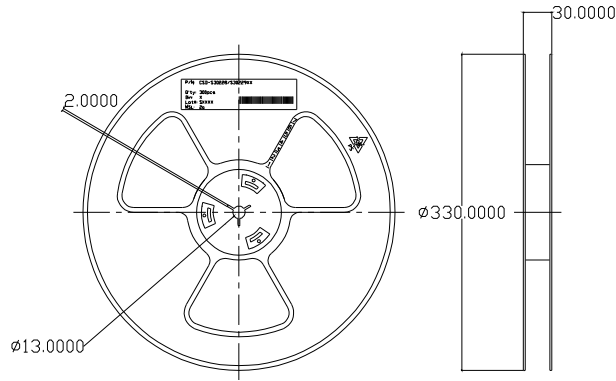

■ PACKING & LABEL SPECIFICATIONS

