

Main Product Characteristics

$I_{F(AV)}$	10A
V_{RRM}	50V
T_J	150°C
$V_{(Typ)}$	0.35V

■ Features

- Low forward voltage drop.
- Excellent high temperature stability.
- Fast switching capability.
- Suffix "G" indicates Halogen-free part, ex.CSP10S50SG-A.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

■ Mechanical data


- Epoxy : UL94-V0 rated flame retardant.
- Case : Molded plastic, TO-277.
- Lead : Solder plated, solderable per MIL-STD-750, Method 2026.
- Polarity: Indicated by cathode band.
- Mounting Position : Any.
- Weight : Approximated 0.093 grams.

■ Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

■ Outline

TO-277

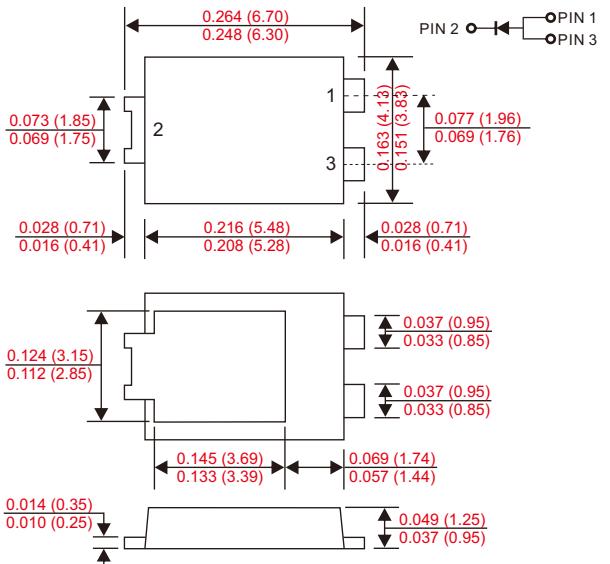

Dimensions in inches and (millimeters)

Parameter	Conditions	Symbol	CSP10S50S-A		UNIT
Marking code			CSP10S50S		
Peak repetitive reverse voltage		V_{RRM}			
Working peak reverse voltage		V_{RWM}	50		V
DC blocking voltage		V_{RM}			
Forward rectified current		I_o	10		A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I_{FSM}	280		A
Thermal resistance	Junction to case	$R_{\theta JC}$	4		°C/W
Operating and Storage temperature		T_J, T_{STG}	-55 ~ +150		°C

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Reverse breakdown voltage	$I_R = 0.5mA$	$V_{(BR)R}$	50			V
Forward voltage drop	$I_F = 10A, T_J = 25°C$	V_F			470	mV
	$I_F = 10A, T_J = 125°C$			350	410	
Reverse current	$V_R = V_{RRM}, T_J = 25°C$	I_R			0.3	mA
	$V_R = V_{RRM}, T_J = 100°C$				15	
	$V_R = V_{RRM}, T_J = 150°C$				75	

Note : 1.FR-4 PCB, 2oz.Copper.

2.Polyimide PCB, 2oz.Copper.Cathode pad dimensions 18.8mm x 14.4mm.Anode pad dimensions 5.6mm x 14.4mm.

■ Rating and characteristic curves

Fig. 1 - Forward Power Dissipation

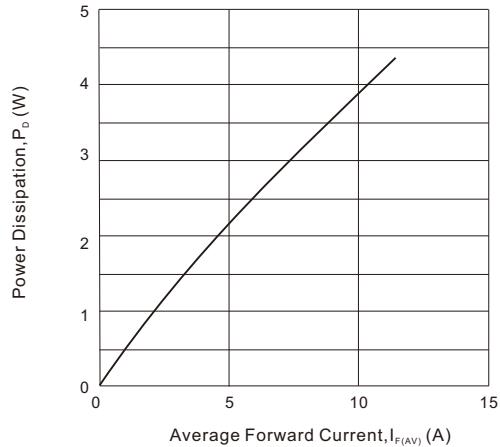


Fig. 2 - Instantaneous Forward Characteristics

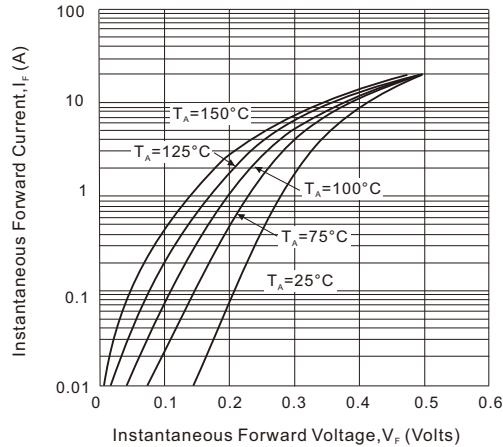


Fig. 3 - Reverse Characteristics

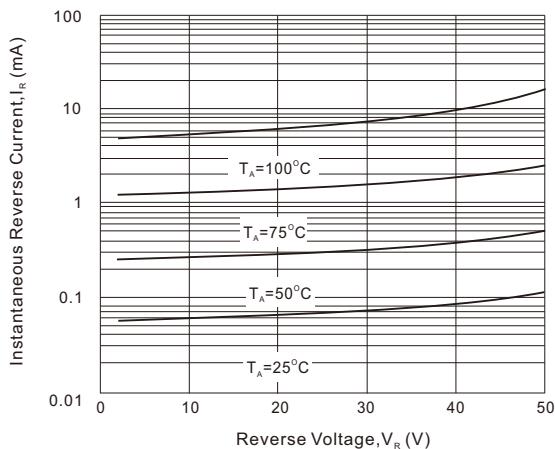


Fig. 4 - Forward Current Derating Curve

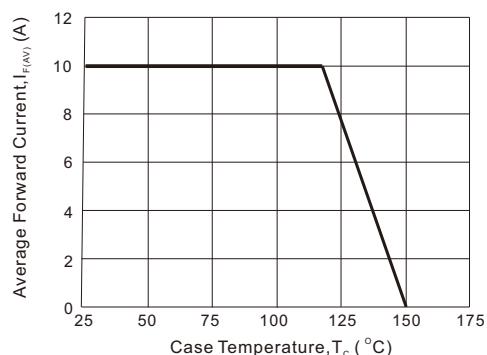


Fig. 5 - Total Capacitance VS. Reverse Voltage



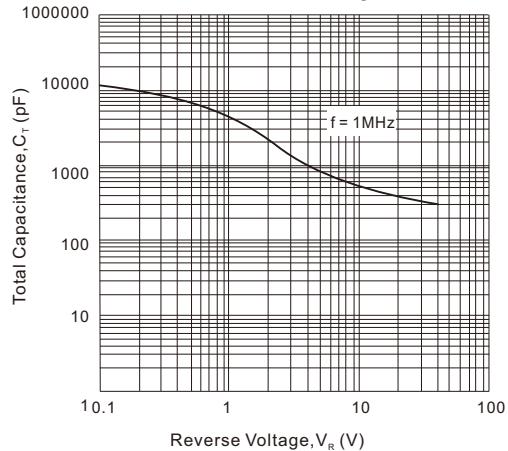


Fig. 6 - Maximum Avalanche Power Curve

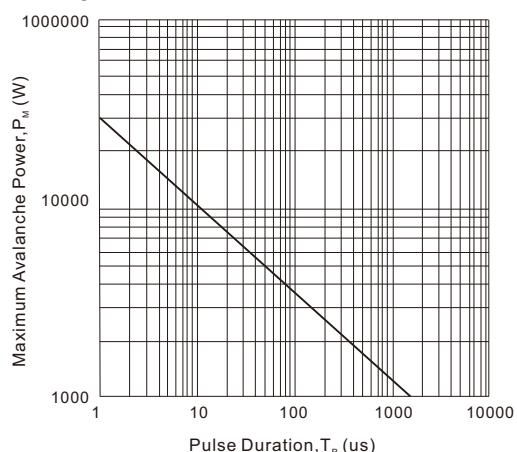

■ TO-277 foot print

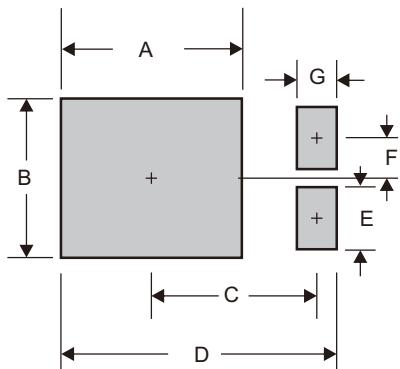

A	B	C	D	E	F	G
0.185 (4.70)	0.142 (3.60)	0.152 (3.87)	0.260 (6.60)	0.055 (1.40)	0.035 (0.90)	0.031 (0.80)

Dimensions in inches and (millimeters)

- CITC reserves the right to make changes to this document and its products and specifications at any time without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- CITC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CITC assume any liability for application assistance or customer product design.
- CITC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of CITC.
- CITC products are not authorized for use as critical components in life support devices or systems without express written approval of CITC.