

SPECIFICATIONS

Electrical Ratings	50mA @ 48VDC
Electrical Life	100,000 cycles typical
Contact Resistance	< 50 mΩ initial
Actuation Force	180 +/- 50gF
Actuator Travel	.25 +/- .1mm
Dielectric Strength	1000Vrms min
Insulation Resistance	> 100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C




MATERIALS ←RoHS COMPLIANT

Actuator	6/6 Nylon
Housing	6/6 Nylon
Cover	Stainless Steel
Contacts	Stainless Steel, Silver Plated
Terminals	Brass, Silver Plated


ORDERING INFORMATION

1. Series:	CT1101	4.3
CT1101		
CT1101L		
2. Actuator Length "L" (mm):		
4.3		
5.0		





DIMENSIONS



www.DataSheet4U.com

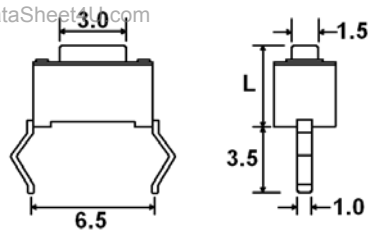

Part Number	"L" (mm)
CT11014.3	4.3
CT11015.0	5.0

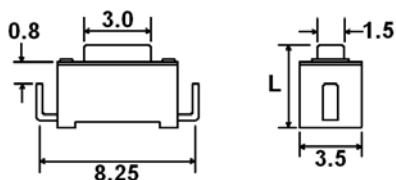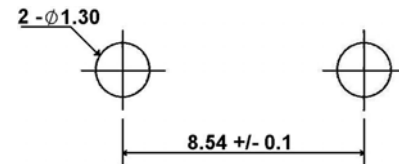

Part Number	"L" (mm)
CT1101L4.3	4.3
CT1101L5.0	5.0

