



# CT3010-5L, CT3011-5L, CT3012-5L CT3020-5L, CT3021-5L, CT3022-5L, CT3023-5L 250V/400V Random Phase 5-Pin Phototriac Optocoupler

## Features

- High isolation 5000 VRMS
- Peak Breakdown Voltage
  - 250V – CT3010-5L,CT3011-5L,CT3012-5L
  - 400V – CT3020-5L,3021-5L,3022-5L,3023-5L
- Temperature range - 55 °C to 100 °C
- Regulatory Approvals
  - UL - UL1577 (E364000)
  - VDE - EN60747-5-5(VDE0884-5)
  - CQC – GB4943.1, GB8898
  - IEC60065, IEC60950


## Description

The CT3010-5L, CT3011-5L, CT3012-5L, CT3020-5L, CT3021-5L, CT3022-5L and CT3023-5L consists of a Random Phase Photo Triac optically coupled to a gallium arsenide Infrared-emitting diode in a 5-lead DIP package.

## Applications


- Motor Controls
- Lamp ballasts
- Static AC Power Switch
- Solenoid/ Valve Control

## Package Outline

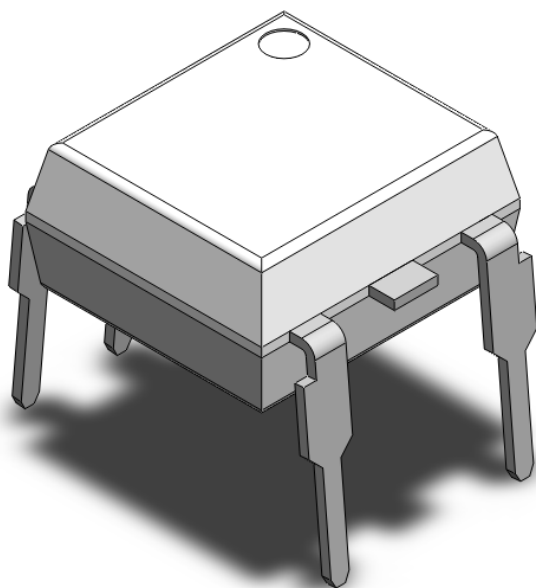

Note: Different lead forming options available. See package dimension.

## Schematic

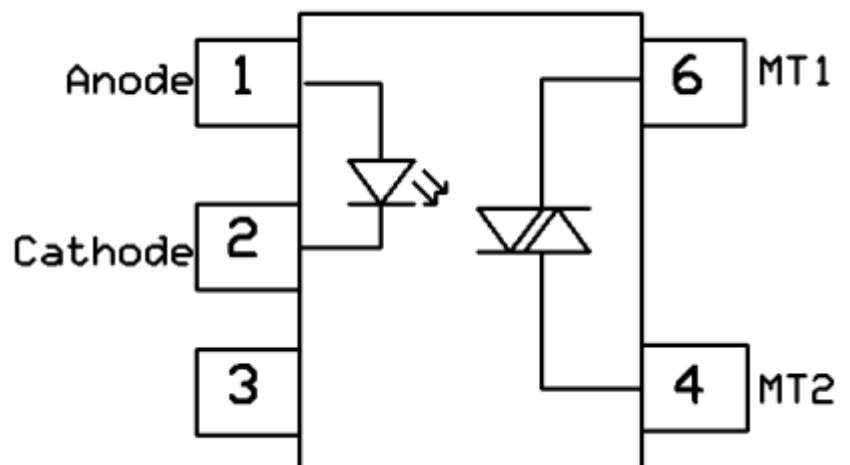



**CT3010-5L, CT3011-5L, CT3012-5L**  
**CT3020-5L, CT3021-5L, CT3022-5L, CT3023-5L**  
**250V/400V Random Phase 5-Pin Phototriac Optocoupler**

**Absolute Maximum Rating at 25°C**

<b>Symbol</b>	<b>Parameters</b>		<b>Ratings</b>	<b>Units</b>	<b>Notes</b>
V <sub>ISO</sub>	Isolation voltage		5000	V <sub>RMS</sub>	
T <sub>OPR</sub>	Operating temperature		-55 ~ +100	°C	
T <sub>STG</sub>	Storage temperature		-55 ~ +150	°C	
T <sub>SOL</sub>	Soldering temperature		260	°C	
<b>Emitter</b>					
I <sub>F</sub>	Forward current		60	mA	
I <sub>F(TRANS)</sub>	Peak transient current (≤1μs P.W,300pps)		1	A	
V <sub>R</sub>	Reverse voltage		6	V	
P <sub>D</sub>	Power dissipation		100	mW	
<b>Detector</b>					
P <sub>D</sub>	Power dissipation		300	mW	
V <sub>DRM</sub>	Off-State Output	CT3010-5L,3012-5L,3022-5L	250	V	
	Terminal Voltage	CT3020-5L,3021-5L,3022-5L,3023-5L	400	V	
I <sub>TSM</sub>	Peak Repetitive Surge Current		1	A	



# CT3010-5L, CT3011-5L, CT3012-5L CT3020-5L, CT3021-5L, CT3022-5L, CT3023-5L 250V/400V Random Phase 5-Pin Phototriac Optocoupler

## Electrical Characteristics $T_A = 25^\circ\text{C}$ (unless otherwise specified)

### Emitter Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
$V_F$	Forward voltage	$I_F=10\text{mA}$	-	-	1.5	V	
$I_R$	Reverse Current	$V_R = 6\text{V}$	-	-	5	$\mu\text{A}$	
$C_{IN}$	Input Capacitance	$f= 1\text{MHz}$	-	45	-	pF	

### Detector Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
$I_{DRM}$	Peak Blocking Current	$I_F = 0\text{mA}$ , $V_{DRM} = \text{Rated } V_{DRM}$	-	-	100	nA	
$V_{TM}$	Peak On-State Voltage	$I_F = \text{Rated } I_{FT}$ , $I_{TM} = 100\text{mA}$	-	-	2.5	V	
dv/dt	Critical Rate of Rise off-State Voltage	$V_{PEAK} = \text{Rated } V_{DRM}$	-	100	-	$\text{V}/\mu\text{s}$	

### Transfer Characteristics

Symbol	Parameters	Test Conditions	Min	Typ	Max	Units	Notes
$I_{FT}$	Input Trigger Current	CT3020-5L	-	-	30	mA	
		CT3010-5L, CT3021-5L	-	-	15		
		CT3011-5L, CT3022-5L	-	-	10		
		CT3012-5L, CT3023-5L	-	-	5		
		Terminal Voltage = 3V	-	-	-		
$I_H$	Holding Current		-	250	-	$\mu\text{A}$	
$R_{IO}$	Isolation Resistance	$V_{IO} = 500\text{V}_{DC}$	$1 \times 10^{11}$	-	-		
$C_{IO}$	Isolation Capacitance	$f = 1\text{MHz}$	-	0.25	-	pF	



# CT3010-5L, CT3011-5L, CT3012-5L CT3020-5L, CT3021-5L, CT3022-5L, CT3023-5L 250V/400V Random Phase 5-Pin Phototriac Optocoupler

## Typical Characteristic Curve

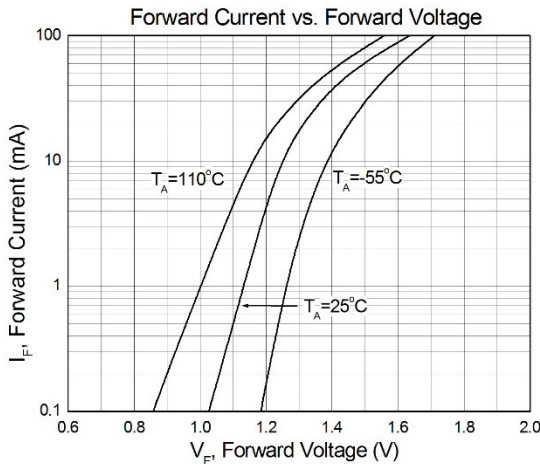


Figure 1

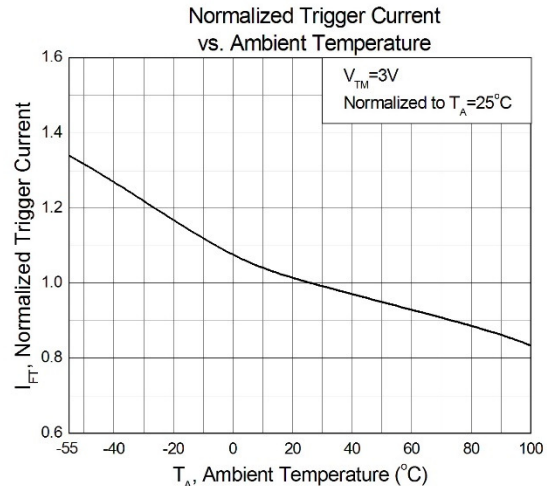


Figure 2

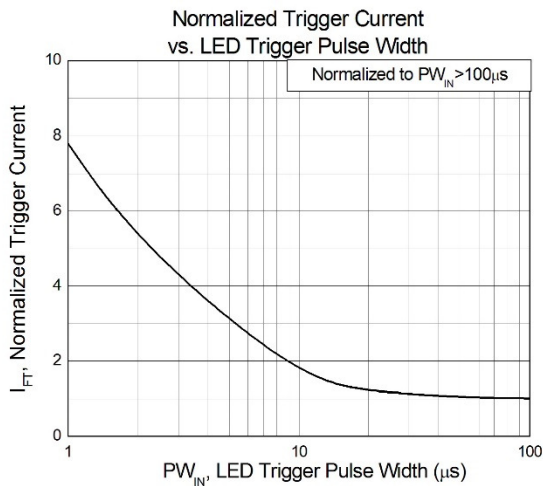


Figure 3

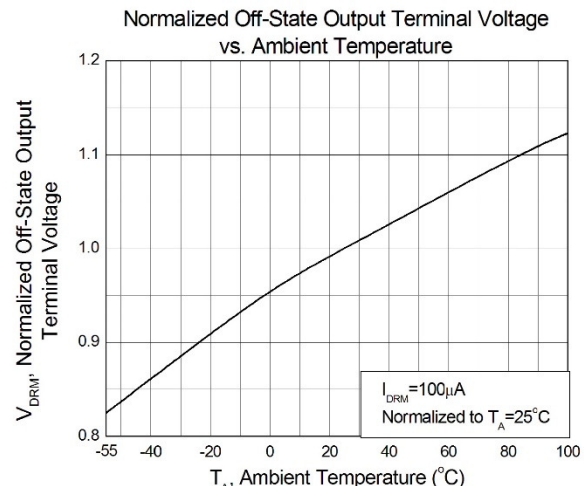


Figure 4

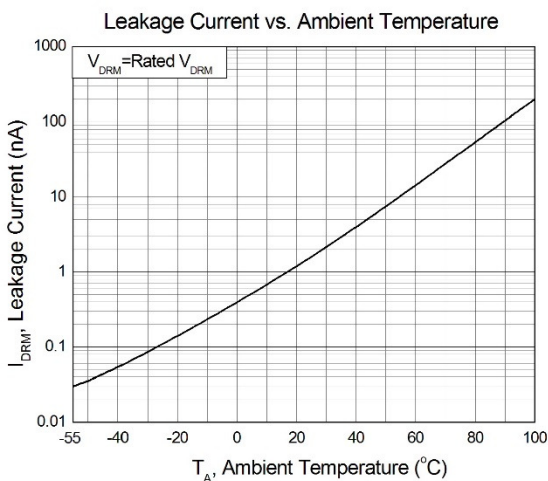


Figure 5


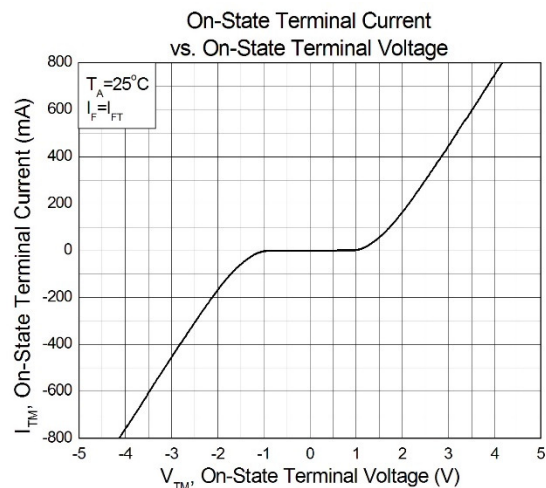


Figure 6




# CT3010-5L, CT3011-5L, CT3012-5L CT3020-5L, CT3021-5L, CT3022-5L, CT3023-5L 250V/400V Random Phase 5-Pin Phototriac Optocoupler

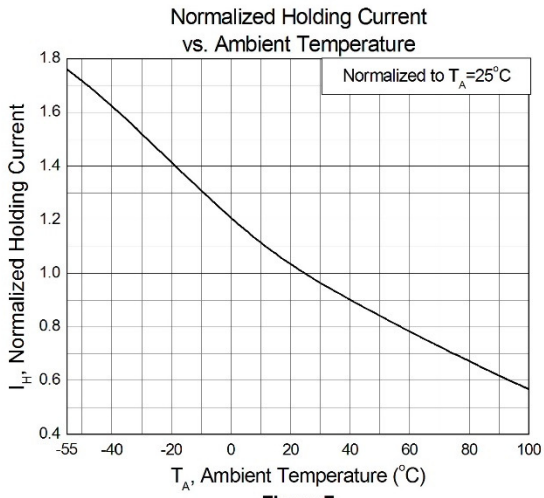

## Package Dimension *Dimensions in mm unless otherwise stated*

### Standard DIP – Through Hole

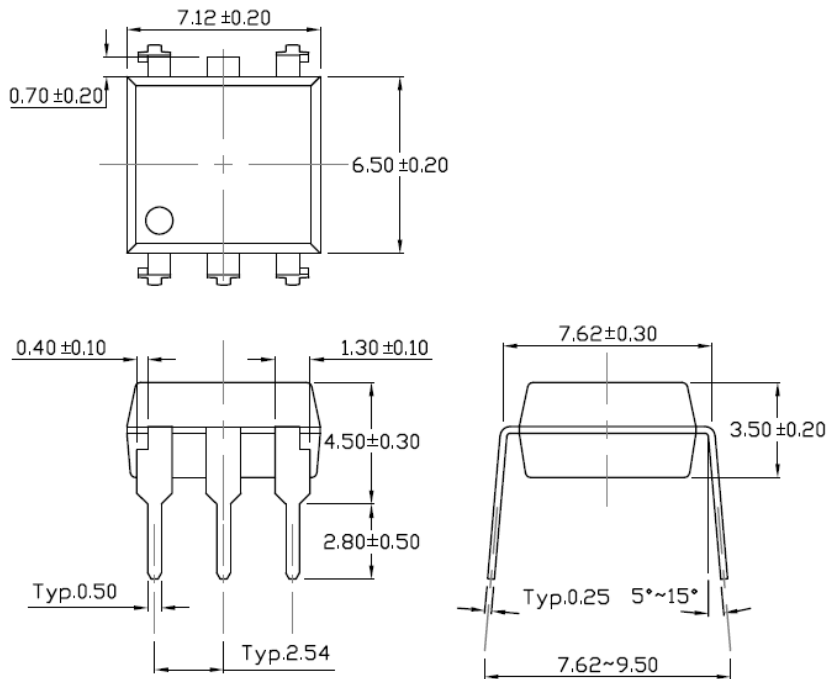




**CT3010-5L, CT3011-5L, CT3012-5L  
CT3020-5L, CT3021-5L, CT3022-5L, CT3023-5L  
250V/400V Random Phase 5-Pin Phototriac Optocoupler**

---

### Marking Information

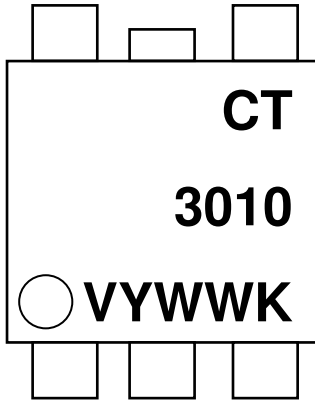

**Note:**

- CT : Denotes “CT Micro”
- 3010 : Part Number
- V : VDE Option
- Y : Fiscal Year
- WW : Work Week
- K : Manufacturing Code

### Ordering Information

CT301X-5L-G, CT302X-5L-G

X = Part No. (CT301X:0,1,2), (CT302X : 0,1,2,3)


G= Material option (G: Green, None: Non-green)

<b>Option</b>	<b>Description</b>	<b>Quantity</b>
None	Standard 5 Pin Dip	50Units/Tube



**CT3010-5L, CT3011-5L, CT3012-5L**  
**CT3020-5L, CT3021-5L, CT3022-5L, CT3023-5L**  
**250V/400V Random Phase 5-Pin Phototriac Optocoupler**

**Reflow Profile**

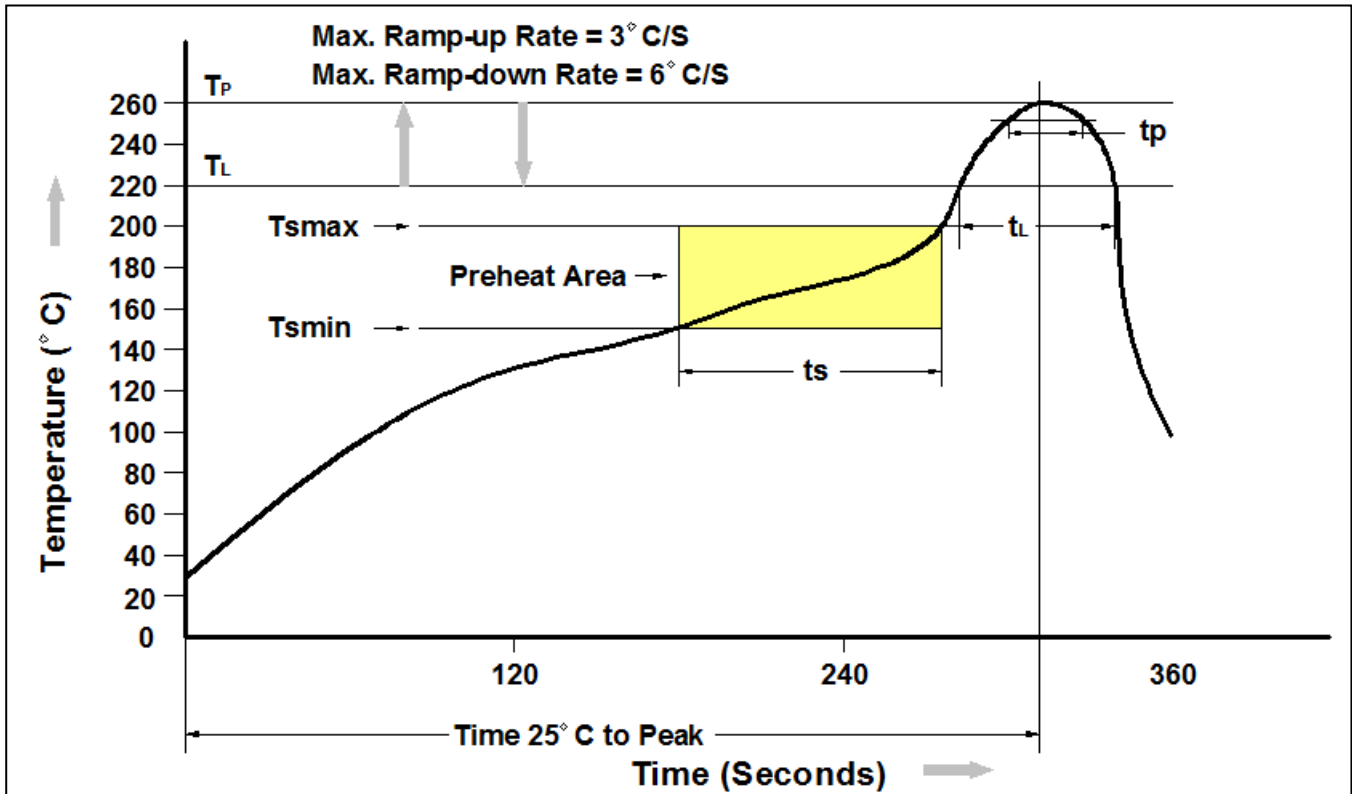

Profile Feature	Pb-Free Assembly Profile
Temperature Min. (Tsmmin)	150 °C
Temperature Max. (Tsmmax)	200 °C
Time (ts) from (Tsmmin to Tsmmax)	60-120 seconds
Ramp-up Rate (tL to tP)	3°C/second max.
Liquidous Temperature (TL)	217 °C
Time (tL) Maintained Above (TL)	60 – 150 seconds
Peak Body Package Temperature	260 °C +0 °C / -5 °C
Time (tP) within 5 °C of 260 °C	30 seconds
Ramp-down Rate (TP to TL)	6°C/second max
Time 25 °C to Peak Temperature	8 minutes max.



**CT3010-5L, CT3011-5L, CT3012-5L  
CT3020-5L, CT3021-5L, CT3022-5L, CT3023-5L  
250V/400V Random Phase 5-Pin Phototriac Optocoupler**

---

**DISCLAIMER**

**CT MICRO RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. CT MICRO DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.**

---

**DISCOLORATION MIGHT OCCUR ON THE PACKAGE SURFACE AFTER SOLDERING, REFLOW OR LONG TERM USE. THIS DOES NOT IMPACT THE PRODUCT PERFORMANCE NOR THE PRODUCT RELIABILITY.**

---

**CT MICRO ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT EXPRESS WRITTEN APPROVAL OF CT MICRO INTERNATIONAL CORPORATION.**

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instruction for use provided in the labelling, can be reasonably expected to result in significant injury to the user.*
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.*