


Wet Tantalum Capacitors with Glass to Tantalum Hermetic Seal, Sintered Anode TANTALEX[®] Capacitors

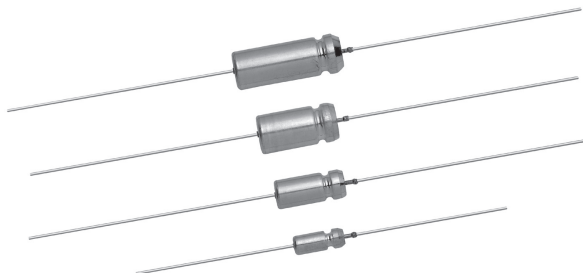

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55°C to + 85°C and with voltage derating to two-thirds the + 85°C rating at + 125°C. Capable of + 175°C operation at reduced voltage. Use of Type 135D capacitors for high temperature applications is recommended.

Capacitance Tolerance: At 120 Hz, + 25°C. $\pm 20\%$ standard. $\pm 10\%$, $\pm 5\%$ available as special.

DC Leakage Current (DCL Max.):

At + 25°C, + 85°C and + 125°C: Leakage current shall not exceed the values listed in the Standard Ratings Tables.

Life Test: Capacitors are capable of withstanding a 2000 hour life test at a temperature of + 85°C or + 125°C at the applicable rated DC working voltage.

FEATURES

- Hermetic glass to tantalum seal
- High CV per unit volume
- Extremely low leakage current
- Wide temperature range: - 55 to + 175°C
- Improved reliability through the use of a glass-to- tantalum true hermetic anode seal is the prime feature of the 738D and CT9 sintered anode TANTALEX[®] capacitor. This construction eliminates all internal lead welds while retaining the strength of internal lead-welded parts.
- The construction offers outstanding resistance to thermal shock.

APPROVALS

- CECC 30202-004 CT9 style


ORDERING INFORMATION

CT9 738D MODEL	226 CAPACITANCE	X0 CAPACITANCE TOLERANCE	100 DC VOLTAGE RATING AT + 85°C	B CASE CODE	2 STYLE NUMBER
	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	X0 = $\pm 20\%$ X9 = $\pm 10\%$ X5 = $\pm 5\%$ Special Order.	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 volts).	See Ratings and Case Codes Table.	0 = Bare case. 2 = Outer plastic film insulation. 6 = High temperature film insulation (above + 125°C).

Packaging: The use of formed plastic trays for packaging these axial lead components is standard. Tape and reel is not recommended due to the unit weight.

Wet Tantalum Capacitors
with Glass to Tantalum Hermetic Seal,
Sintered Anode TANTALEX[®] Capacitors

Vishay Tansitor

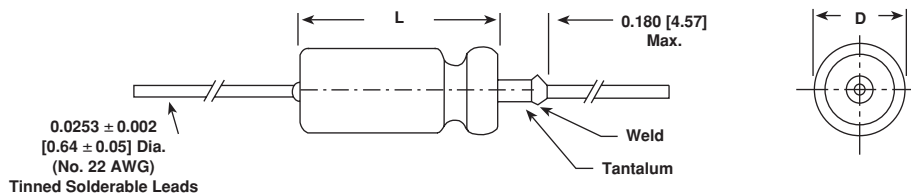DIMENSIONS in inches [millimeters]

CASE CODE	BARE CASE		WITH OUTER PLASTIC - FILM INSULATION		LEAD LENGTH	Max. WEIGHT (Ounces/Grams)
	D	L	D (Max.)	L (Max.)		
A	0.187 ± 0.015 [4.75 ± 0.38]	0.453 + 0.031 - 0.015 [11.51 + 0.79 - 0.38]	0.219 [5.56]	0.515 [13.08]	1.500 ± 0.250 [38.10 ± 6.35]	0.07 [2.0]
B	0.281 ± 0.015 [7.14 ± 0.38]	0.641 + 0.031 - 0.015 [16.28 + 0.79 - 0.38]	0.312 [7.92]	0.704 [17.88]	2.250 ± 0.250 [57.15 ± 6.35]	0.18 [5.1]
C	0.375 ± 0.015 [9.53 ± 0.38]	0.765 + 0.031 - 0.015 [19.43 + 0.79 - 0.38]	0.406 [10.31]	0.828 [21.03]	2.250 ± 0.250 [57.15 ± 6.35]	0.36 [10.2]
D	0.375 ± 0.015 [9.53 ± 0.38]	1.063 + 0.031 - 0.015 [27.00 + 0.79 - 0.38]	0.406 [10.31]	1.126 [28.60]	2.250 ± 0.250 [57.15 ± 6.35]	0.49 [13.9]

738D STANDARD RATINGS

CAPACITANCE (μF)	CASE CODE	PART NUMBER*	Max. DF at + 20°C (%)	Max. IMP. at - 55°C 100 KHz (Ohms)	Max. IMP. at + 20°C 100 KHz (Ohms)	Max. DCL (μA) at		Max. CAPACITANCE CHANGE (%) at		
						+ 20°C	+ 85°C + 125°C	- 55°C	+ 85°C	+ 125°C
6.3 VDC at + 85°C, 4 VDC at + 125°C, 3 VDC at + 175°C										
68	A	738D686X06R3A2	17.1	10	1.0	1	2	-40	+10.5	+17.5
270	B	738D277X06R3B2	67.8	10	1.0	1	7	-44	+17.5	+20
560	C	738D567X06R3C2	151.9	10	1.0	2	13	-64	+17.5	+20
1000	D	738D108X06R3D2	100.5	10	1.0	3	14	-80	+25	+25
1200	D	738D128X06R3D2	120.6	10	1.0	3	14	-80	+25	+25
8 VDC at + 85°C, 5 VDC at + 125°C, 4 VDC at + 175°C										
56	A	738D566X0008A2	14.1	10	1.0	1	2	-40	+10.5	+16
220	B	738D227X0008B2	55.2	10	1.0	1	7	-44	+17.5	+20
470	C	738D477X0008C2	82.6	10	1.0	2	14	-64	+17.5	+20
820	D	738D827X0008D2	51.5	10	1.0	4	16	-80	+25	+25
10 VDC at + 85°C, 6.3 VDC at + 125°C, 5 VDC at + 175°C										
39	A	738D396X0010A2	15.1	10	1.0	1	2	-36	+12	+16
47	A	738D476X0010A2	15.1	10	1.0	1	2	-36	+14	+16
150	B	738D157X0010B2	28.2	10	1.0	1	6	-36	+14	+16
180	B	738D187X0010B2	45.2	10	1.0	1	7	-36	+14	+16
330	C	738D337X0010C2	51.9	10	1.0	2	16	-60	+17.5	+20
390	C	738D397X0010C2	73.5	10	1.0	2	16	-64	+17.5	+20
680	D	738D687X0010D2	42.7	10	1.0	4	16	-80	+25	+25
16 VDC at + 85°C, 10 VDC at + 125°C, 8 VDC at + 175°C										
27	A	738D276X0016A2	10.3	10	1.0	1	2	-28	+10.5	+16
33	A	738D336X0016A2	10.3	10	1.0	1	2	-28	+14	+16
120	B	738D127X0016B2	30.2	10	1.0	1	7	-28	+17.5	+20
220	C	738D227X0016C2	34.5	10	1.0	2	16	-50	+17.5	+18
270	C	738D277X0016C2	50.8	10	1.0	2	16	-56	+17.5	+20
470	D	738D477X0016D2	35.4	10	1.0	6	24	-80	+25	+25
560	D	738D567X0016D2	42.2	10	1.0	6	24	-80	+25	+25

738D, CT9 (CECC 30202-004)

Vishay Tansitor

Wet Tantalum Capacitors
with Glass to Tantalum Hermetic Seal,
Sintered Anode TANTALEX[®] Capacitors

738D STANDARD RATINGS

CAPACITANCE (μF)	CASE CODE	PART NUMBER*	Max. DF at + 20°C (%)	Max. IMP. at - 55°C 100 KHz (Ohms)	Max. IMP. at + 20°C 100 KHz (Ohms)	Max. DCL (μA) at		Max. CAPACITANCE CHANGE (%) at		
						+ 20°C	+ 85°C	- 55°C	+ 85°C	+ 125°C
25 VDC at + 85°C, 16 VDC at + 125°C, 13 VDC at + 175°C										
18	A	738D186X0025A2	6.9	10	1.0	1	2	-20	+10.5	+12
22	A	738D226X0025A2	6.9	10	1.0	1	2	-20	+10.5	+12
82	B	738D826X0025B2	20.6	10	1.0	1	10	-28	+13	+15
100	B	738D107X0025B2	25.1	10	1.0	1	10	-28	+13	+15
180	C	738D187X0025C2	42.2	10	1.0	2	18	-48	+13	+15
330	D	738D337X0025D2	27.2	10	1.0	7	28	-70	+25	+25
390	D	738D397X0025D2	31.8	10	1.0	7	28	-70	+25	+25
30 VDC at + 85°C, 19 VDC at + 125°C, 15 VDC at + 175°C										
15	A	738D156X0030A2	7.5	10	1.0	1	2	-20	+10.5	+12
68	B	738D686X0030B2	25.6	10	1.0	1	8	-24	+13	+15
120	C	738D127X0030C2	24.4	10	1.0	2	17	-44	+13	+15
150	C	738D157X0030C2	37.7	10	1.0	2	18	-48	+13	+15
270	D	738D277X0030D2	27.2	10	1.0	8	32	-60	+25	+25
40 VDC at + 85°C, 25 VDC at + 125°C, 20 VDC at + 175°C										
12	A	738D126X0040A2	6.7	10	1.0	1	2	-24	+8	+10
56	B	738D566X0040B2	21.1	10	1.0	1	9	-28	+13	+15
100	C	738D107X0040C2	15.7	10	1.0	2	17	-40	+13	+15
220	D	738D227X0040D2	25.0	10	1.0	8	32	-55	+25	+25
50 VDC at + 85°C, 32 VDC at + 125°C, 25 VDC at + 175°C										
10	A	738D106X0050A2	5.7	10	1.0	1	2	-24	+8	+9
47	B	738D476X0050B2	17.7	10	1.0	1	9	-28	+12	+15
82	C	738D826X0050C2	20.6	10	1.0	2	16	-32	+12	+15
180	D	738D187X0050D2	23.7	10	1.0	8	32	-50	+25	+25
63 VDC at + 85°C, 40 VDC at + 125°C, 32 VDC at + 175°C										
8.2	A	738D825X0063A2	4.1	10	1.0	1	2	-24	+8	+9
39	B	738D396X0063B2	17.2	10	1.0	1	9	-28	+10.5	+12
68	C	738D686X0063C2	25.6	10	1.0	2	16	-32	+10.5	+12
150	D	738D157X0063D2	23.6	10	1.0	8	32	-40	+20	+20
75 VDC at + 85°C, 50 VDC at + 125°C, 38 VDC at + 175°C										
5.6	A	738D565X0075A2	3.4	10	1.0	1	2	-20	+8	+9
6.8	A	738D685X0075A2	3.4	10	1.0	1	2	-20	+8	+9
27	B	738D276X0075B2	11.8	10	1.0	1	9	-22	+11	+13
33	B	738D336X0075B2	14.5	10	1.0	1	10	-24	+15	+15
56	C	738D566X0075C2	21.8	10	1.0	2	17	-28	+15	+15
100	D	738D107X0075D2	19.5	10	1.0	9	36	-35	+20	+20
120	D	738D127X0075D2	23.3	10	1.0	9	36	-35	+20	+20
100 VDC at + 85°C, 63 VDC at + 125°C, 50 VDC at + 175°C										
4.7	A	738D475X0100A2	2.9	30	3.0	1	2	-16	+7	+8
18	B	738D186X0100B2	7.8	15	1.5	1	8	-16	+7	+8
22	B	738D226X0100B2	9.7	15	1.5	1	9	-16	+7	+8
33	C	738D336X0100C2	9.3	15	1.0	2	15	-16	+7	+8
39	C	738D396X0100C2	14.7	15	1.0	2	17	-20	+7	+8
47	C	738D476X0100C2	17.7	15	1.0	2	17	-20	+7	+8
68	D	738D686X0100D2	13.7	15	1.5	9	36	-25	+15	+15
82	D	738D826X0100D2	16.4	15	1.5	9	36	-25	+15	+15
125 VDC at + 85°C, 80 VDC at + 125°C, 63 VDC at + 175°C										
3.3	A	738D335X0125AR	3.4	30	3.0	1	2	-10	+7	+8
3.9	A	738D395X0125A2	3.4	30	3.0	1	2	-16	+7	+8
10	B	738D106X0125B2	9.4	15	1.5	1	5	-16	+7	+8
12	B	738D126X0125B2	8.3	15	1.5	1	6	-16	+7	+8
15	B	738D156X0125B2	11.2	15	1.5	1	7	-16	+7	+8
18	C	738D186X0125C2	10	15	1.0	2	9	-16	+7	+8
22	C	738D226X0125C2	12.1	15	1.0	2	11	-16	+7	+8
27	C	738D276X0125C2	16.7	15	1.0	2	13	-16	+7	+8
39	D	738D396X0125D2	7.5	15	1.5	10	40	-25	+15	+15
47	D	738D476X0125D2	9.2	15	1.5	10	40	-25	+15	+15
56	D	738D566X0125D2	14.2	15	1.5	10	40	-25	+15	+15

Wet Tantalum Capacitors
with Glass to Tantalum Hermetic Seal,
Sintered Anode TANTALEX[®] Capacitors

Vishay Tansitor

CT9 STANDARD RATINGS

CAPACITANCE (μF)	CASE CODE	PART NUMBER*	Max. DF at + 20°C (%)	Max. IMP. at - 55°C 100 KHz (Ohms)	Max. DCL (μA) at		Max. CAPACITANCE CHANGE (%) at		
					+ 20°C	+ 85°C + 125°C	- 55°C	+ 85°C	+ 125°C
6.3 VDC at + 85°C, 4 VDC at + 125°C, 3 VDC at + 175°C									
68	A	CT9686X06R3A2	15	72	1	2	-40	+14	+16
270	B	CT9277X06R3B2	41	30	1	7	-44	+17.5	+20
560	C	CT9567X06R3C2	55	30	2	16	-64	+17.5	+20
1200	D	CT9128X06R3D2	94	24	4	16	-80	+25	+25
10 VDC at + 85°C, 6.3 VDC at + 125°C, 5 VDC at + 175°C									
47	A	CT9476X0010A2	14	120	1	2	-36	+14	+16
180	B	CT9187X0010B2	29	48	1	7	-36	+14	+16
390	C	CT9397X0010C2	44	30	2	16	-64	+17.5	+20
820	D	CT9827X0010D2	65	28	4	16	-80	+25	+25
16 VDC at + 85°C, 10 VDC at + 125°C, 8 VDC at + 175°C									
33	A	CT9 336X0016A2	10	108	1	2	-28	+14	+16
120	B	CT9127X0016B2	24	60	1	7	-28	+17.5	+20
270	C	CT9277X0016C2	45	36	2	16	-56	+17.5	+20
560	D	CT9567X0016D2	44	28	6	24	-80	+25	+25
25 VDC at + 85°C, 16 VDC at + 125°C, 13 VDC at + 175°C									
22	A	CT9226X0025A2	7	168	1	2	-20	+10.5	+12
100	B	CT9107X0025B2	21	60	1	10	-28	+13	+15
180	C	CT9187X0025C2	29	39	2	18	-48	+13	+15
390	D	CT9397X0025D2	40	29	7	28	-70	+25	+25
40 VDC at + 85°C, 25 VDC at + 125°C, 20 VDC at + 175°C									
12	A	CT9126X0040A2	6	234	1	2	-24	+ 8	+10
56	B	CT9566X0040B2	14	78	1	9	-28	+13	+15
100	C	CT9107X0040C2	18	48	2	17	-40	+13	+15
220	D	CT9227X0040D2	27	31	8	32	-55	+25	+25
63 VDC at + 85°C, 40 VDC at + 125°C, 32 VDC at + 175°C									
8.2	A	CT9825X0063A2	4.5	330	1	2	-24	+ 8	+ 9
39	B	CT9396X0063B2	12	108	1	9	-28	+10.5	+12
68	C	CT9686X0063C2	13	60	2	16	-32	+10.5	+12
150	D	CT9157X0063D2	18	34	8	32	-40	+20	+20
80 VDC at + 85°C, 50 VDC at + 125°C, 40 VDC at + 175°C									
6.8	A	CT9685X0080A2	5	360	1	2	-20	+ 8	+ 9
33	B	CT9336X0080B2	10	108	1	10	-24	+10.5	+15
56	C	CT9566X0080C2	11	72	2	17	-28	+10.5	+15
100	D	CT9107X0080D2	12	36	9	36	-35	+20	+20
100 VDC at + 85°C, 63 VDC at + 125°C, 50 VDC at + 175°C									
4.7	A	CT9475X0100A2	3	600	1	2	-16	+ 7	+ 8
22	B	CT9226X0100B2	8	132	1	9	-16	+ 7	+ 8
47	C	CT9476X0100C2	8	84	2	17	-20	+ 7	+ 8
82	D	CT9826X0100D2	10	40	9	36	-25	+15	+15
125 VDC at + 85°C, 80 VDC at + 125°C, 63 VDC at + 175°C									
3.9	A	CT9395X0125A2	3.5	720	1	2	-16	+ 7	+ 8
15	B	CT9156X0125B2	6	200	1	7	-16	+ 7	+ 8
27	C	CT9276X0125C2	6	106	2	13	-16	+ 7	+ 8
56	D	CT9566X0125D2	7	58	10	40	-25	+15	+15

738D, CT9 (CECC 30202-004)

Vishay Tansitor

Wet Tantalum Capacitors
with Glass to Tantalum Hermetic Seal,
Sintered Anode TANTALEX[®] Capacitors

CT9 EXTENDED RATINGS

CAPACITANCE (μF)	CASE CODE	PART NUMBER*	Max. DF at + 20°C (%)	Max. IMP. at - 55°C 100 KHz (Ohms)	Max. DCL (μA) at		Max. CAPACITANCE CHANGE (%) at		
					+ 20°C	+ 85°C + 125°C	- 55°C	+ 85°C	+ 125°C
6.3 VDC at + 85°C, 4 VDC at + 125°C, 3 VDC at + 175°C									
180	A	CT9187X06R3A2	30	55	1.0	10	-60	+13	+16
820	B	CT9827X06R3B2	115	22	2.0	17	-88	+16	+20
1500	C	CT9158X06R3C2	115	22	6.0	25	-90	+20	+25
2200	D	CT9228X06R3D2	125	16	6.0	25	-90	+25	+70
10 VDC at + 85°C, 6.3 VDC at + 125°C, 5 VDC at + 175°C									
150	A	CT9157X0010A2	25	65	1.0	10	-55	+13	+16
560	B	CT9567X0010B2	80	34	2.0	17	-77	+16	+20
1200	C	CT9128X0010C2	95	22	3.0	25	-88	+20	+25
1500	D	CT9158X0010D2	85	18	6.0	25	-88	+25	+30
16 VDC at + 85°C, 10 VDC at + 125°C, 8 VDC at + 175°C									
100	A	CT9107X0016A2	25	88	1.0	10	-44	+13	+16
390	B	CT9397X0016B2	55	38	2.0	17	-66	+16	+20
820	C	CT9827X0016C2	85	27	4.0	25	-77	+20	+25
1000	D	CT9108X0016D2	60	21	6.0	35	-80	+30	+30
25 VDC at + 85°C, 16 VDC at + 125°C, 13 VDC at + 175°C									
68	A	CT9686X0025A2	17	110	1.0	10	-40	+12	+15
270	B	CT9277X0025B2	38	40	2.0	17	-62	+13	+16
560	C	CT9567X0025C2	58	25	5.0	35	-72	+20	+25
680	D	CT9687X0025D2	38	24	6.0	35	-80	+25	+30
40 VDC at + 85°C, 25 VDC at + 125°C, 20 VDC at + 175°C									
39	A	CT9396X0040A2	12	140	2.0	10	-35	+10	+12
150	B	CT9157X0040B2	22	50	4.0	35	-52	+13	+16
330	C	CT9337X0040C2	22	30	6.0	40	-60	+20	+25
470	D	CT9477X0040D2	35	28	6.0	40	-70	+25	+30
63 VDC at + 85°C, 40 VDC at + 125°C, 32 VDC at + 175°C									
27	A	CT9276X0063A2	8.0	180	2.0	15	-24	+10	+12
100	B	CT9107X0063B2	15	70	4.0	25	-36	+12	+15
220	C	CT9227X0063C2	23	36	5.0	35	-40	+16	+20
270	D	CT9277X0063D2	26	35	6.0	40	-65	+25	+30
80 VDC at + 85°C, 50 VDC at + 125°C, 40 VDC at + 175°C									
22	A	CT9226X0080A2	6.0	190	2.0	15	-19	+10	+12
82	B	CT9826X0080B2	12	80	4.0	25	-30	+12	+15
180	C	CT9187X0080C2	19	36	5.0	40	-35	+16	+20
220	D	CT9227X0080D2	21	30	6.0	40	-60	+20	+25
100 VDC at + 85°C, 63 VDC at + 125°C, 50 VDC at + 175°C									
10	A	CT9106X0100A2	4.0	250	2.0	15	-17	+10	+12
39	B	CT9396X0100B2	7.0	96	4.0	30	-20	+12	+15
68	C	CT9686X0100C2	8.0	50	5.0	50	-30	+14	+16
120	D	CT9127X0100D2	15	36	6.0	50	-40	+15	+20
125 VDC at + 85°C, 80 VDC at + 125°C, 63 VDC at π + 175°C									
6.8	A	CT9685X0125A2	4.0	360	2.0	15	-14	+10	+12
27	B	CT9276X0125B2	5.0	110	4.0	30	-18	+12	+15
47	C	CT9476X0125C2	6.0	65	5.0	50	-26	+16	+16
82	D	CT9826X0125D2	8.0	40	6.0	50	-30	+16	+17