



CTA82, CTA822 Series

CTA82A, CTA822



코일정격 (Magnet coil ratings)

Nominal voltage(V)	Item	Nominal current (mA)	Coil resistance (Ω)	Pull-in voltage (V)	Drop-out voltage (V)	Max. voltage (V)	Coil power(W) dissipation
DC	110	94 / 146	1170 / 750	70% max.	10% min.	110%	Continuous 7 to 13
	80	130 / 220	600 / 365				
	72	157 / 350	458 / 205				
	60	200 / 280	305 / 212				
	48	226 / 400	212 / 120				Intermittently 15 to 20
	36	300 / 490	120 / 73				
	24	460 / 830	52 / 29				
	12	860 / 1330	14 / 9				
6	1710 / 2600	3.5 / 2.3					


Notes : 1. Nominal current and coil resistance are measured at +20°C.
 2. Differences of coil resistance are ±10%.
 3. Performance characteristic coil temperature is measured at 20°C.

접점정격 (Contact ratings)

(60VDC기준)

Item	Type	CTA82	CTA822
		Double Pole Single Throw	Paired Double Pole Single Throw
Max. switching current		60A	
Max. switching voltages(With blowouts type)		96VDC	
Max. switching voltages(Without blowouts type)		60VDC	
Voltage drop across contacts per 100A		50mV	
Description		DP On/OFF	PDP On/Off

주문방법 (Ordering information)

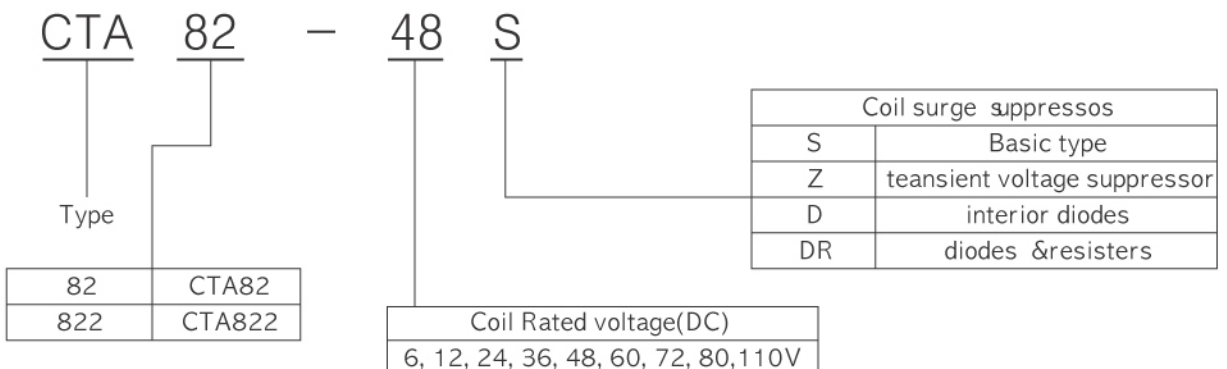


CTA82, CTA822 Series

CTA82A, CTA822



외형치수도 (Dimension in mm) CTA82

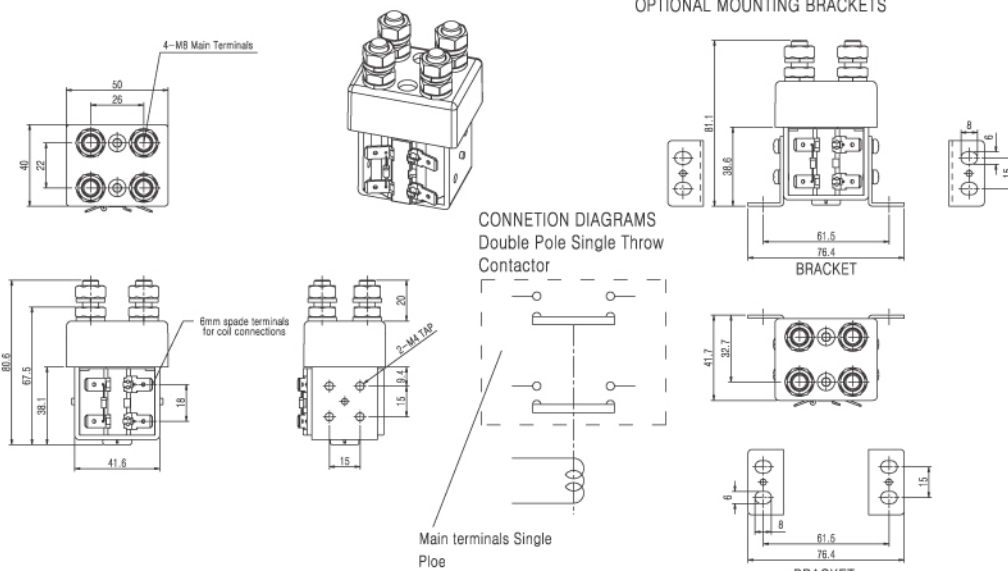

외형치수도 (Dimension in mm) CTA822

