


CTDD1907SF-SU1K-2 Series

Fixed Input Isolated & Unregulated
2W Output, Single Output

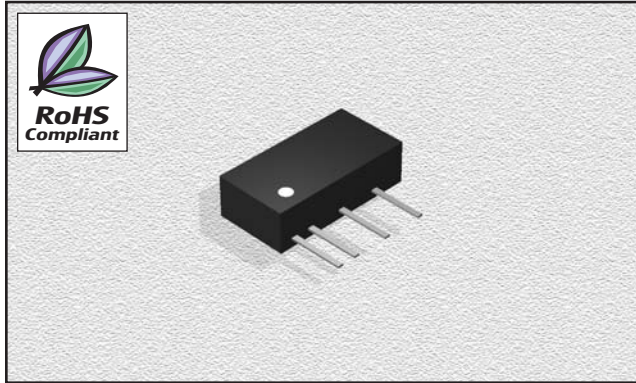

FEATURES

- Efficiency:** To 86%
- Temperature Range:** -40°C to +85°C
- Isolation:** 1KVDC
- Package:** UL94-V0
- Miscellaneous:** No heat sink required. No external component required. Industry standard pinout. Miniature SIP package. Single Output Voltage. Fully Encapsulated. Power Density up to 1.40W/cm³. PCB Mounting. Footprint from 1.05cm². Samples available.

CHARACTERISTICS

- Short Circuit Protection:** 1 second
- Temperature Rise at Full Load:** 25°C Max. 15°C Typ.
- Cooling:** Free air convection
- No Load Power Consumption: 10% nominal power (typical)
- Operating Temperature Range:** -40°C to +85°C
- Storage Temperature Range:** -55°C to +125°C
- Lead temperature:** 300°C (1.5mm from case for 10 seconds)
- Storage Humidity Range:** ≤ 95%
- Case Material:** Plastic (UL94-V0)
- MTBF:** >3,500,000 hours
- Miscellaneous:** RoHS Compliant.

SPECIFICATIONS

Part Number	Vin Nom. (VDC)	Input Range (VDC)	Vout (VDC)	Iout Max. (mA)	Iout Min. (mA)	Effi. Typ. (%)
CTDD1907SF-0505-SU1K-2	5	4.5-5.5	5	400	40	81
CTDD1907SF-0509-SU1K-2	5	4.5-5.5	9	222	23	82
CTDD1907SF-0512-SU1K-2	5	4.5-5.5	12	167	17	84
CTDD1907SF-0515-SU1K-2	5	4.5-5.5	15	133	14	84
CTDD1907SF-1205-SU1K-2	12	10.8-13.2	5	400	40	82
CTDD1907SF-1209-SU1K-2	12	10.8-13.2	9	222	23	83
CTDD1907SF-1212-SU1K-2	12	10.8-13.2	12	167	17	85
CTDD1907SF-1215-SU1K-2	12	10.8-13.2	15	133	14	85
CTDD1907SF-2405-SU1K-2	24	21.6-26.4	5	400	40	83
CTDD1907SF-2409-SU1K-2	24	21.6-26.4	9	222	23	84
CTDD1907SF-2412-SU1K-2	24	21.6-26.4	12	167	17	86
CTDD1907SF-2415-SU1K-2	24	21.6-26.4	15	133	14	86
CTDD1907SF-2424-SU1K-2	24	21.6-26.4	24	83	8	86

ISOLATION SPECIFICATIONS

Item	Test Condition	MIN	TYP	MAX	Units
Isolation Voltage	Tested for 1 minute	1000			VDC
Isolation Resistance	Test at 500VDC	1000			MΩ


OUTPUT SPECIFICATIONS

Item	Test Condition	MIN	TYP	MAX	Units
Output Power		0.2		2	W
Line regulation	For Vin change of 1%			1.2	%
Load regulation	10% to 100%		10	15	%
Output voltage accuracy	See tolerance envelope graph				
Temperature drift	100% Full load			0.03	%/°C
Output ripple	20MHz Bandwidth		100	150	mVp-p
Switching frequency	Full load, nominal input		75		KHz

Note:

1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output unless otherwise specified.

TYPICAL CHARACTERISTICS

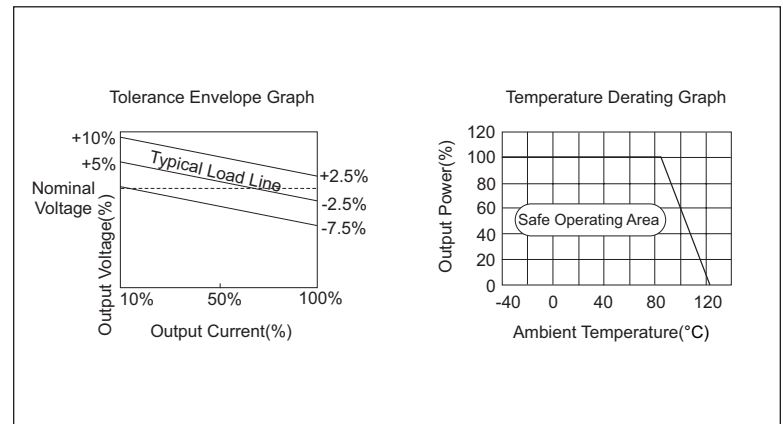


CTDD1907SF-SU1K-2 Series


Fixed Input Isolated & Unregulated
2W Output, Single Output

OUTLINE DIMENSIONS & RECOMMENDED FOOTPRINT DETAILS

CTDD1907SF-SU1K-2 Package

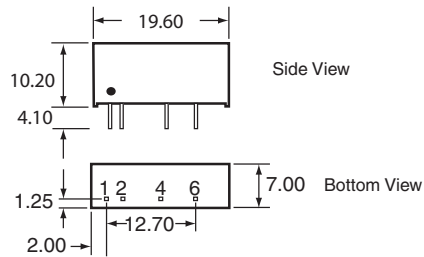

CTDD1907SF-SU1K-2 Footprint



Note: All Pins on a 2.54m pitch; all pin diameters are 0.50mm; all dimensions in mm.

PIN CONNECTIONS

Pin	Function
1	Vin
2	GND
4	0V
6	+Vo



01.08.07