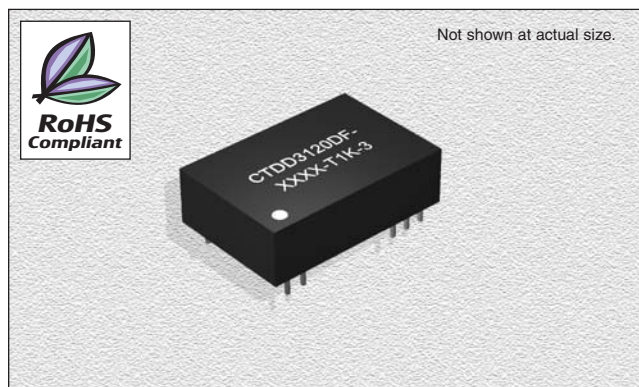


CTDD3120DF-T1K-3 Series**Wide Input Isolated & Regulated****3W Output, Twin Output****FEATURES****Efficiency:** To 85%**Temperature Range:** -40°C to +85°C**Package:** UL94-V0**Isolation:** 1KVDC**Miscellaneous:** Wide (2:1) Input Range. No heat sink required. Industry Standard Pinout. Twin Isolated Output. Custom service available.**Samples available.****CHARACTERISTICS****Output Short Circuit Protection:** Continuous**Temperature Rise at Full Load:** 30°C (Typ.)**Cooling:** Free air convection**No Load, Power Consumption:** 100mW (typical)**Operating Temperature Range:** -40°C to +85°C**Storage Temperature Range:** -55°C to +125°C**Lead Temperature:** 300°C (1.5mm from case for 10 seconds)**Storage Humidity Range:** ≤ 95%**Case Material:** Plastic (UL94-V0)**MTBF:** >3,500,000 hours**Miscellaneous:** RoHS Compliant.**SPECIFICATIONS**

Part Number	Vin Nom. (VDC)	Input Range (VDC)	Vin Max.* (VDC)	Vo1,Vo2 (VDC)	Io1, Io2 Max. (mA)	Io1, Io2 Min. (mA)	Effi. Typ. (%)
CTDD3120DF-050505-T1K-3	5	4.5-9.0	11	5	300	30	72
CTDD3120DF-050909-T1K-3	5	4.5-9.0	11	9	160	16	74
CTDD3120DF-051212-T1K-3	5	4.5-9.0	11	12	125	13	78
CTDD3120DF-051515-T1K-3	5	4.5-9.0	11	15	100	10	78
CTDD3120DF-120505-T1K-3	12	9.0-18	22	5	300	30	73
CTDD3120DF-120909-T1K-3	12	9.0-18	22	9	160	16	77
CTDD3120DF-121212-T1K-3	12	9.0-18	22	12	125	13	79
CTDD3120DF-121515-T1K-3	12	9.0-18	22	15	100	10	79
CTDD3120DF-150505-T1K-3	15	12-24	30	5	300	30	74
CTDD3120DF-150909-T1K-3	15	12-24	30	9	160	16	78
CTDD3120DF-151212-T1K-3	15	12-24	30	12	125	13	79
CTDD3120DF-151515-T1K-3	15	12-24	30	15	100	10	79
CTDD3120DF-240505-T1K-3	24	18-36	40	5	300	30	77
CTDD3120DF-240909-T1K-3	24	18-36	40	9	160	16	79
CTDD3120DF-241212-T1K-3	24	18-36	40	12	125	13	80
CTDD3120DF-241515-T1K-3	24	18-36	40	15	100	10	80
CTDD3120DF-480505-T1K-3	48	36-72	80	5	300	30	77
CTDD3120DF-480909-T1K-3	48	36-72	80	9	160	16	80
CTDD3120DF-481212-T1K-3	48	36-72	80	12	125	13	81
CTDD3120DF-481515-T1K-3	48	36-72	80	15	100	10	81

*If Input voltage above specified may cause permanent damage to the device

ISOLATION SPECIFICATIONS


Item	Test Condition	MIN	TYP	MAX	Units
Isolation Voltage	Flash tested for 1 minute	1000			VDC
Isolation Resistance	Test at 500VDC	1000			MΩ

OUTPUT SPECIFICATIONS

Item	Test Condition	MIN	TYP	MAX	Units
3W Output Power		0.3		3	W
Output voltage accuracy	Refer to Recommended Circuit		±1	±3	%
Load regulation	From 10% to 100% load		±0.5	±1	%
Line regulation	Input Voltage from low to high		±0.2	±0.5	%
Temperature drift (Vout)	Refer to Temp. Derating Graph			0.03	%/°C
Ripple	20Hz to 300kHz Bandwidth		30	60	mVp-p
Noise	DC-20MHz Bandwidth		80	150	mVp-p
Switching frequency	100% load, nominal input voltage	80		200	KHz
Switching frequency	10% load, nominal input voltage	250		600	KHz

Note:

1. All specifications measured at TA=25°C, humidity<75%, nominal input voltage and rated output unless otherwise specified.

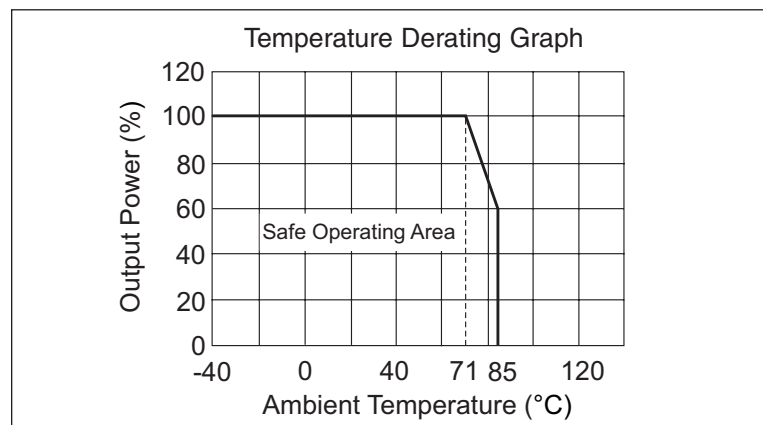TYPICAL CHARACTERISTICS


12.20.06

CTDD3120DF-T1K-3 Series

Wide Input Isolated & Regulated
3W Output, Twin Output

OUTLINE DIMENSIONS & RECOMMENDED FOOTPRINT DETAILS


CTDD3120DF-T1K-3 Package

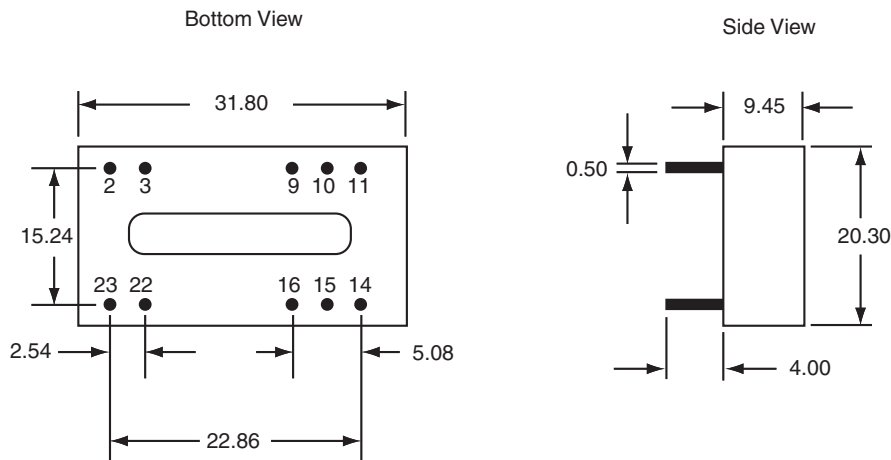

Note: All pins on a 2.54mm pitch; all pin diameters are 0.50mm; all dimensions in mm. (Tolerance:±0.25)

PIN CONNECTIONS

Bottom View



Pin	Function
2, 3	GND
14	Vo1
16	0V1
11	Vo2
9	0V2
22, 23	Vin

RECOMMENDED CIRCUIT

All the CTDD3120DF-T1K-3 Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load. Never be tested under no load (See figure 1 & 2). If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance should not be too high (See table 1). If you want to use the products in high EMI, please choose our metal packaged products.

External Capacitor Table (table 1)

Vin	C _{in}	C _{out} (0+70°C)	C _{out} (-40+85°C)
5V & 12V	100μF	100μF (electrolytic capacitor)	47μF (tantalum capacitor)
24V & 48V	10μF		

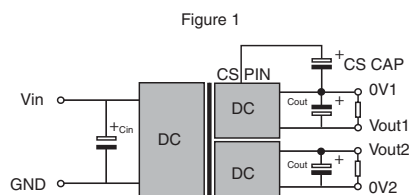


Figure 2

