


CTDO3308 Series

From 4.7 μH to 1,000 μH

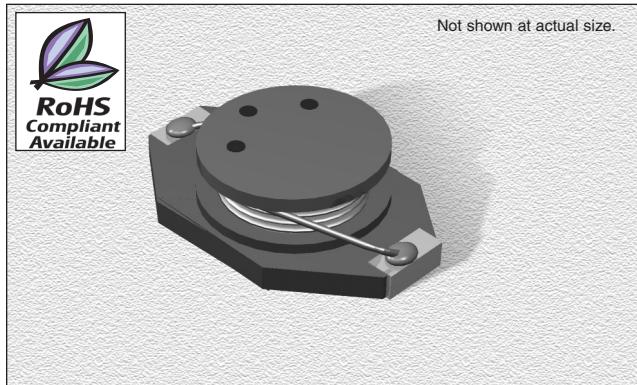

CHARACTERISTICS

Description: SMD power inductor

Applications: DC/DC converters, computers, LCD displays, telecommunication equipment and PDA palm tops.

Operating Temperature: -40°C to +85°C

Inductance Tolerance: $\pm 20\%$

Inductance Drop: 10% typically at I_{sat}

Testing: Inductance is tested on an HP4285A at 100 kHz

Packaging: Tape & Reel

Marking: Color dots or Inductance code


Miscellaneous: RoHS Compliant available

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.

PAD LAYOUT

Unit: mm

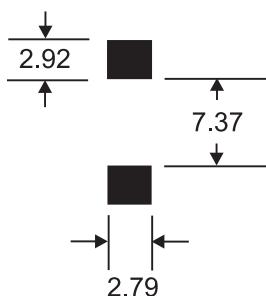

SPECIFICATIONS




Parts are available in $\pm 20\%$ tolerance only.
CTDO3308PE Please specify "F" for RoHS Compliant

Part Number	Inductance (μH)	L Test Freq. (kHz)	DCR (Ω)	I_{sat} (A)	I_{rms} (A)
CTDO3308P_-472	4.7	100	.04	4.2	3.2
CTDO3308P_-682	6.8	100	.06	3.9	2.6
CTDO3308P_-103	10	100	.09	2.4	2.0
CTDO3308P_-153	15	100	.12	2.0	1.5
CTDO3308P_-223	22	100	.19	1.6	1.3
CTDO3308P_-333	33	100	.25	1.4	1.1
CTDO3308P_-473	47	100	.32	1.0	.80
CTDO3308P_-683	68	100	.55	.90	.70
CTDO3308P_-104	100	100	.70	.70	.60
CTDO3308P_-154	150	100	1.0	.60	.50
CTDO3308P_-224	220	100	1.6	.50	.40
CTDO3308P_-334	330	100	2.2	.40	.30
CTDO3308P_-474	470	100	3.3	.30	.20
CTDO3308P_-684	680	100	4.4	.20	.10
CTDO3308P_-105	1000	100	7.0	.10	.05

PHYSICAL DIMENSIONS

Size	A Max.	B Max.	C Max.	D	E	F
mm	12.95	9.4	3	2.54	2.54	7.62
inches	0.51	0.37	0.12	0.1	0.1	0.3

Parts will be marked with
Significant Digit Dots OR Inductance Code

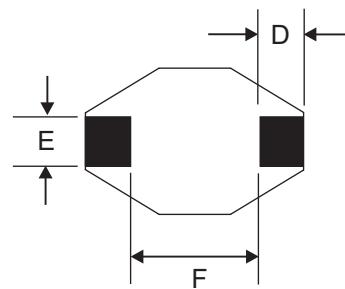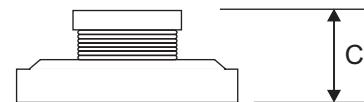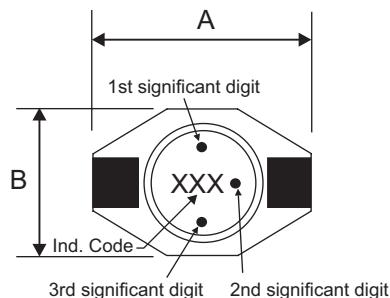

06.18.07