

Panther Batterien

Batteriedatenblatt



CTX12-BS


ETN: 510 0 12 009
DIN: 51012

Specifications

Model NO.	CTX12-BS DIN:51012 ETN:510012009	
Same Dimensions As YUASA Model	YTX12-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	10 AH	
Dimension	Length	151 mm (5.94 inches)
	Width	87 mm (3.43 inches)
	Height	130 mm (5.12 inches)
	Total Height	130 mm (5.12 inches)
Approx. Weight W/O . ACID	2.99kg (6.60 Lbs)	
Approx. ACID Per Battery	0.57 L	
Charge Current (A)	1.0A	



Dimensions

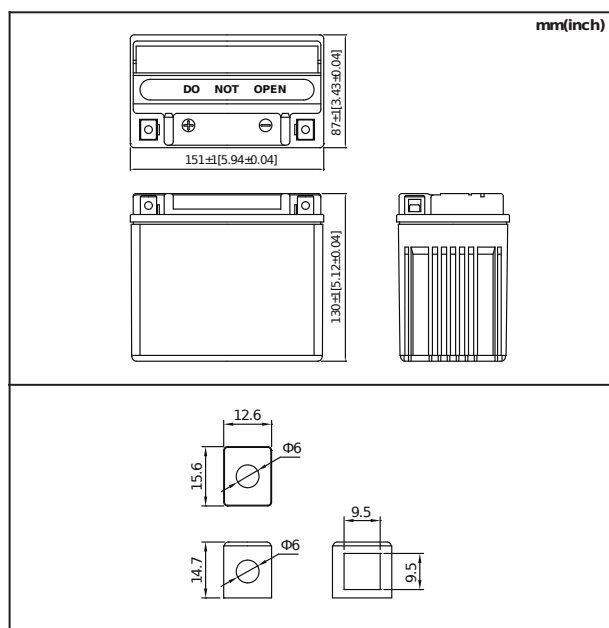

Characteristics

Capacity 25°C(77°F)	10hours rate (1.0 A to 10.5V)	10.0 Ah
	5hours rate (2.0 A to 10.2V)	8.5 Ah
	1C (10.0 A to 9.6V)	4.5 Ah
	3C (30.0 A to 9.6V)	3.6 Ah
Cold Cranking Amperes(-18°C SAE Standard)		160 A
Cold Cranking Amperes(-18°C EN Standard)		240 A
Internal Resistance (at 1KHz)		Appox.9.0mΩ
Operating Temperature Range	Charge 0°C (32°F) to 40°C (104°F)	
	Discharge -15°C (5°F) to 50°C (122°F)	
	Storage -15°C (5°F) to 40°C (104°F)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	PP	

