

**2D Comb Filter NTSC/PAL/SECAM
Video Decoder**

DVD

Digital Camera

Digital TV

Imaging

IP Cores

Product Brief

Zoran Corporation
1390 Kifer Road
Sunnyvale, CA 94086-5305

Tel 408.523.6500
Fax 408.523.6501
www.zoran.com

**Benefits Overview**

Zoran's CVD1 Video Decoder is a silicon efficient, cost effective, high video quality Intellectual Property Core for IC designs requiring video input. The CVD2 decodes NTSC/PAL/SECAM composite video or S-video and converts it into YUV 4:2:2, 16-bit digital video. Employing adaptive 2D comb filter technology, the CVD1 is able to provide high quality Y/C separation while maintaining excellent frequency response.

The result is sharp, high detail video that eliminates unwanted dot crawl and false color effects. A fully digital design, the CVD1 requires the addition of only an A/D (two for S-Video support), a DC restore circuit and line buffers for implementation.

CVD1 is based on Zoran's extensive experience delivering high quality, high volume video ICs to major OEMs worldwide. Proven in silicon, the CVD1 Video Decoder greatly reduces the risk and time involved when integrating the video decoding function into an IC.

Deliverables

- RTL (Verilog) source code
- Bit accurate C++ model
- Synopsis synthesis scripts
- Test input files
- Documentation
- FPGA evaluation board available

Features

- Decodes NTSC, PAL or SECAM composite video or S-Video into the YUV 4:2:2 format
- Component video inputs supported
- Decodes all variations of the NTSC standard
- Decodes all variations of PAL standard
 - (I, B, G, H, D, N, M, combination N)
- Excellent quality Y/C separation
 - minimizes cross luma and cross color effects
- Superior frequency response preserves fine detail
- Accepts up to 11-bit inputs from A/D converter
- Digital automatic gain control (AGC) supported

- Adaptive 2D Comb Filter provides high quality video:
 - 3-line 2D Comb Filter for NTSC & PAL
 - 5-line 2D Comb Filter for PAL (optional)
- Auto-detects video standard (NTSC, PAL or SECAM)
- Auto-detects and locks to VCR trick modes
- Decodes weak and noisy off-air signals
- Auto-detects and decodes Macrovision copy protection
- VBI decoding supported
- Silicon efficient design of approximately 130k gates
- Requires only a single clock input ranging from 20 to 30 MHz
- Process technology independent, fully synchronous design

**2D Comb Filter NTSC/PAL/SECAM
Video Decoder**

Product Brief

Figure 1. Block Diagram of the CVD1 Intellectual Property Core


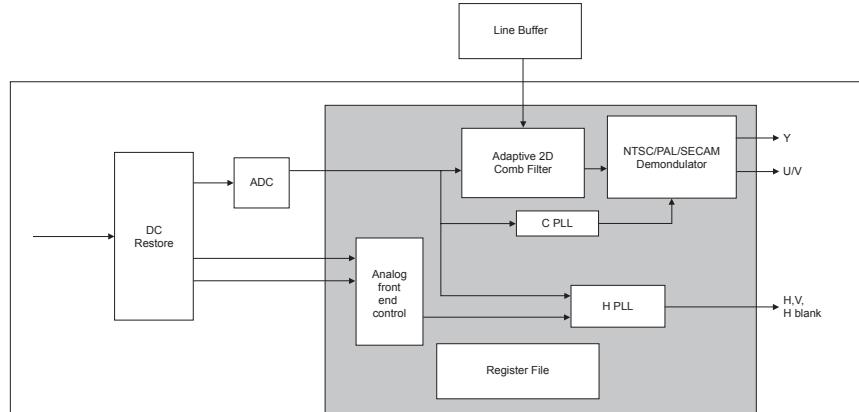


Figure 2. CVD1 Logical Pinout

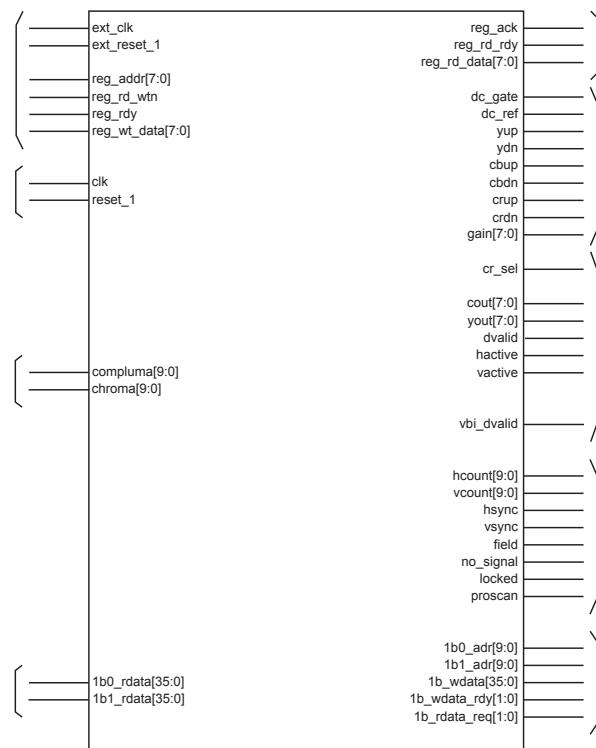

For more information, contact Zoran's Sunnyvale office or the office nearest you:

Canada

Zoran Toronto Lab
Tel: (416) 690-3356
Fax: (416) 690-3363

China

Zoran China Office
Tel: 86-755-83993777
Fax: 86-755-83220889

Hong Kong

Zoran Asia Pacific Ltd.
Tel: +852-2-620-5838
Fax: +852-2-620-5238

Israel

Zoran Microelectronics Ltd.
Tel: +972-4-8545-777
Fax: +972-4-8551-551

Japan

Zoran Japan Office
Tel: +81-03-5475-1051
Fax: +81-03-5475-1053

Korea

Zoran Korea Office
Tel: +82-2-761-7471
Fax: +82-2-761-7472

Taiwan

Zoran Taiwan Office
Tel: +886-2-2659-9797
Fax: +886-2-2659-9595