


C-MOS ADDRESS DECODER

—TOP VIEW—

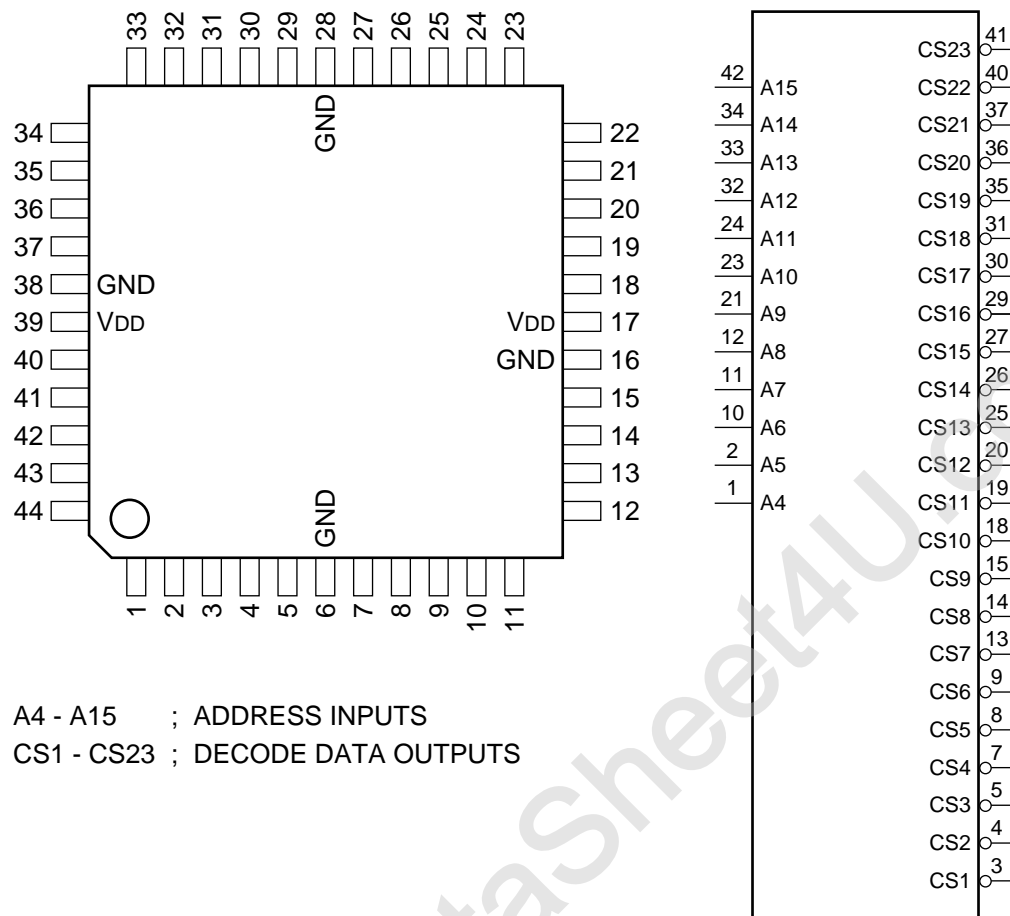

A4 - A15 ; ADDRESS INPUTS
 CS1 - CS23 ; DECODE DATA OUTPUTS

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	A4	12	I	A8	23	I	A10	34	I	A14
2	I	A5	13	O	CS7	24	I	A11	35	O	CS19
3	O	CS1	14	O	CS8	25	O	CS13	36	O	CS20
4	O	CS2	15	O	CS9	26	O	CS14	37	O	CS21
5	O	CS3	16	—	GND	27	O	CS15	38	—	GND
6	—	GND	17	—	VDD	28	—	GND	39	—	VDD
7	O	CS4	18	O	CS10	29	O	CS16	40	O	CS22
8	O	CS5	19	O	CS11	30	O	CS17	41	O	CS23
9	O	CS6	20	O	CS12	31	O	CS18	42	I	A15
10	I	A6	21	I	A9	32	I	A12	43	—	NC
11	I	A7	22	—	NC	33	I	A13	44	—	NC