

D1086-T110L-CC

Acousto-Optic Modulator




1212

Compact AO Deflector designed for High Power Fibre and DPSS, NIR lasers. The unit incorporates four section acoustic beam steering to produce a flat scan response. Applications include high speed, sequential multi-point scanning or fast sweep operation.

SPECIFICATIONS

Spectral Range:	0.36 > 1.5µm
Standard A/R Wavelengths:	1.1µm
Optical Power:	100 Watts **
Interaction Medium:	Tellurium Dioxide (TeO2)
Acoustic Velocity:	4.2mm/µs
Centre Frequency (Fc):	110MHz nominal
RF Bandwidth:	50MHz
Input Impedance:	50Ω Nominal
VSWR:	<1.5:1 @ Fc
Clear Aperture:	6.5mm
Active Aperture Height:	3mm
Static Insertion Loss	<3% at 1.1µm
Reflectivity:	< 0.5%/Surface
Laser Polarization:	Any
RF Power (total):	6 Watts nominal
Bragg Angle:	15 mrad
Typical Scan Angle:	13 mrad
Cooling:	Conduction to cooled surface required

TYPICAL SCAN PERFORMANCE at 1.1µm *

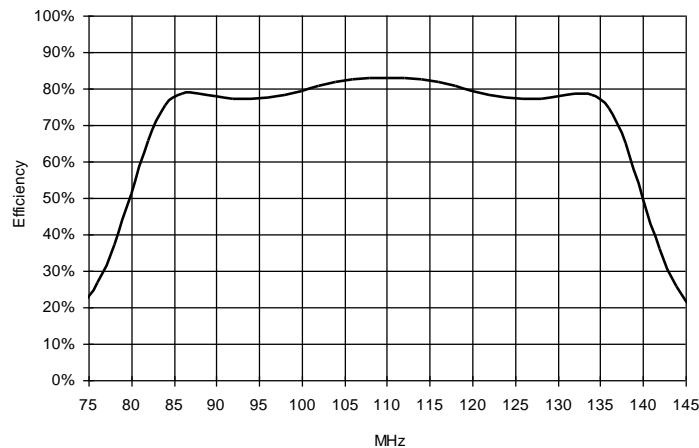

* Single mode input

** For higher powers please contact Isomet

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

**In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding**




D1086-T110L-CC

Acousto-Optic Modulator



1212

OUTLINE DRAWING (Dimensions: mm)

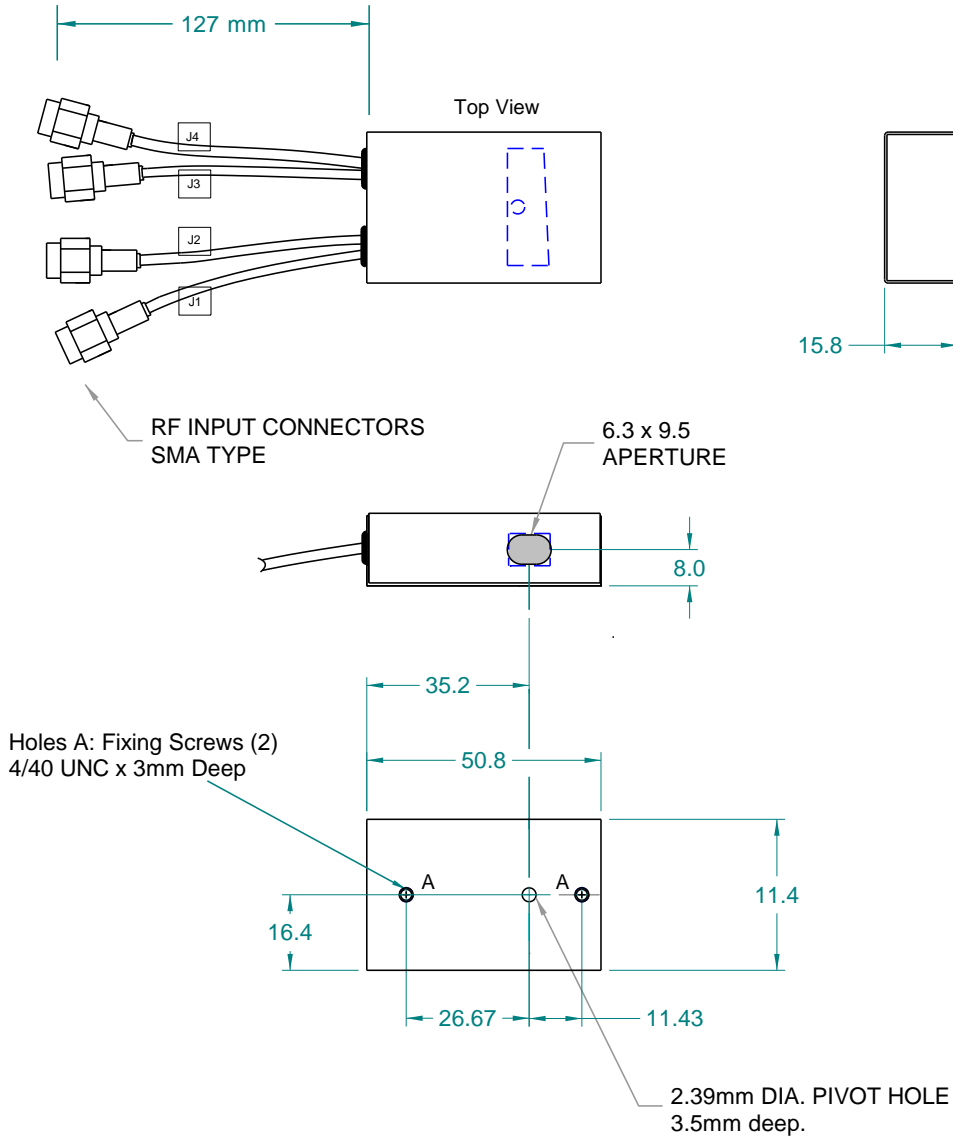

Recommended Driver

Model RFA3110-4-CC

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding