


D134 Dual Relay Module

www.boschsecurity.com



BOSCH
Invented for life

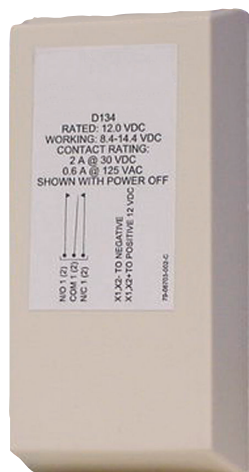

The D134 provides two Form C dry-contacts, each rated for 2 A at 12 VDC.

Certifications and approvals

Region	Certification
USA	UL AMCX: Central Station Alarm Units (UL1610, UL1635), AOTX: Local Alarm Units (UL464, UL609), APAW: Police Station Alarm Units (UL365, UL464), APOU: Proprietary Alarm Units (UL1076), NBSX: Household Burglar Alarm System Units (UL1023), UTOU: Control Units and Accessories - Household System Type (UL985)
	CSFM 7167-1615:0124

Installation/configuration notes

Compatibility Information

Control Panels: Easy Series, D6412, D4412, D2212B, D2212BE, B5512, and B4512.

Technical specifications

Properties

Dimensions	3.16 in x 1.51 in x 9 in
------------	--------------------------

Wire Specifications

50 ft	22 AWG
75 ft	18 AWG

Unshielded wire only.

Power Requirements

Current	40 mA per relay
Relay Output	2 A at 12 VDC

Ordering information

D134 Dual Relay Module

Provides two Form C dry contacts each rated for 2 A at 12 VDC.

Order number **D134**