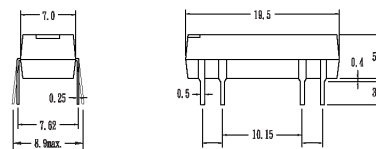



cosmo**Reed Relay****D1B241000**

UL 60950 (File No.E108430)

Features

1. Molded epoxy body.
2. Dip type construction with the same terminal pitch as ICs or TTLs simplifies PC board designing. In addition, the high sensitivity allows direct driving by TTL, etc.
3. Automatic insertion compatible.
4. Sealed construction permits automatic flow soldering and cleaning.
5. Diode & Magnetic shield are available.

Outside Dimension:Unit (mm)TOLERANCE : $\pm 0.1\text{mm}$ **Schematic:Top View****Coil Ratings**

(AT 20°C)

Parameter	Rating	Unit
Coil Resistance	2150	Ω ($\pm 10\%$)
Nominal Coil Voltage	24	VDC
Maximum Continuous Voltage	28	VDC
Must Operate	18	VDC
Must Release	2.4	VDC
Rated Current	11.1	mA

Electrical Characteristics

Parameter	Rating	Unit
Contact Resistance	100	m Ω (max)
Operate Time	0.5	ms(max)
Bounce Time	0.5	ms(max)
Release Time	0.2	ms(max)
Insulation Resistance (100VDC)	10^{11}	Ω (min)
Power	10	VA(max)
Switching Voltage	200	VDC(max)
Switching Current	0.5	A(max)
Carry Current	1.0	A(max)
Breakdown Voltage (Across Open Contact)	250	VDC(min)
(Between Coil & Contact)	500	VDC(min)
Life Expectancy (Signal Level)	10^8	
Operating Temp	-40 to 85	$^{\circ}\text{C}$
Storage Temp	-50 to 125	$^{\circ}\text{C}$
Resonant Frequency	3.5	KHZ
Vibration (10-2000HZ)	20	g(max)
Minimum Permissible Load	100	mVDC 10 μA