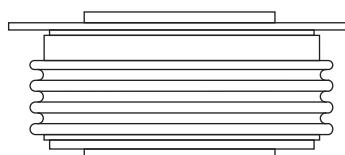


Standard Recovery Diodes (Hockey PUK Version), 2060A

FEATURES

- Wide current range
- High voltage ratings up to 2500 V
- High surge current capabilities
- Diffused junction
- Hockey PUK version
- Case style DO-200AB(B-PUK), Nell's C-type Capsule
- Lead (Pb)-free



TYPICAL APPLICATIONS

- Converters
- Power supplies
- Machine tool controls
- High power drives
- Medium traction applications

DO-200AB(B-PUK)
(Nell's C-type Capsule)

PRODUCT SUMMARY	
I _{F(AV)}	2060A

MAJOR RATINGS AND CHARACTERISTICS			
PARAMETER	TEST CONDITIONS	VALUES	UNIT
I _{F(AV)}		2060	A
	T _{hs}	55	°C
I _{F(RMS)}		3900	A
	T _{hs}	25	°C
I _{FSM}	50 HZ	23900	A
	60 HZ	25020	
I ² t	50 HZ	2856	kA ² s
	60 HZ	2598	
V _{RRM}		1600 to 2500	V
T _J	Typical	-40 to 175	°C

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	V _{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V _{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I _{RRM} , MAXIMUM AT T _J = T _J MAXIMUM mA
D2060C	16	1600	1700	60
	20	2000	2100	
	24	2400	2500	
	25	2500	2600	

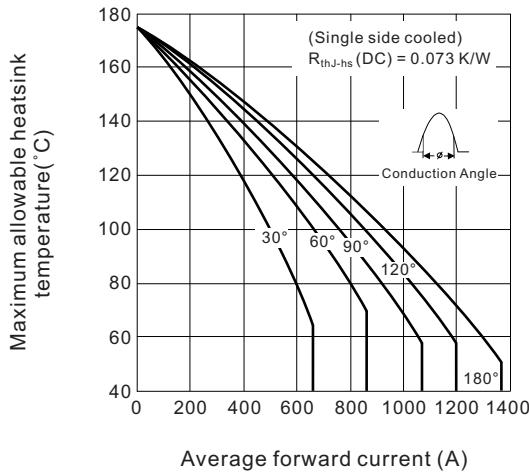
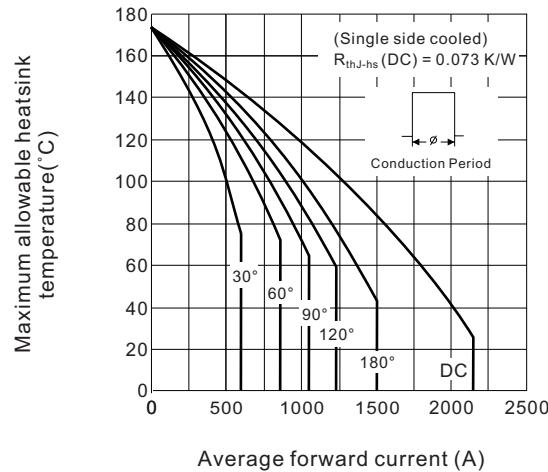
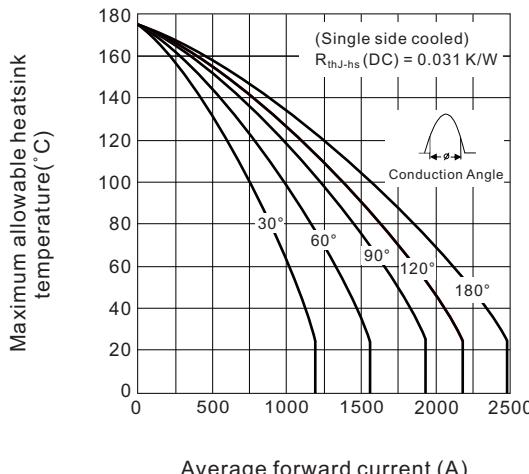
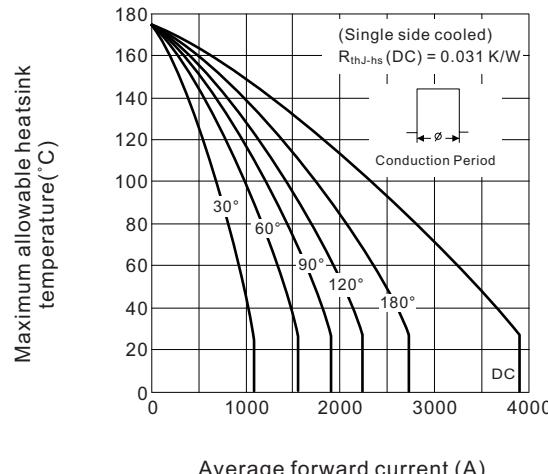
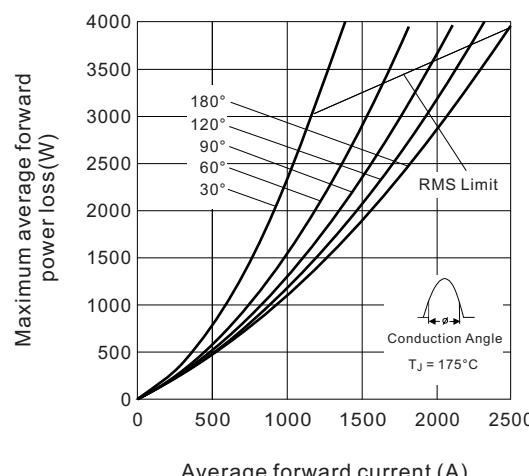
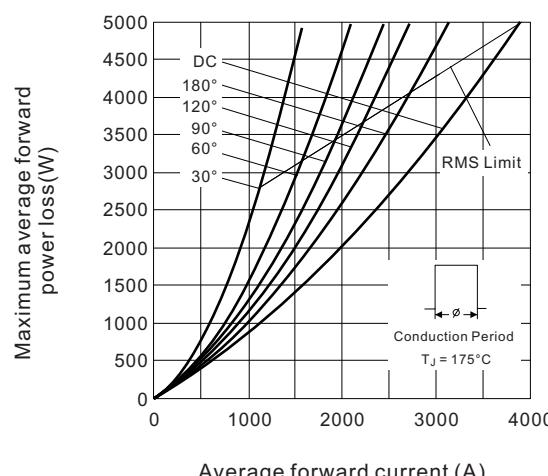
FORWARD CONDUCTION							
PARAMETER	SYMBOL	TEST CONDITIONS			VALUES	UNIT	
Maximum average forward current at heatsink temperature	$I_{F(AV)}$	180° conduction, half sine wave Double side (single side) cooled			2060(1040)	A	
				55 (85)	°C		
Maximum RMS forward current	$I_{F(RMS)}$	25°C heatsink temperature double side cooled			3900	A	
Maximum peak, one cycle non-repetitive surge current	I_{FSM}	$t = 10\text{ms}$	No voltage reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	23900	A	
		$t = 8.3\text{ms}$			25020		
		$t = 10\text{ms}$	100% V_{RRM} reapplied		20070		
		$t = 8.3\text{ms}$			21020		
Maximum I^2t for fusing	I^2t	$t = 10\text{ms}$	No voltage reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	2856	kA^2s	
		$t = 8.3\text{ms}$			2598		
		$t = 10\text{ms}$	100% V_{RRM} reapplied		2014		
		$t = 8.3\text{ms}$			1834		
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	$t = 0.1 \text{ to } 10 \text{ ms, no voltage reapplied}$			28560	$\text{kA}^2\sqrt{\text{s}}$	
Low level value of threshold voltage	$V_{F(TO)1}$	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}, T_J = T_J \text{ maximum})$			0.74	V	
High level value of threshold voltage	$V_{F(TO)2}$	$(I > \pi \times I_{F(AV)}, T_J = T_J \text{ maximum})$			0.86		
Low level value of forward slope resistance	r_{t1}	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}, T_J = T_J \text{ maximum})$			0.13	$\text{m}\Omega$	
High level value of forward slope resistance	r_{t2}	$(I > \pi \times I_{F(AV)}, T_J = T_J \text{ maximum})$			0.12		
Maximum forward voltage drop	V_{FM}	$I_{pk} = 6000\text{A}, T_J = T_J \text{ maximum, } t_p = 10 \text{ ms sinusoidal wave}$			1.60	V	

THERMAL AND MECHANICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS			VALUES	UNIT
Maximum junction operating temperature range	T_J				-40 to 175	°C
Maximum storage temperature range	T_{stg}				-40 to 200	
Maximum thermal resistance, junction to heatsink	R_{thJ-hs}	DC operation single side cooled			0.073	K/W
		DC operation double side cooled			0.031	
Mounting force, ±10%					14700 (1500)	N (kg)
Approximate weight					255	g
Case style		TO-200AB (B-PUK), Nell's C-type Capsule				

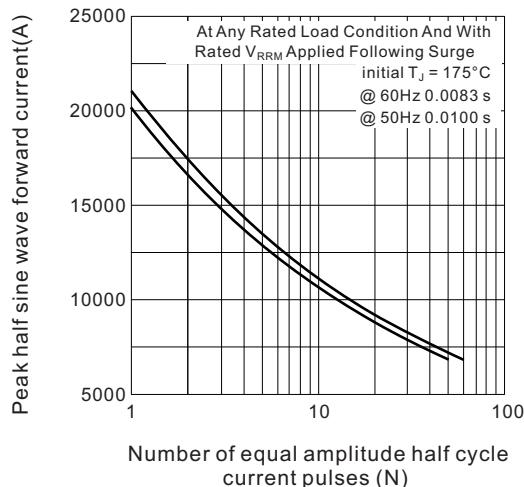
△ R_{thJc} CONDUCTION						
CONDUCTION ANGEL	SINUSOIDAL CONDUCTION		RECTANGULAR CONDUCTION		TEST CONDUCTIONS	UNITS
	SINGLE SIDE	DOUBLE SIDE	SINGLE SIDE	DOUBLE SIDE		
180°	0.009	0.009	0.006	0.006	$T_J = T_J$ maximum	K/W
120°	0.011	0.011	0.011	0.011		
90°	0.014	0.014	0.015	0.015		
60°	0.020	0.020	0.021	0.021		
30°	0.035	0.035	0.036	0.036		

Note

- The table above shows the increment of thermal resistance R_{thJ-hs} when devices operate at different conduction angles than DC

Fig.1 Current ratings characteristics

Fig.2 Current ratings characteristics

Fig.3 Current ratings characteristics

Fig.4 Current ratings characteristics

Fig.5 Forward power loss characteristics

Fig.6 Forward power loss characteristics


**Fig.7 Maximum non-repetitive surge current
single and double side cooled**



**Fig.8 Maximum non-repetitive surge current
single and double side cooled**

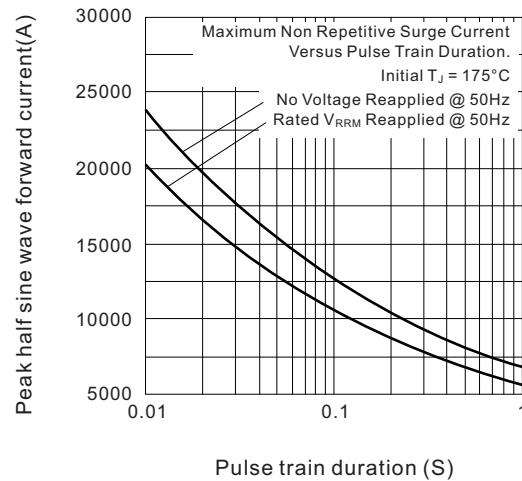


Fig.9 Forward voltage drop characteristics

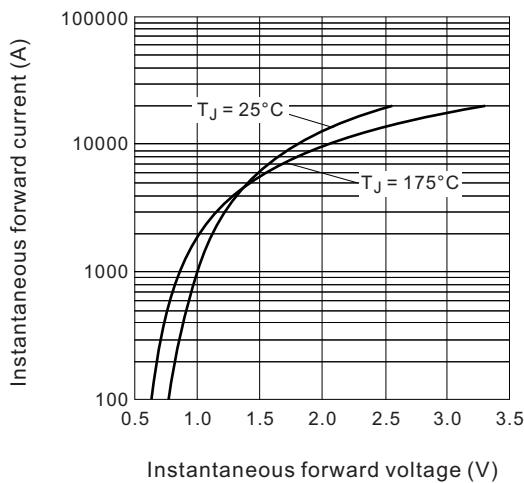
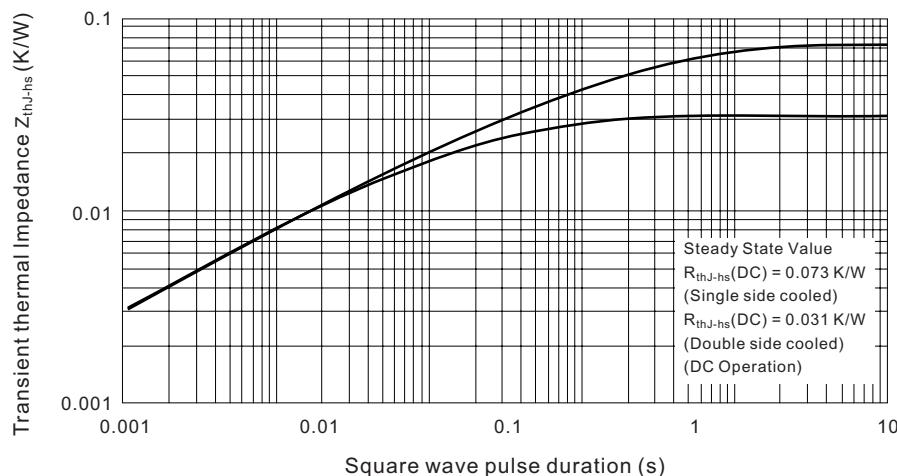
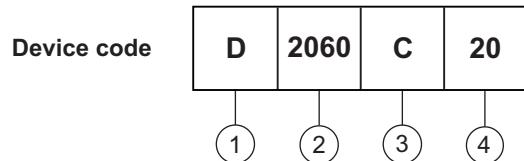
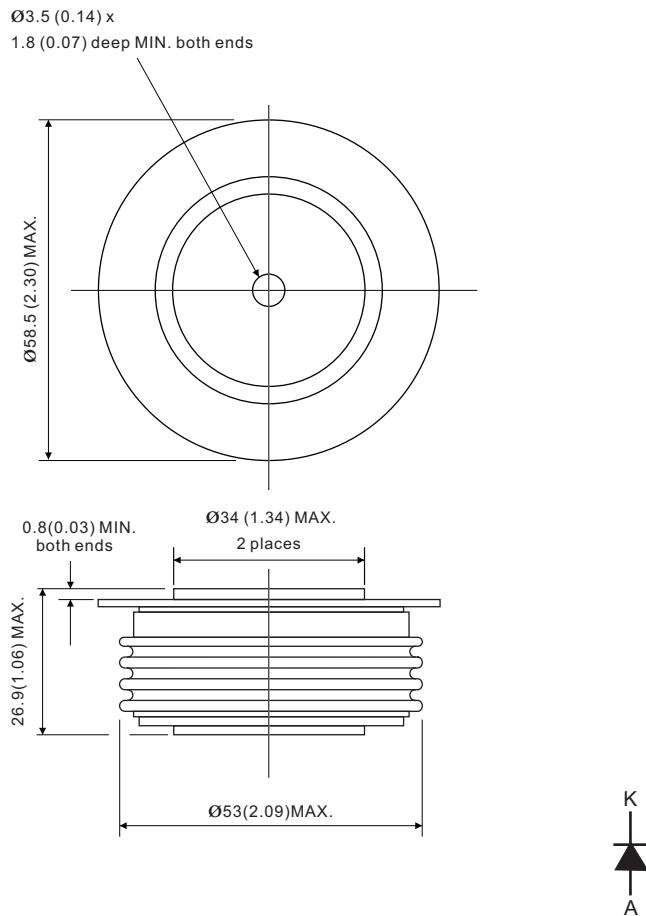


Fig.10 Thermal Impedance Z_{thJ-hs} characteristics



ORDERING INFORMATION TABLE


- 1 - "D" for standard recovery diode
- 2 - Maximum average forward current, "2060" for 2060A
- 3 - Case style : "C" for Nell's C-type Capsule, DO-200AB (B-PUK)
- 4 - Voltage code, code x 100 = V_{RRM}

DO-220AB (B-PUK), Nell's C-type Capsule


All dimensions in millimeters (inches)