

Schottky Barrier Rectifiers

D5PS150--D5PS200

Features

- Metal silicon junction, majority carrier conduction
- High surge capability
- High temperature soldering guaranteed:
260°C/10 seconds
- High current capability, low forward voltage drop
- RoHS Compliant



Top View

Bottom View

LEFT PIN →
RIGHT PIN → BOTTOMSIDE
HEAT SINK

Mechanical Data

- Case: TO-277B molded plastic
- Molding compound, UL flammability classification rating 94V-0
- Terminals: Solder plated, solderable per MIL- STD-202, Method 208

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

| Characteristic | Symbol | D5PS150 | D5PS200 | Units |
|--|-------------|---------|---------|-------|
| Peak repetitive reverse voltage | V_{RRM} | 150 | 200 | V |
| RMS reverse voltage | V_{RMS} | 105 | 140 | V |
| DC blocking voltage | V_{DC} | 150 | 200 | V |
| Maximum average forward output current | $I_{F(AV)}$ | 5.0 | | A |
| Peak forward surge current, 8.3ms single half-sine-wave | I_{FSM} | 150 | | A |

Thermal Characteristics

| Parameter | Symbol | D5PS150 | D5PS200 | Units | |
|--|-----------------|-----------------|---------|-----------------------------|--|
| Typical thermal resistance (Note 1) | $R_{\theta JA}$ | 60 | | $^{\circ}\text{C}/\text{W}$ | |
| | $R_{\theta JC}$ | 20 | | | |
| | $R_{\theta JL}$ | 15 | | | |
| Operating junction temperature range | T_J | - 55 ---- + 150 | | $^{\circ}\text{C}$ | |
| Storage temperature range | T_{STG} | - 55 ---- + 150 | | $^{\circ}\text{C}$ | |

Note:

1. Device mounted on PCB with 10 mm x 20 mm x 0.1mm copper pad areas

Schottky Barrier Rectifiers

D5PS150--D5PS200

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test conditions | | Typ. | Max. | Units |
|--|--------|-------------------|---------------------------|------|------|---------------|
| Maximum instantaneous forward voltage (Note 1) | V_F | $I_F=5.0\text{A}$ | @ $T_A=25^\circ\text{C}$ | -- | 0.95 | V |
| Maximum Reverse current (Note 2) | I_R | Rated V_R , | @ $T_J=25^\circ\text{C}$ | -- | 250 | μA |
| | | | @ $T_J=100^\circ\text{C}$ | -- | 10 | m A |

Note:

1.Pulse test: 300us pulse width, 1 % duty cycle

2.Pulse test: Pulse width 40ms

Schottky Barrier Rectifiers

D5PS150--D5PS200

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1-Forward Current Derating Curve

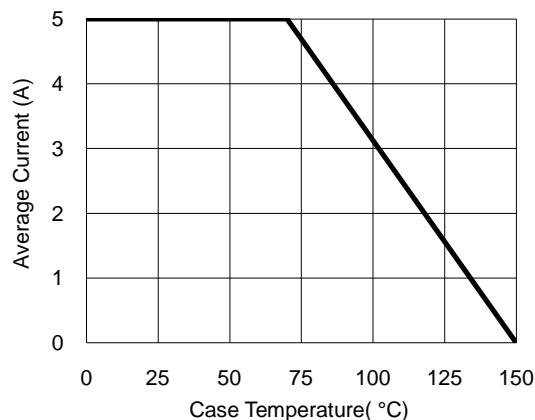


Fig.2- Surge Current Derating Curve

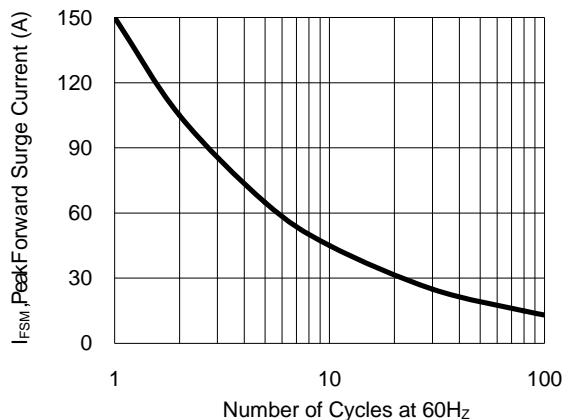


Fig.3- Typical Forward Voltage Characteristic


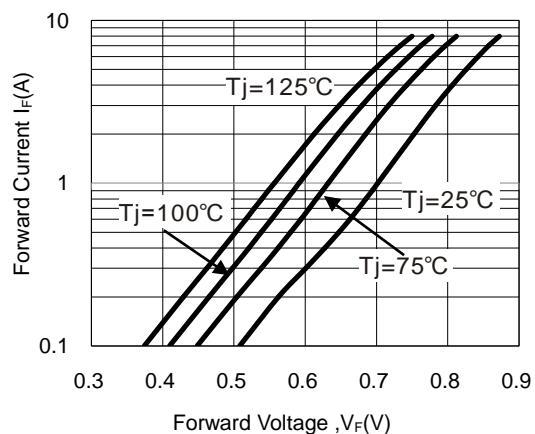



Fig.4- Typical Reverse Characteristic

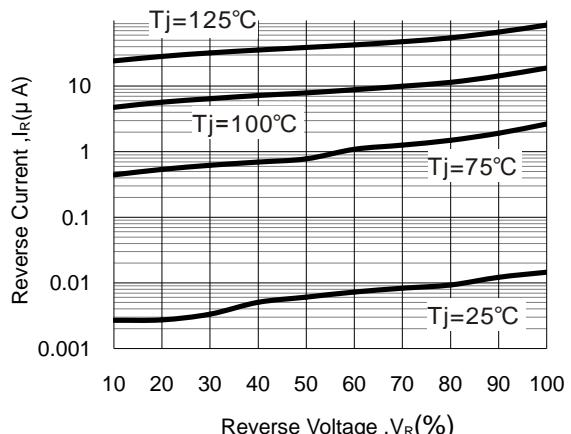


Schottky Barrier Rectifiers

D5PS150--D5PS200

Package Outline Dimensions(unit:mm)

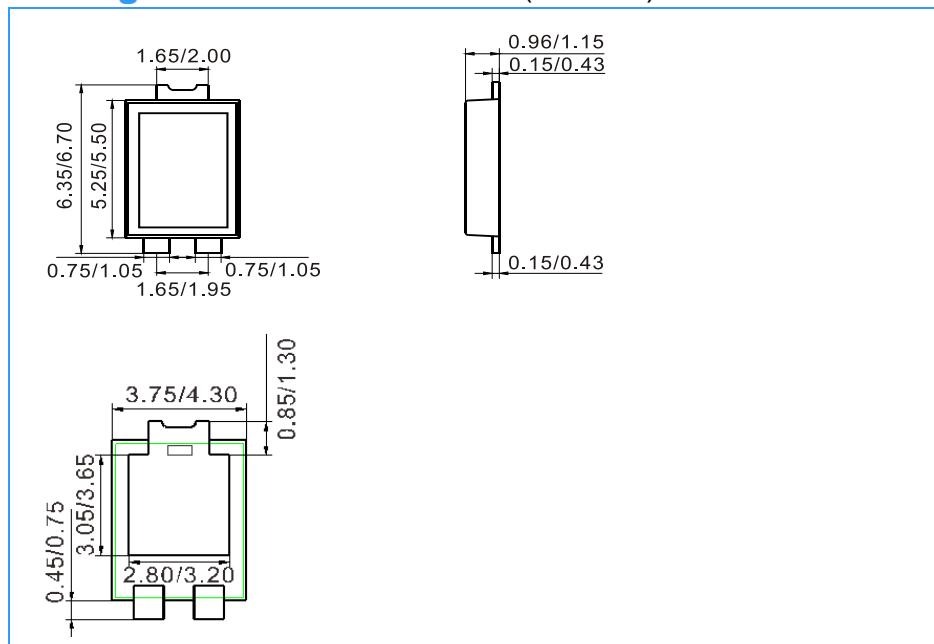

Mounting Pad Layout(unit:mm)

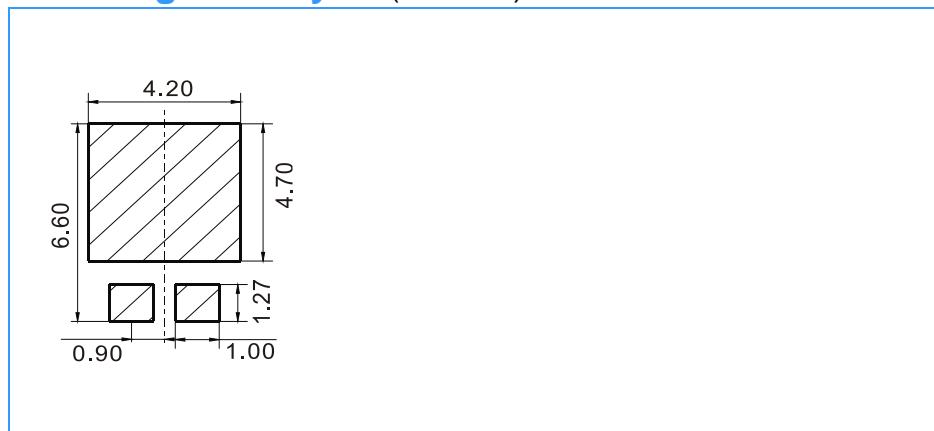

Ordering Information

| Part No. | Marking | Package | Shipping |
|----------|---------|---------|----------------|
| D5PS150 | D5SC | TO-277B | 4000/Tape&Reel |
| D5PS200 | D5SD | TO-277B | 4000/Tape&Reel |