



POWER-MOS FET

FIELD EFFECT POWER TRANSISTOR

**IRF450,451
D86FR2,R1**


13 AMPERES
500, 450 VOLTS
 $R_{DS(ON)} = 0.4 \Omega$

This series of N-Channel Enhancement-mode Power MOSFETs utilizes GE's advanced Power DMOS technology to achieve low on-resistance with excellent device ruggedness and reliability.

This design has been optimized to give superior performance in most switching applications including: switching power supplies, inverters, converters and solenoid/relay drivers. Also, the extended safe operating area with good linear transfer characteristics makes it well suited for many linear applications such as audio amplifiers and servo motors.

Features

- Polysilicon gate — Improved stability and reliability
- No secondary breakdown — Excellent ruggedness
- Ultra-fast switching — Independent of temperature
- Voltage controlled — High transconductance
- Low input capacitance — Reduced drive requirement
- Excellent thermal stability — Ease of paralleling

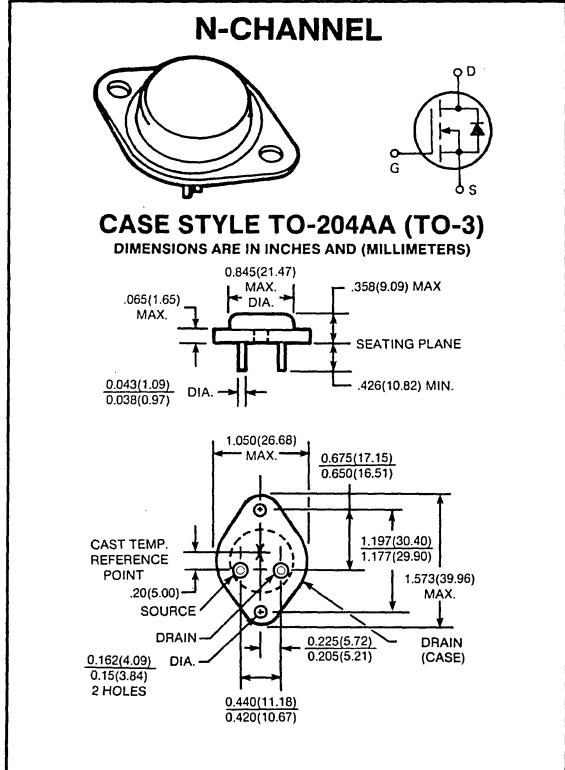

maximum ratings ($T_C = 25^\circ C$) (unless otherwise specified)

RATING	SYMBOL	IRF450/D86FR2	IRF451/D86FR1	UNITS
Drain-Source Voltage	V_{DSS}	500	450	Volts
Drain-Gate Voltage, $R_{GS} = 1M\Omega$	V_{DGR}	500	450	Volts
Continuous Drain Current @ $T_C = 25^\circ C$ @ $T_C = 100^\circ C$	I_D	13 8	13 8	A A
Pulsed Drain Current ⁽¹⁾	I_{DM}	52	52	A
Gate-Source Voltage	V_{GS}	± 20	± 20	Volts
Total Power Dissipation @ $T_C = 25^\circ C$ Derate Above $25^\circ C$	P_D	150 1.2	150 1.2	Watts $W^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to 150	-55 to 150	°C

thermal characteristics

Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.83	0.83	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	30	30	°C/W
Maximum Lead Temperature for Soldering Purposes: $1/8"$ from Case for 5 Seconds	T_L	260	260	°C

(1) Repetitive Rating: Pulse width limited by max. junction temperature.

electrical characteristics ($T_C = 25^\circ C$) (unless otherwise specified)

CHARACTERISTIC	SYMBOL	MIN	TYP	MAX	UNIT
off characteristics					
Drain-Source Breakdown Voltage ($V_{GS} = 0V$, $I_D = 250 \mu A$)	I_{RDSS} $I_{RF451/D86FR1}$	500 450	—	—	Volts
Zero Gate Voltage Drain Current ($V_{DS} = \text{Max Rating}$, $V_{GS} = 0V$, $T_C = 25^\circ C$) ($V_{DS} = \text{Max Rating} \times 0.8$, $V_{GS} = 0V$, $T_C = 125^\circ C$)	I_{DSS}	— —	— —	250 1000	μA
Gate-Source Leakage Current ($V_{GS} = \pm 20V$)	I_{GSS}	—	—	± 100	nA

on characteristics*

Gate Threshold Voltage ($V_{DS} = V_{GS}$, $I_D = 250 \mu A$)	$T_C = 25^\circ C$	$V_{GS(TH)}$	2.0	—	4.0	Volts
On-State Drain Current ($V_{GS} = 10V$, $V_{DS} = 10V$)		$I_{D(ON)}$	13	—	—	A
Static Drain-Source On-State Resistance ($V_{GS} = 10V$, $I_D = 7A$)		$R_{DS(ON)}$	—	0.3	0.4	Ohms
Forward Transconductance ($V_{DS} = 10V$, $I_D = 7A$)		g_{fs}	4.8	7.0	—	mhos

dynamic characteristics

Input Capacitance	$V_{GS} = 0V$ $V_{DS} = 25V$ $f = 1 \text{ MHz}$	C_{iss}	—	2800	3000	pF
Output Capacitance		C_{oss}	—	330	600	pF
Reverse Transfer Capacitance		C_{rss}	—	55	200	pF

switching characteristics*

Turn-on Delay Time	$V_{DS} = 225V$ $I_D = 7A$, $V_{GS} = 15V$ $R_{GEN} = 50\Omega$, $R_{GS} = 12.5\Omega$ (R_{GS} (EQUIV.) = 10Ω)	$t_{d(on)}$	—	25	—	ns
Rise Time		t_r	—	20	—	ns
Turn-off Delay Time		$t_{d(off)}$	—	120	—	ns
Fall Time		t_f	—	65	—	ns

source-drain diode ratings and characteristics*

Continuous Source Current	I_S	—	—	13	A
Pulsed Source Current	I_{SM}	—	—	52	A
Diode Forward Voltage ($T_C = 25^\circ C$, $V_{GS} = 0V$, $I_S = 13A$)	V_{SD}	—	0.9	1.4	Volts
Reverse Recovery Time ($I_S = 13A$, $dI_S/dt = 100A/\mu s$, $T_C = 125^\circ C$)	t_{rr} Q_{RR}	—	590 7.4	—	ns μC

*Pulse Test: Pulse width $\leq 300 \mu s$, duty cycle $\leq 2\%$

