



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

D965-T D965-R

Features

- Power Dissipation: $P_{CM}=0.75W$ @ $T_{amb}=25^{\circ}C$
- Collector Current: $I_{CM}=5A$
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Marking: D965R/T

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	22	V
V_{CBO}	Collector-Base Voltage	42	V
V_{EBO}	Emitter-Base Voltage	6.0	V
I_C	Collector Current, Continuous	5	A
P_D	Total Device Dissipation	750	mW
T_J	Operating Junction Temperature	-55 to +150	$^{\circ}C$
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}C$

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS


$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage* ($I_C=10mA$, $I_B=0$)	22	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=100\mu A$, $I_E=0$)	42	---	Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_E=100\mu A$, $I_C=0$)	6.0	---	Vdc
I_{CBO}	Collector Cutoff Current ($V_{CB}=20Vdc$, $I_E=0$)	---	100	nAdc
I_{EBO}	Base Cutoff Current ($V_{EB}=3.0Vdc$, $I_C=0$)	---	100	nAdc
H_{FE}	DC Current Gain ($V_{CE}=2V$, $I_C=0.15mA$) ($V_{CE}=2V$, $I_C=500mA$) ($V_{CE}=2V$, $I_C=2000mA$)	150 340 150	---	950
$V_{CE(sat)}$	Collector-emitter Saturation Voltage ($I_C=3000mA$, $I_B=100mA$)	---	0.35	V

Classification of H_{FE} @ ($V_{CE}=2V$, $I_C=500mA$)

Rank	R	T
Range	340-600	560-950

NPN Plastic-Encapsulate Transistors

TO-92

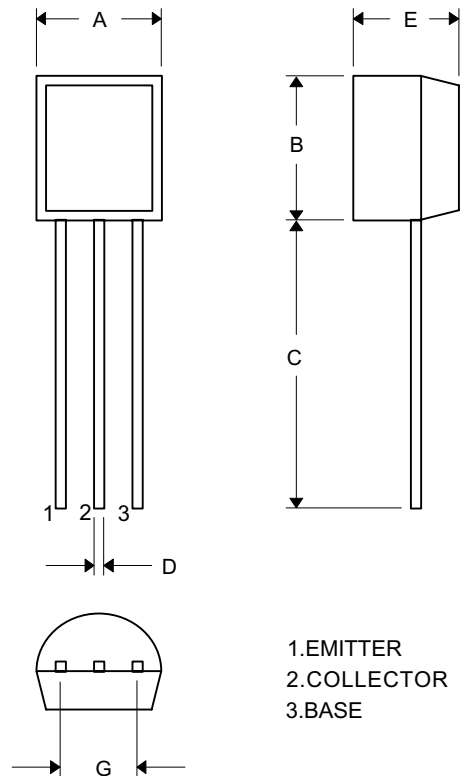

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.170	.190	4.33	4.83	
B	.170	.190	4.30	4.83	
C	.550	.590	13.97	14.97	
D	.010	.020	0.36	0.56	
E	.130	.160	3.30	3.96	
G	.010	.104	2.44	2.64	



TM

Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.